

SMA-M CONNECTOR LMR240 CRIMP

SC7035

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-12 GHZ
VSWR 1.3:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55°C- +85°C

MECHANICAL:



MATERIAL BODY: NICKLE PLATED BRASS
CENTER CONTACT: BRASS
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON

ROHS COMPLIANT

CABLES: LMR240 & LMR240 ULTRAFLEX
BELDEN 9258, RG-8/X

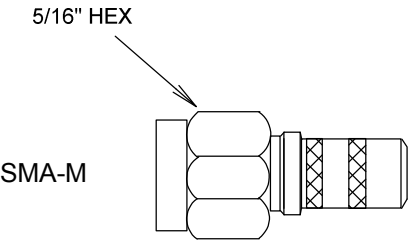

RECOMMENDED CRIMP DIE: .255"



STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA-M CONNECTOR LMR240 CRIMP

SIZE

A

CAGE CODE

3FKR5

DWG NO

SC7035

REV

--

SCALE

SHEET