

HN-M RG55 RG142 RG223 RG400 CRIMP

SC4825

SPECIFICATIONS





ELECTRICAL:

FREQUENCY: 0-10 GHZ
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BRASS
BODY PLATING: NICKEL
CENTER CONTACT: BRASS
CONTACT PLATING: Au 30 μ -in
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A
OP. TEMP RANGE: -55°C to +120°C

ROHS COMPLIANT

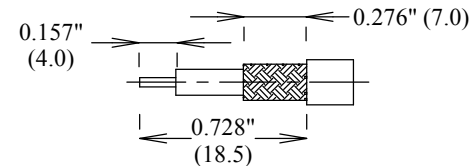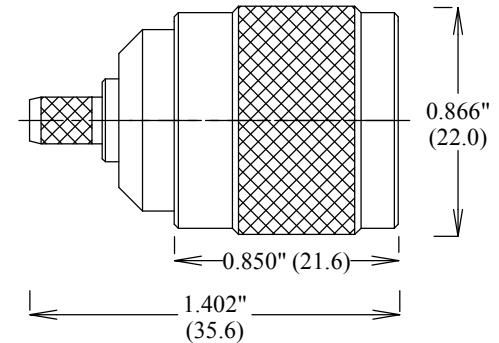

ASSEMBLY INSTRUCTIONS

1. STRIP CABLE TO DIMENSIONS SHOWN
2. INSERT CABLE CENTER CONDUCTOR UNTIL CABLE DIELECTRIC LIES FLUSH AGAINST CENTER CONTACT
3. SOLDER CENTER CONTACT TO CENTER CABLE CONDUCTOR
4. SLIDE BRAID CLAMP UNTIL IT SEATS AGAINST CABLE JACKET
5. FOLD BACK BRAID WIRE TO COVER ON OUTSIDE OF BRAID CLAMP
6. INSERT CABLE ASSEMBLY AND HARDWARE ONTO CONNECTOR BODY

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**HN-M RG55 RG142 RG223 RG400
CRIMP**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC4825	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical