


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

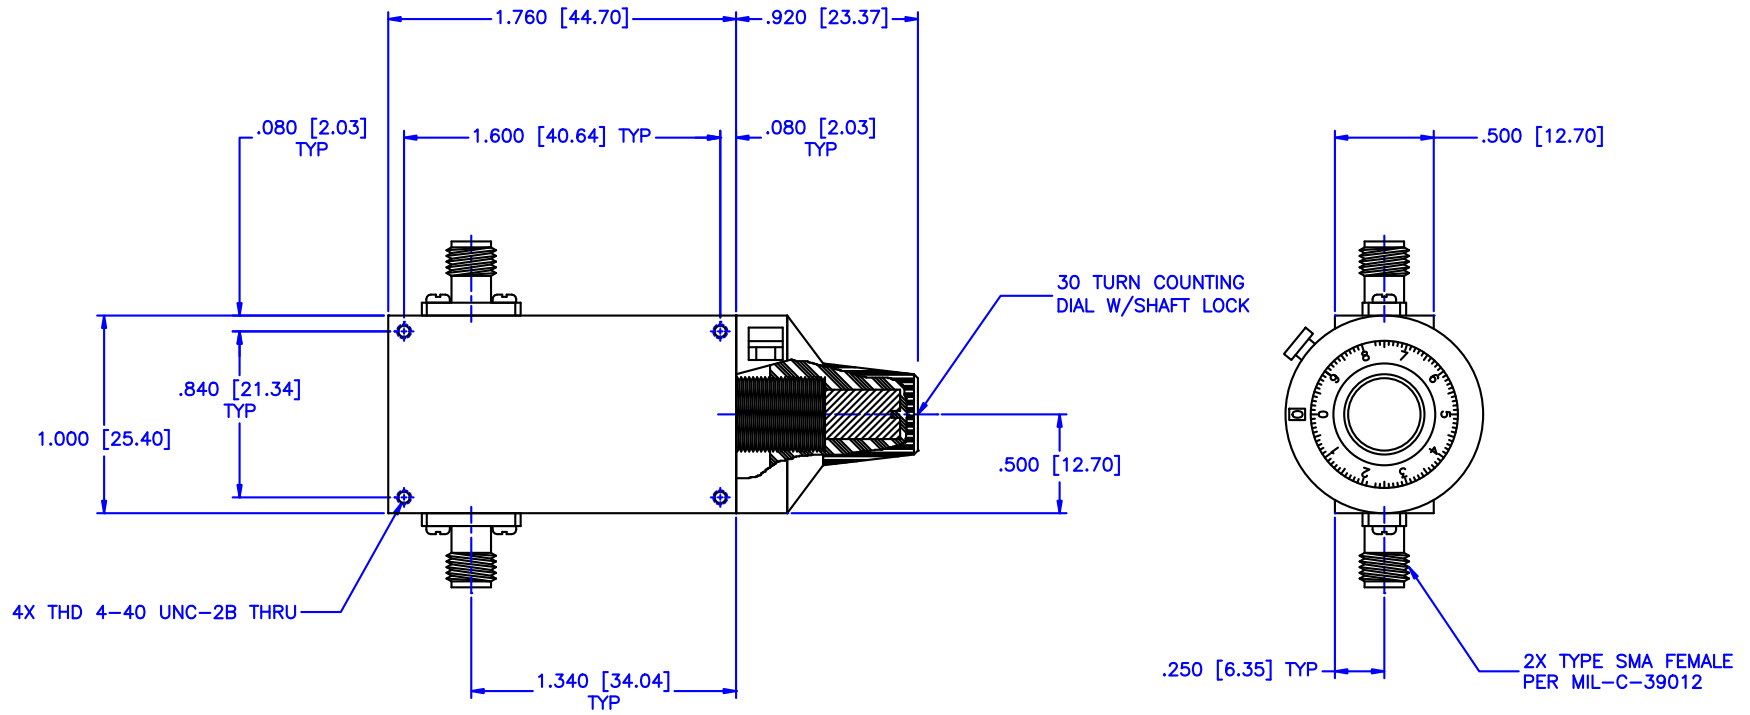

Specifications:

Frequency Range: 6–11 GHz
 Attenuation: 40 dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 RF Power: 7W Average / 3kW Peak

Environmental

Temperature range: -55°C to +110°C
 Shock: 15 G's, 11ms, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000 ft. Survival 25,000ft Operating

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:		
			N/A		
		DRAWING TITLE:		SHEET:	
		CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL		N/A	
		PART NO.			
		CVA9-40/D			
DRAWN:		DATE:		CAGE CODE:	
Paiboon Luekhamhan		02-08-2011		0D2L5	
APPROVED:		DATE:		SIZE: A	
T. Nguyen		02-08-2011		REV: N/A	
		THIRD ANGLE PROJECTION		DWG NO.	
				85426	
		DO NOT SCALE THE DRAWING			