


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

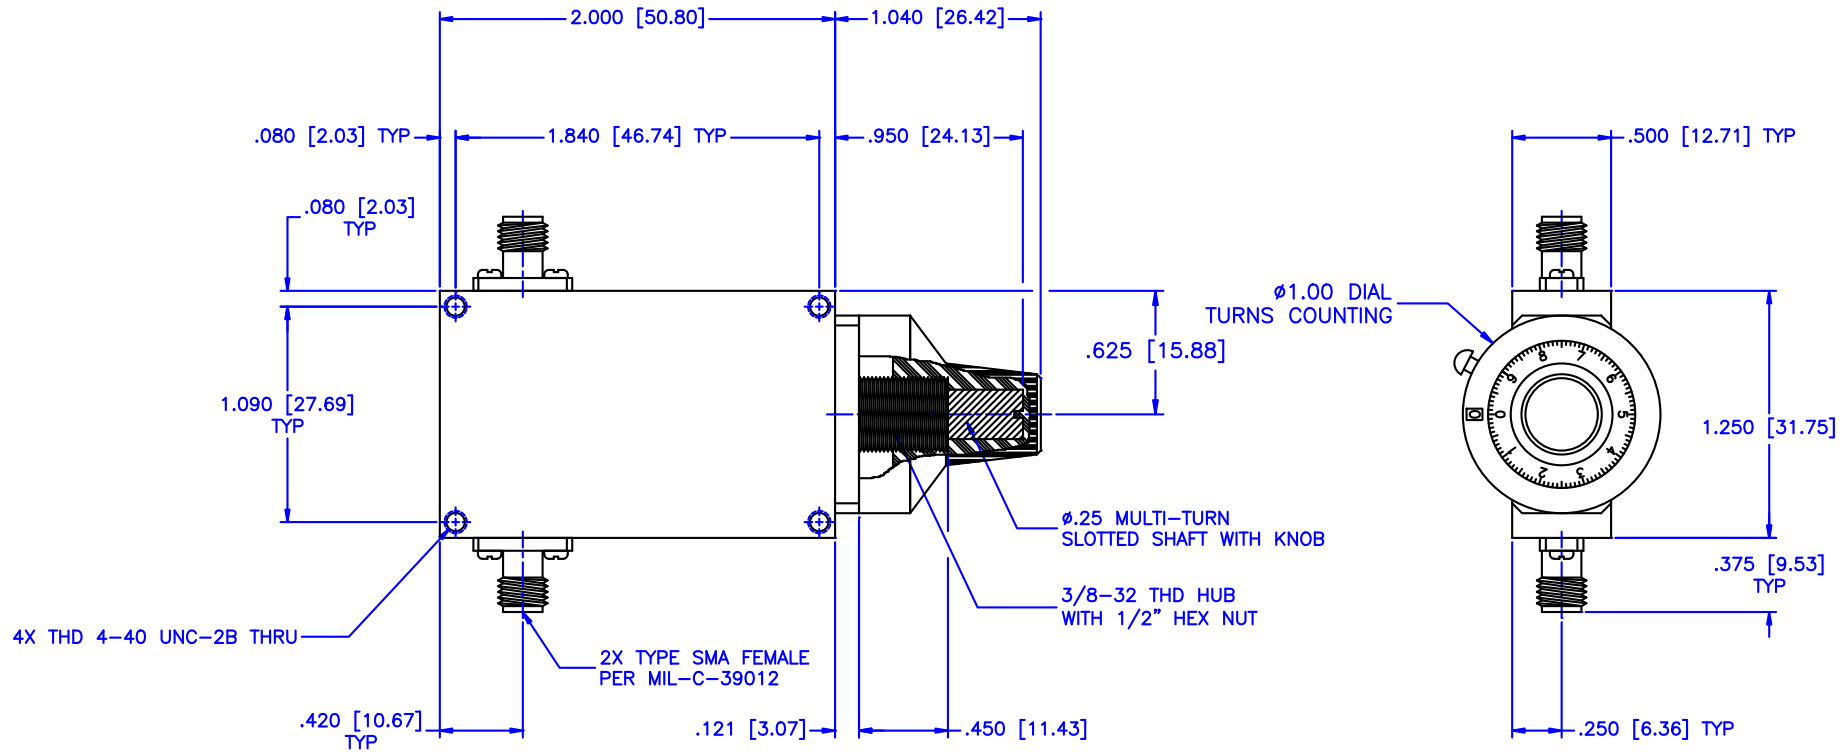

SPECIFICATION:

Frequency Range: 8–12.4 GHz
 Attenuation: 20dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 Attenuation Vs Frequency: ±1.00dB

Environmental:

Temperature range: –55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000 ft. Survival
 25,000ft Operating

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 10-20-2010		DRAWING TITLE: ATTENUATOR WITH DIAL	
APPROVED: T. Nguyen		DATE: 10-20-2010		PART NO. CA10-20/D	
THIRD ANGLE PROJECTION		CAGE CODE:	SIZE: A	REV: A	DWG NO.
		OD2L5	DO NOT SCALE THE DRAWING		82228