


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

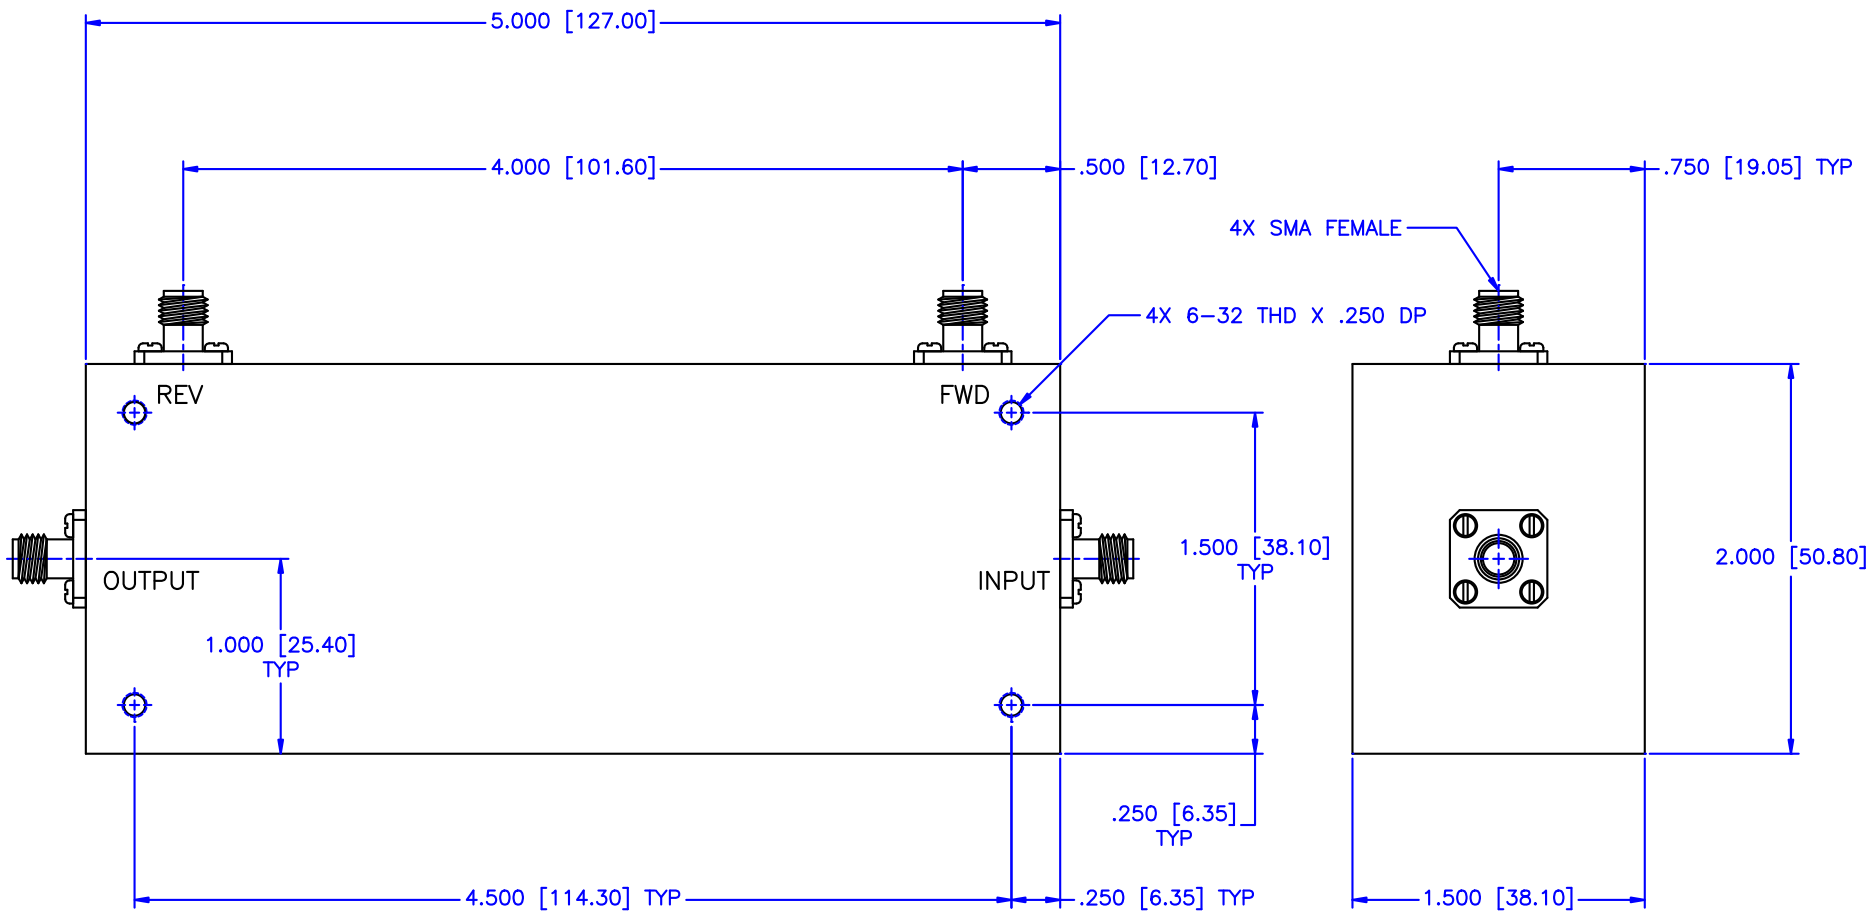

PERFORMANCE

- FREQUENCY RANGE: 20–500 MHz
- FLATNESS: 40±.05 dB Max.
- DIRECTIVITY: 20 dB Min.
- INSERTION LOSS: 0.35 dB Max.
- VSWR (M): 1.30:1 Max.
- POWER: 200 Watts CW

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER
DRAWN:		DATE:	PART NO.		HDL-25-40	
Paiboon Luexhamhan		08-24-2006	CAGE CODE:		SIZE:	REV:
APPROVED:		DATE:	OD2L5		N/A	N/A
T. Nguyen		08-24-2006	DO NOT SCALE THE DRAWING		DWG NO. 82635	