

SMP F/F ADAPTER

SM2610


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
VSWR 1.20:1 MAX @ 26.5GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACTS: BeCU
PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON
INTERFACE: SMP DESC 94007

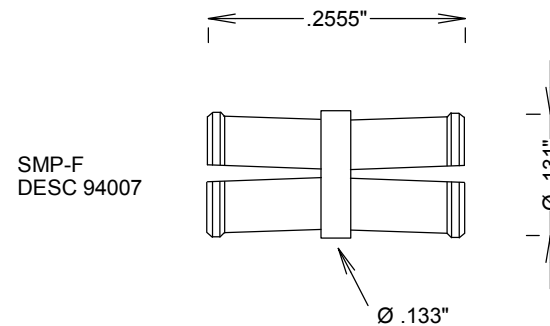

	FAIRVIEW MICROWAVE INC.				
	ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM				
	TITLE				
	SMP F/F ADAPTER				
	SIZE	CAGE CODE	DWG NO		REV
	A	3FKR5	SM2610		--
	SCALE				SHEET