



## WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz

### Waveguide Twists Technical Data Sheet

PE-W112TF006-24

#### Features

- Twenty four inch long WR-112 waveguide
- Twistable
- Flexes in both the E and H plane
- Neoprene sleeve allows pressurization
- 7.05 GHz to 10 GHz Frequency Range
- Brass flanges with a silver plated brass body

#### Applications

- Simplifies positioning parabolic reflectors for line of sight microwave radio links.
- Test Benches
- Eliminates installation problems caused by misalignment.
- Allows expansion/contraction due to thermal issues.
- Pressurized waveguide systems
- Provides vibration isolation
- Microwave Radio

#### Description

The PE-W112TF006-24 is part of Pasternack's family of flexible, twistable waveguides which operates in the 7.05 to 10 GHz range. The waveguide body is made of a helically wound silver coated brass strip. It can be twisted and/or bent in both the E and H planes without impairing VSWR or attenuation. The waveguide is covered by a neoprene jacket which protects the waveguide, provides mechanical support and allows the waveguide to be pressurized.

#### Electrical Specifications

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | 7.05    |         | 10      | GHz   |
| VSWR            |         | 1.07:1  |         |       |
| Insertion Loss  |         | 0.24    |         | dB    |

#### Mechanical Specifications

|                                       |                  |
|---------------------------------------|------------------|
| Waveguide Size                        | WR-112           |
| Waveguide Design                      | Twistable        |
| Section Length                        | 24 in [609.6 mm] |
| E-Plane Minimum Bend Radius, One Time | 3 in [76.2 mm]   |
| E-Plane Minimum Bend Radius, Repeated | 12 in [304.8 mm] |
| H-Plane Minimum Bend Radius, One Time | 6 in [152.4 mm]  |
| H-Plane Minimum Bend Radius, Repeated | 24 in [609.6 mm] |
| Maximum Offset Rotation, One Time     | 80 degrees/ft    |
| Maximum Offset Rotation, Repeated     | 20 degrees/ft    |
| Maximum Operating Pressure            | 35 psig          |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112TF006-24](#)



WR-112 Flexible Waveguide Twist With a CPR-112G  
Flange Operating From 7.05 GHz to 10 GHz

Waveguide Twists Technical Data Sheet

PE-W112TF006-24

| Description | Flange 1 | Waveguide | Flange 2 |
|-------------|----------|-----------|----------|
| Interface   | CPR-112G | WR-112    | CPR-112G |
| Material    | Brass    | Brass     | Brass    |
| Plating     |          | Silver    |          |
| Color       | Gold     | Black     | Gold     |

**Environmental Specifications**

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant


REACH Compliant

12/17/2014

**Plotted and Other Data**

Notes:

**Typical Performance Data**

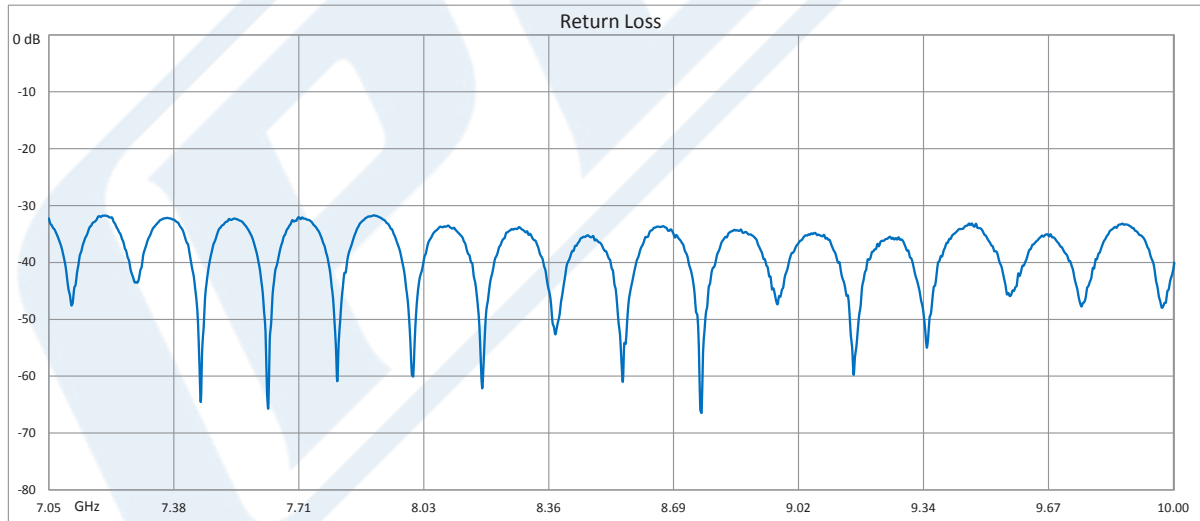

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112TF006-24](#)






WR-112 Flexible Waveguide Twist With a CPR-112G  
Flange Operating From 7.05 GHz to 10 GHz

Waveguide Twists Technical Data Sheet

PE-W112TF006-24

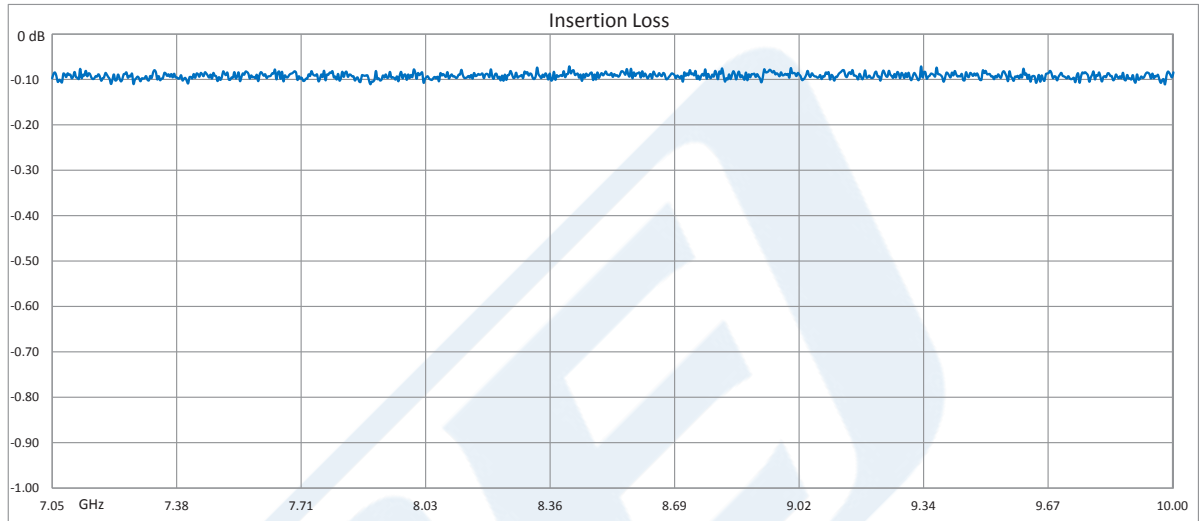

WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112TF006-24](http://www.pasternack.com/wr-112-flexible-waveguide-twist-cpr112g-7.05-10-ghz-pe-w112tf006-24-p.aspx)


URL: <http://www.pasternack.com/wr-112-flexible-waveguide-twist-cpr112g-7.05-10-ghz-pe-w112tf006-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE-W112TF006-24 CAD Drawing


WR-112 Flexible Waveguide Twist With a CPR-112G

Flange Operating From 7.05 GHz to 10 GHz

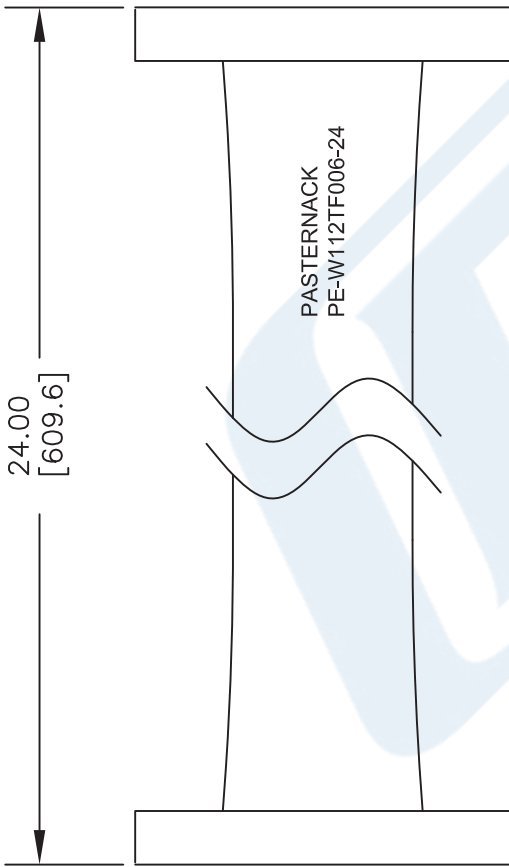

PASTERNAK  
PE-W112TF006-24

| CPR 112G | Dimension | Inches | mm    |
|----------|-----------|--------|-------|
|          | A         | 0.497  | 12.62 |
|          | B         | 1.122  | 28.50 |
|          | C         | 2.500  | 63.50 |
|          | D         | 1.906  | 48.41 |
|          | E         | 0.750  | 19.05 |
|          | F         | 1.750  | 44.45 |
|          | G         | 0.625  | 15.88 |
|          | H         | 1.280  | 32.51 |

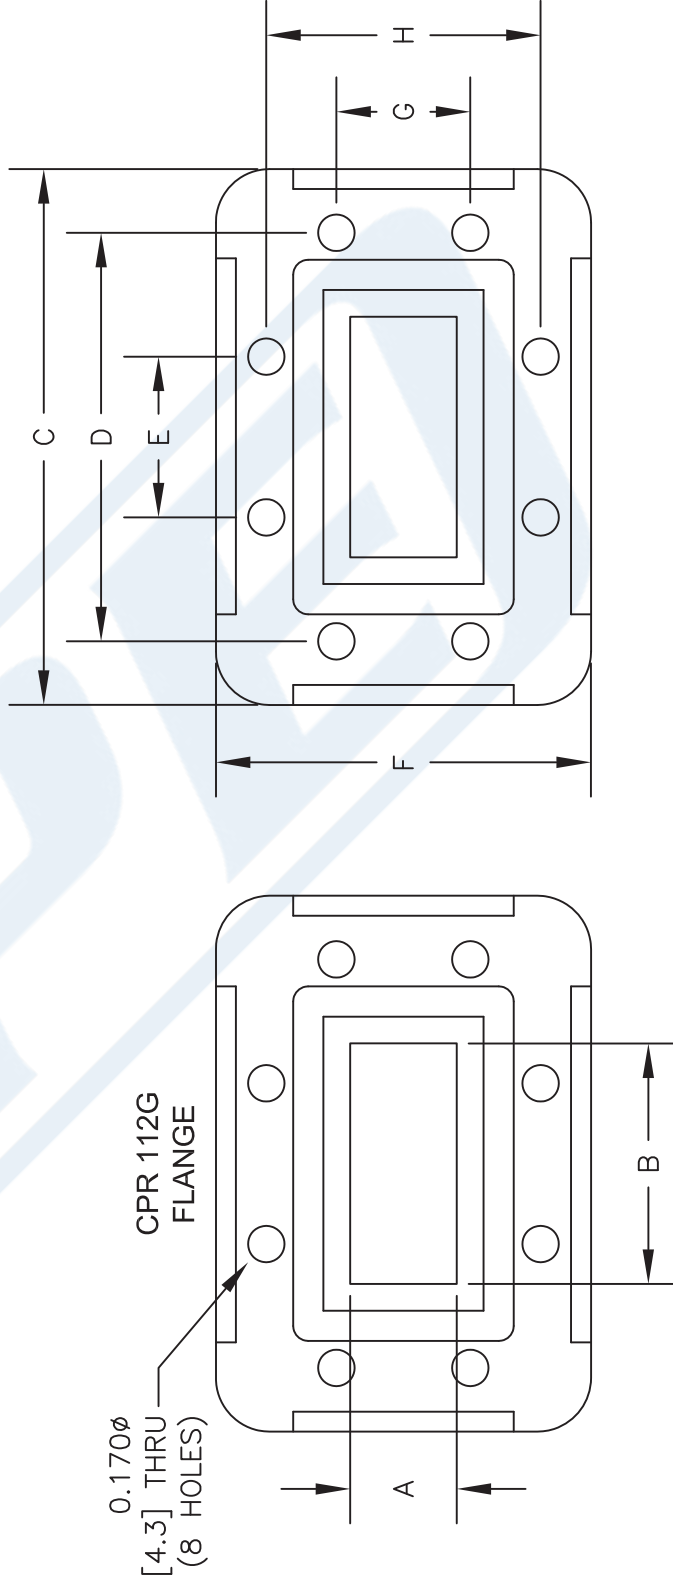

0.170 $\phi$   
[4.3] THRU  
(8 HOLES)

CPR 112G  
FLANGE

DWG TITLE

**PE-W112TF006-24**

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 100115

SCALE N/A

SIZE A

2233

**(PE) PASTERNAK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com