


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

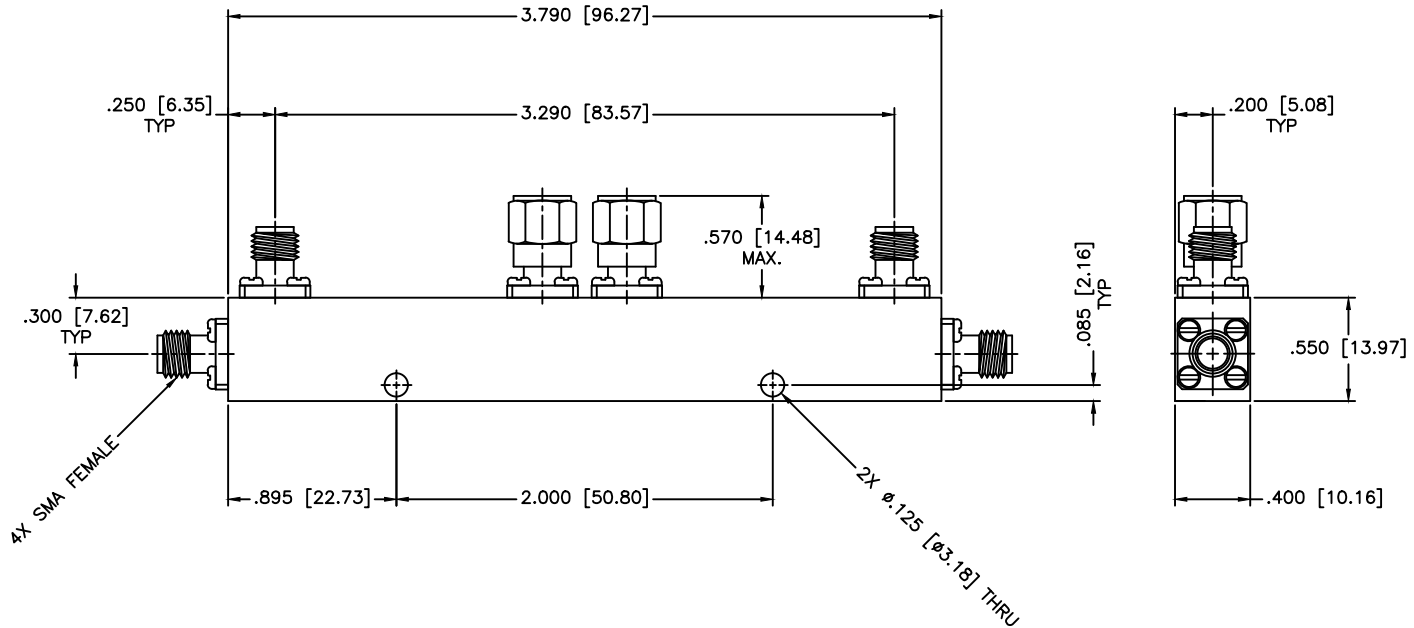

SPECIFICATIONS

Frequency Range: 0.95–2.15 GHz
 Coupling: 10±1.25dB
 VSWR: 1.15:1 Max.
 True Insertion loss: 1.50dB Max.
 Directivity: 22dB Min.
 Frequency Sensitivity: ±0.8dB
 Power Incident/Reflected: 50Watts/3Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		DRAWING TITLE: DUAL DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. DC14-10		
DATE: 11-01-2007		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 11-01-2007		
THIRD ANGLE PROJECTION		SIZE: A REV: N/A DWG. NO. 82968		
		DO NOT SCALE THE DRAWING		