

VI TELEFILTER**Filter Specification****TFS 70H44****1/5****Measurement condition :**

Ambient temperature T_A : 23 °C
 Input power level: 0 dBm
 Terminating impedances in f_C *) : for input: 486 Ω | - 10,2 pF
 for output: 337 Ω | - 12,2 pF

Characteristics :

Remark: Reference level for the relative attenuation a_{rel} of the **TFS 70H44** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The reference frequency f_C is the arithmetic mean value of the upper and lower frequencies at the **3 dB** filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency T_{cf} is valid both for the reference frequency f_C and the frequency response of the filter in the operating temperature range. The frequency shift of the filter in the operating temperature range is not included in the production tolerance scheme.

Data		typ. value	tolerance / limit
Insertion loss (Reference level)	a_e	25 dB	max. 27,5 dB
Centre frequency at ambient temperature (f_{CTA})	f_C	70,0 MHz	70,0 \pm 0,15 MHz
Pass band :	PB		$f_C \pm 12,8$ MHz
Amplitude ripple in PB :		0,6 dB	max. 1 dB
Bandwidth at ambient temperature T_A :	BW		
1 dB		27,25 MHz	min. 25,6 MHz
3 dB		28,97 MHz	min. 28,0 MHz
10 dB		31,76 MHz	
20 dB		34,05 MHz	
40 dB		36,90 MHz	max. 37,7 MHz
Relative attenuation :	a_{rel}		
f_C ... $f_C \pm 12,8$ MHz		-	max. 1 dB
$f_C \pm 12,8$ MHz ... $f_C \pm 14,0$ MHz		-	max. 3 dB
$f_C \pm 18,85$ MHz ... $f_C \pm 25$ MHz		47 dB	min. 40 dB
$f_C \pm 25$ MHz ... $f_C \pm 60$ MHz		53 dB	min. 45 dB
Group delay (mean value in PB):		0,90 μ s	
Group delay ripple in PB (p-p):		38 ns	max. 50 ns
Deviation from linear phase in PB :		5,8 °	max. 8 °
Triple transit attenuation compared to main signal Crosstalk		56 dB	
		60 dB	
Temperature coefficient of frequency (T_{cf}):		- 75 ppm/K	
Frequency deviation of f_C over temperature :		$\Delta f_C(\text{Hz}) = T_{cf}(\text{ppm/K}) \times (T - T_0) \times f_{CTA}(\text{MHz})$	
Operating temperature range			- 25 °C ... + 80 °C
Storage temperature range			- 40 °C ... + 85 °C

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.



generated: _____

checked / approved: _____

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: ft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information


Package and pin connection : (All dimensions in mm)

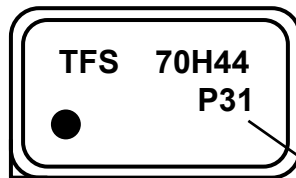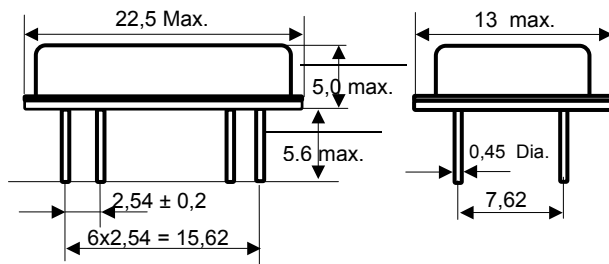

date -code: year + week


M	2000
N	2001
P	2002
...	...

date-code

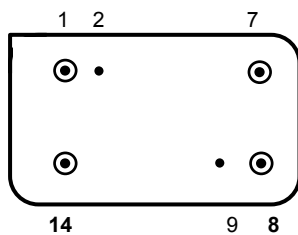

Pin 14	Input
Pin 1	Input RF Return
Pin 8	Output
Pin 7	Output RF Return
Pin 2, 9	Package Ground

50 Ω matching network (for details refer to application note):

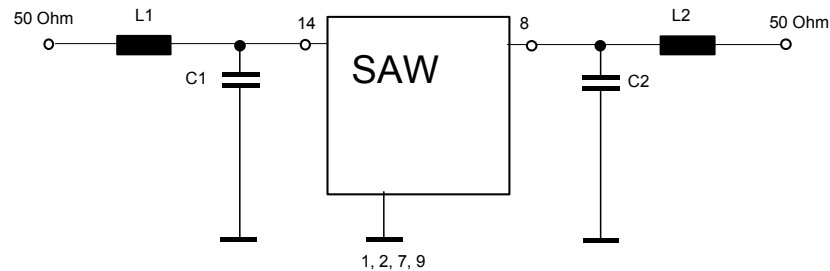

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Stability characteristics :

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

Air reflow temperature conditions :

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

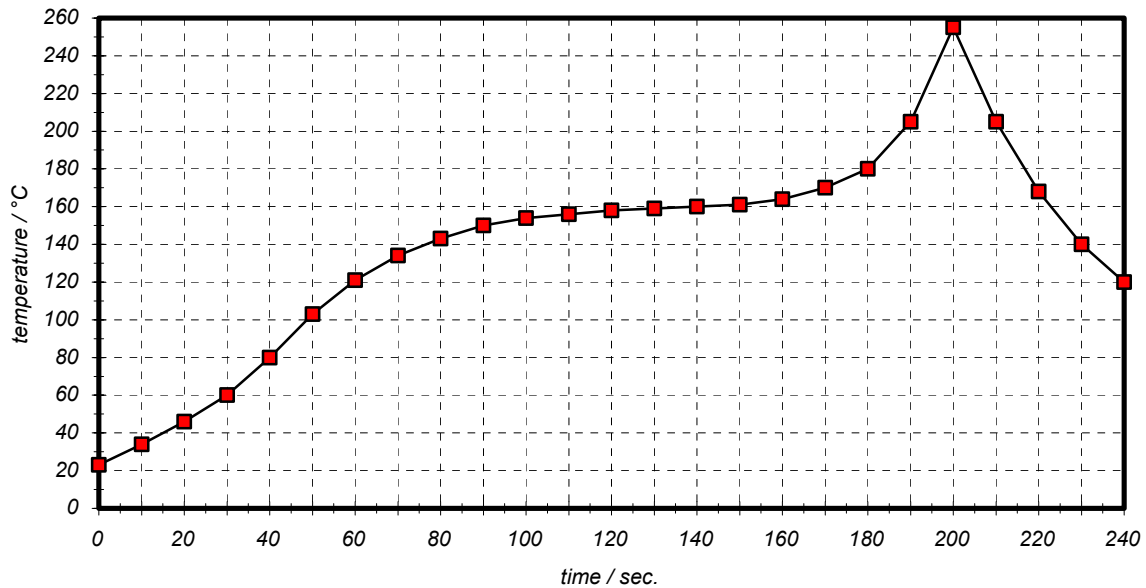
Air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

VI TELEFILTER**Filter Specification****TFS 70H44****5/5****History**

Version	Reason of changes	Name	Date
1.0	generate preliminary specification	Pfeiffer	19.04.2002
1.1	generate filter specification add typical filter values changing matching configuration add terminating impedances	Pfeiffer	21.05.2002
1.2	remove adjustable matching elements → using nonadjustable components changing terminating impedances	Pfeiffer	31.07.2002