

ISOLATOR 8-20 GHZ

SFI0820

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 8-20 GHZ
IMPEDANCE: 50 OHMS
INS LOSS: 1.0 DB MAX
VSWR: 1.45:1 MAX
POWER_{in}: 10W MAX
LOAD: 1W
ISOLATION: 15DB MIN


MECHANICAL

HOUSING: ALUMINUM
CONNECTORS: SMA'S, PASS S STEEL
INTERFACE: MIL-STD-348A
CONNECTOR PLATING: MIL-G-45204

-40 to +70 DEG C

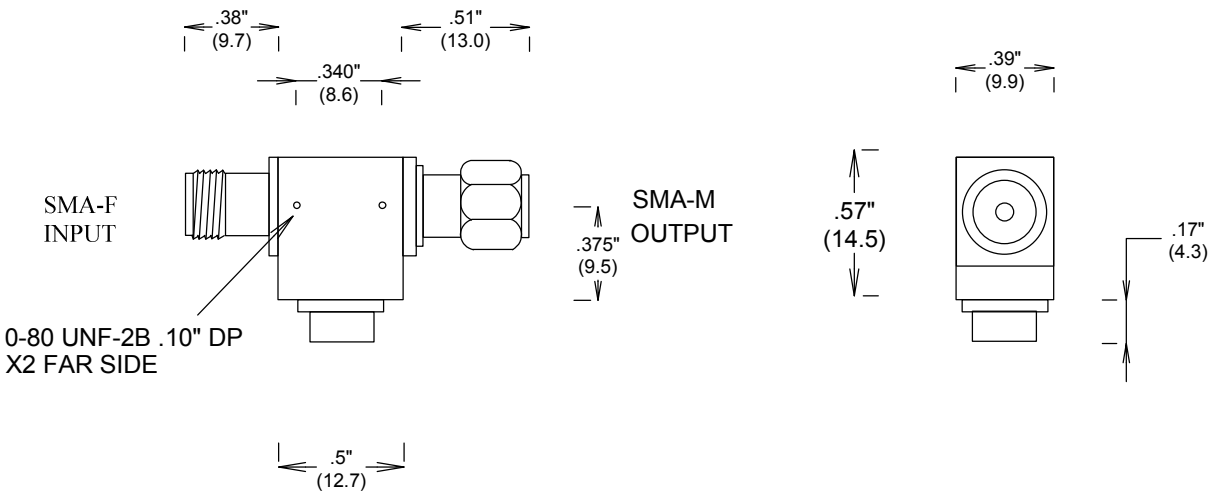

MEASUREMENTS BELOW ARE TYPICAL

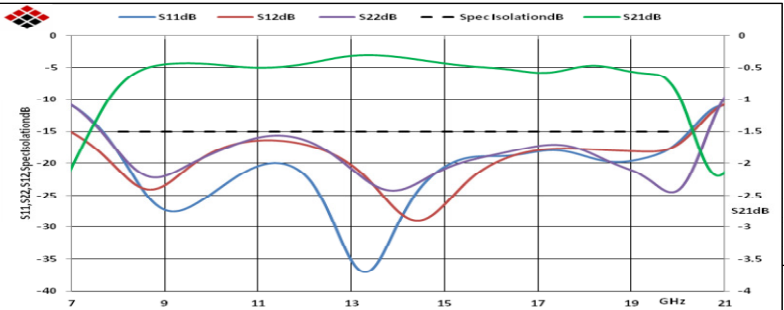

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ISOLATOR 8-20 GHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SFI0820

REV

A

SCALE

SHEET