


# WAVEGUIDE WR22 DIRECTIONAL COUPLER – RWGCP22SX

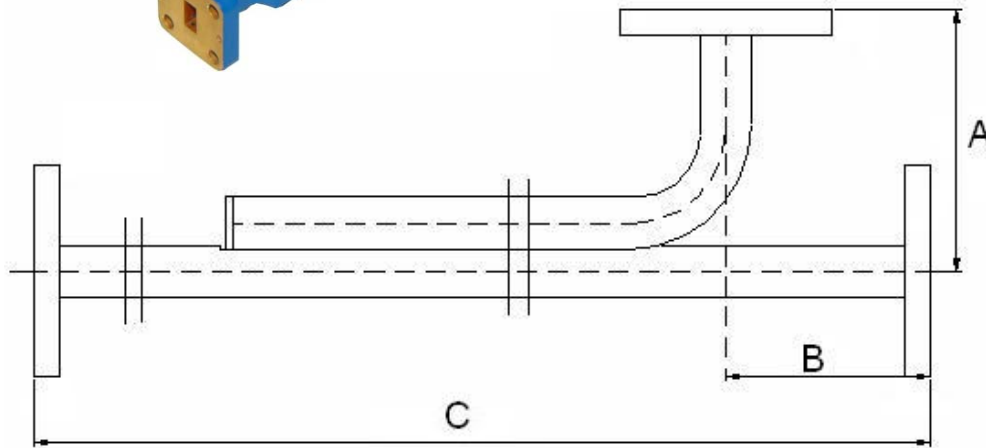

1.0 Mechanical Specifications	
1.1	Waveguide type Rectangular Waveguide WR22
1.2	Flange type CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes Through
1.4	Basis-material Cuprum
1.5	Internal Body Finish Silver Plated chromate or conversion
1.6	External Body Finish Body painted with gray/black epoxy enamel

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-60°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

Electrical Specifications							
Part Number	Frequency Range	VSWR	Coupling	Dimension (inch)			Direction
				A	B	C	
RWGCP22SA	32.9-51.0GHz	≤1.15	3 ± 1	1.30	0.71	7.87	A>25dB B>30dB C>35dB D>40dB
RWGCP22SB			6 ± 1.2	1.30	0.71	7.48	
RWGCP22SC			10 ± 1.5	1.30	0.71	7.08	
RWGCP22SD			20 ± 2	1.30	0.71	6.70	
RWGCP22SE			30 ± 3	1.30	0.71	6.30	

PAGE	OF	DATE	Jul 10 <sup>th</sup> 2007
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	0-4
		ASSEMBLY REVISION	VS2DS
		ASSEMBLY NAME	RFLVR011
		DRAWING NUMBER	D02-1
www.rflambda.com		RF-LAMBDA	
SIZE	LT	SHEETS	1 OF 1