



**Model 200T4G8,
M1, M3, M4, M5
200 Watts CW
4GHz–8GHz**


The Model 200T4G8 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for applications where instantaneous bandwidth and high gain are required. A reliable 250 watt TWT provides a conservative 200 watts minimum at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected output plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0 dBm input, VSWR protection, gain control, RF output sample port, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature.

Modular design of the power supply and RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction.

Housed in a stylish contemporary cabinet, this unit is designed for benchtop use but can be removed from cabinet for rack mounting. The Model 200T4G8 provides readily available RF power for a variety of applications in Test and Measurement, (including EMC RF susceptibility testing), Industrial and University Research and Development, and Service applications.

See Model Configuration for package alternatives.

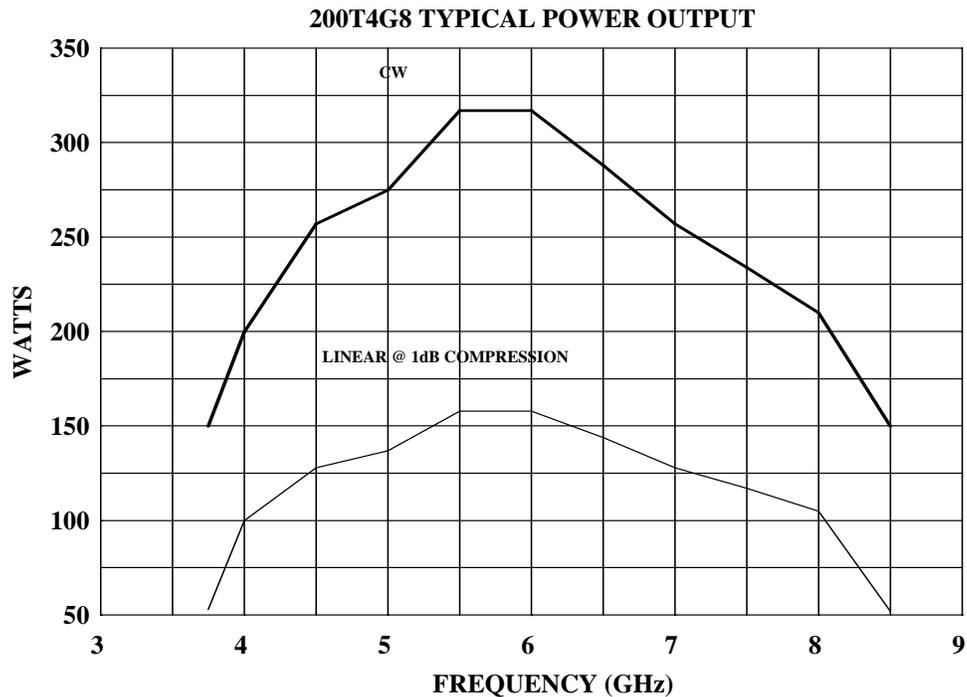

SPECIFICATIONS, MODEL 200T4G8

POWER (fundamental), CW, @ OUTPUT CONNECTOR

Nominal	262 watts
Minimum	200 watts
Linear @ 1 dB Compression	100 watts minimum

FLATNESS..... ±6 dB maximum at rated power

FREQUENCY RESPONSE 4-8 GHz instantaneously

INPUT FOR RATED OUTPUT 1.0 milliwatt maximum

GAIN (at maximum setting) 53 dB minimum

GAIN ADJUSTMENT (continuous range)..... 35 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 2.0:1 maximum

OUTPUT IMPEDANCE 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE..... Output power foldback protection at reflected power exceeding 40 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

MODULATION CAPABILITY..... Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal. AM peak envelope power limited to specified power.

NOISE POWER DENSITY Minus 64 dBm/Hz (maximum)
Minus 70 dBm/Hz (typical)

HARMONIC DISTORTION..... Minus 4 dBc maximum, Minus 7.0 dBc typical

PRIMARY POWER 190-260 VAC
50/60 Hz single phase
2.0 KVA maximum

CONNECTORS

RF input	Type N female on rear panel
RF output	Type N female on rear panel
RF output sample port	Type N female on rear panel
GPIB.....	IEEE (f) on rear panel
Interlock	DB-15 (f) on rear panel

COOLING..... Forced air (self contained fans), air entry and exit in rear.

MODEL CONFIGURATIONS

Model Number	Description	Weight	Size (W x H x D)
200T4G8	With removable enclosure	54 kg (120 lb)	50.3 x 29.7 x 68.6 cm 19.8 x 11.7 x 27 in
200T4G8M1	Shipped without an outer cabinet	41 kg (90 lb)	48.3 x 26.7 x 68.6 cm 19.0 x 10.5 x 27 in
200T4G8M3	Enclosure removed for rack mounting – slides and front handles installed	43 kg (95 lb)	48.3 x 26.7 x 68.6 cm 19.0 x 10.5 x 27 in
200T4G8M4	See separate specification sheet.		
200T4G8M5	Enclosure removed. Side carry handles and front pull handles installed	41 kg (90 lb)	48.3 x 26.7 x 68.6 cm 19.0 x 10.5 x 27 in