


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	

LABEL WITH MODEL NO.
AND SERIAL NO.
THIS SURFACE

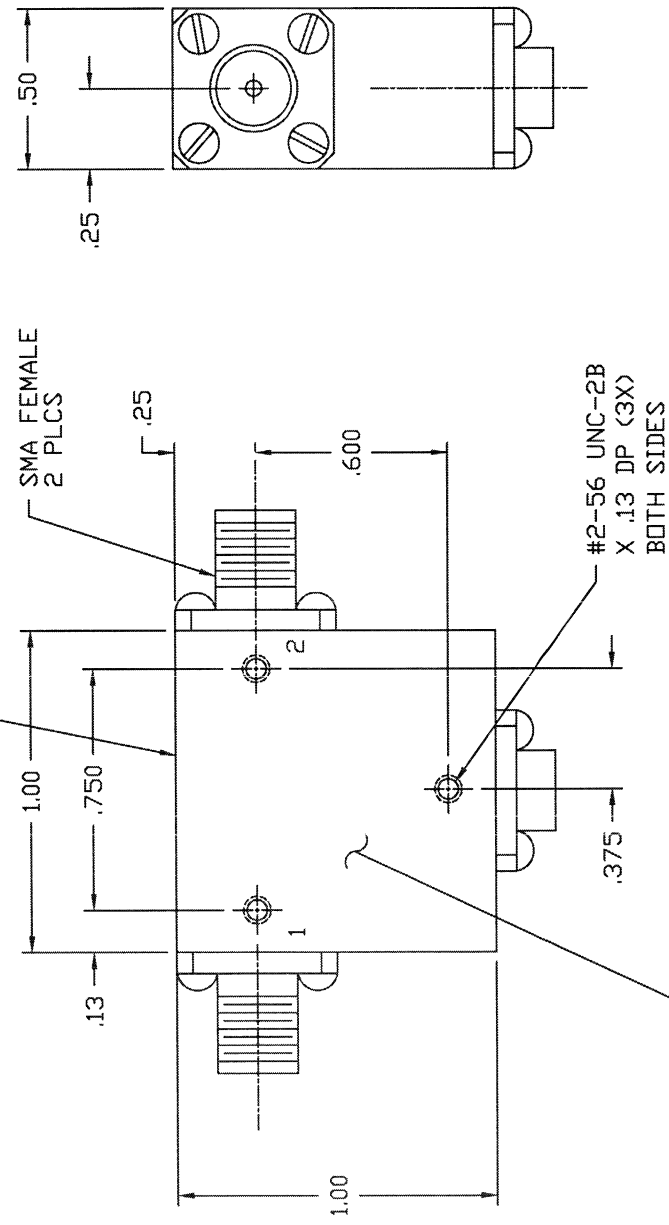

SPECIFICATIONS:

1. FREQUENCY ----- 3.7 TO 4.3 GHZ
2. ISOLATION ----- 26 dB MAX
3. INSERTION LOSS --- 0.11 dB MAX
4. VSWR ----- 1.10:1 MAX
5. TEMPERATURE:
OPERATING ----- -20° TO +65°C
STORAGE ----- -54 TO +100°C

QTY	FSCM REQD. NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES ± .XX± .02 ±		SIERRA MICROWAVE TECHNOLOGY		
MATERIAL .XXX± .010		APPROVALS DRAWN T TODRIGUEZ	DATE 4/9/87	OUTLINE FOR SMI3742
FINISH		CHECKED		
NEXT ASSY SMI3742		ISSUED T TODRIGUEZ	4/9/87	
USED ON		SIZE FSCM NO. DWG. NO.		REV.
APPLICATION		B 1CY63 205-0197-001		205-0197-001
		SCALE		SHEET