



# AMP1012 SOLID STATE HIGH POWER AMPLIFIER

## FEATURES

- Class AB linear GaN design
- Instantaneous wide bandwidth
- Suitable for all modulations standards
- Built-in protection circuits
- High reliability and ruggedness



Option 101



## ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	500 - 2500 MHz	
Power Output Psat	25 Watt Min	CW
Power Gain	44 dB Min	
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	34dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	>20 dBc Typ	At rated output
Non Harmonics Spurious	>60 dBc	
Operating Voltage	28 - 30 VDC	
Current Consumption	3 Amp Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty : 1$	
Turn On / Off Speed	5 $\mu\text{Sec}$ Max	

## ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation

## MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions	Option 000: 147 X 69 X 27 mm Option 101: 170 X 69 X 27 mm	Excluding Connectors
Weight	550 gr.	Max Weight
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

## D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	FWD	Option-101 - Analog Forward Power Indicator
2	REV	Option-103 - Analog Gain Control
3	CURRENT SENSOR	$I_D @ 100\text{mV}/100\text{mA}$ Typ
4	TEMP SENSOR	$V_T @ 10\text{mV}/^\circ\text{C} + 500\text{mV}$ Typ
5	SHUTDOWN	TTL
6, 7	VDD	28VDC
8, 9	GND	Ground

## OUTLINE DRAWING

# AMP1012 SOLID STATE HIGH POWER AMPLIFIER

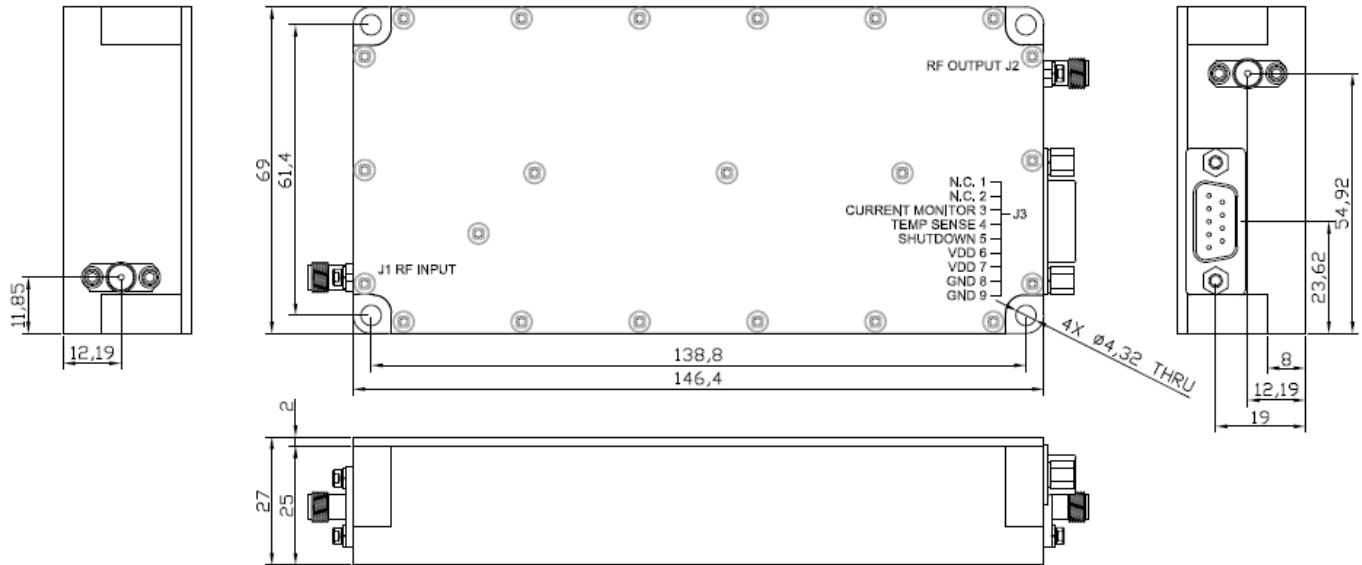

## SHOWN WITH OPTION 101

