


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

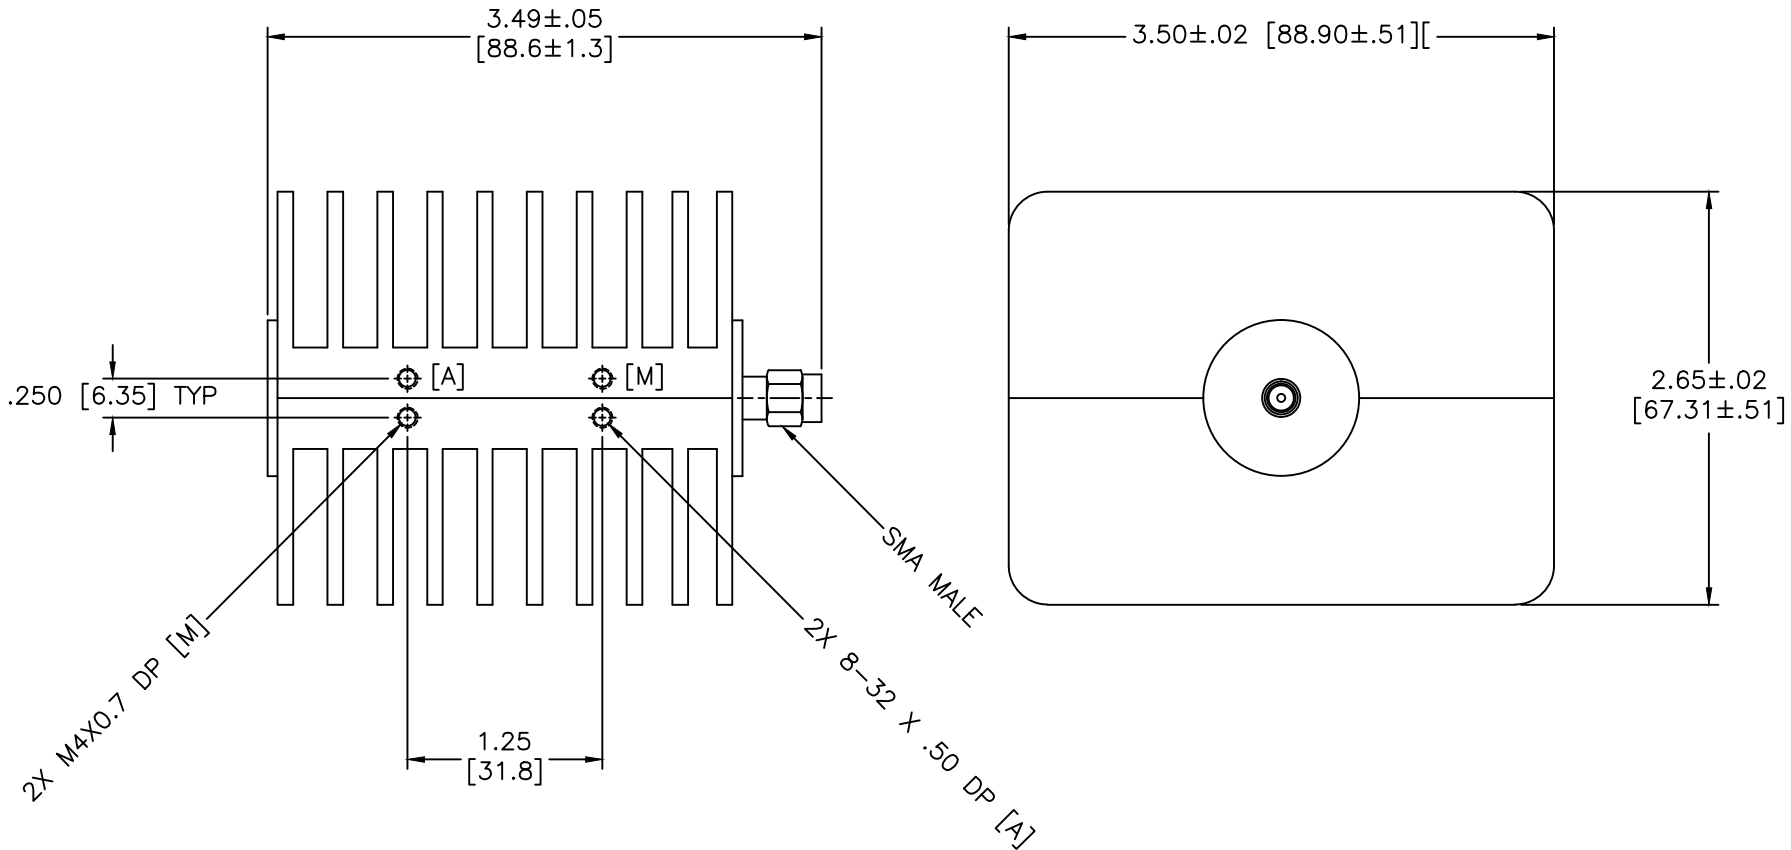

SPECIFICATIONS

FREQUENCY RANGE DC-6 GHz
 VSWR Max.
 DC - 6.0 GHz 1.25:1
 IMPEDANCE 50 Ohms
 INPUT POWER 50 Watts Avg @+25°C
 Derated Linearly to 10 Watts @ +125°C
 PEAK POWER 500 Watts Max.
 OPERATING TEMP. RANGE -65°C to +125°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ±.009 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL TERMINATION	
DRAWN: Paiboon Luethamhan		PART NO. TSM-17	
DATE: 02-22-2006	DATE: 02-22-2006	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 02-22-2006	REV: N/A	DWG NO. 82499
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	