

N-M CRIMP RG9, RG214, RG393

SC9104

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-11 GHZ
 VSWR 1.5:1 MAX
 IMPEDANCE: 50 OHMS

MECHANICAL:




MATERIAL BODY: NICKLE PLATED BRASS
 CENTER CONTACT: BRASS
 CONTACT PLATING: Au 30μ"
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348B

OP. TEMP RANGE: -65°C- +165°C

ROHS COMPLIANT

ASSEMBLY INSTRUCTIONS:

TRIM CABLE AS SHOWN;
 SOLDER CONTACT ONTO CENTER CONDUCTOR,
 CHECK THAT BACK OF CONTACT IS FLUSH WITH DIELECTRIC;
 FLARE BRAID SLIGHTLY BY ROTATING;
 INSERT CABLE/CONTACT INTO REAR OF BODY;
 ALL BRAID WIRES OUTSIDE OF CRIMP TAIL;
 PUSH CABLE IN UNTIL CABLE DIELECTRIC BOTTOMS IN CONN;
 TRIM EXCESS BRAID WIRES;
 SLIDE SLEEVE FORWARD, CRIMP

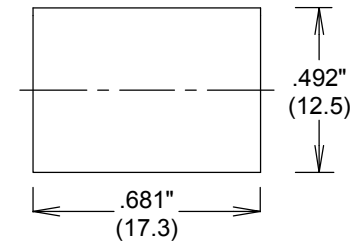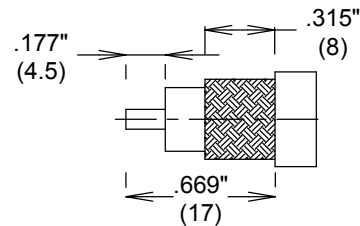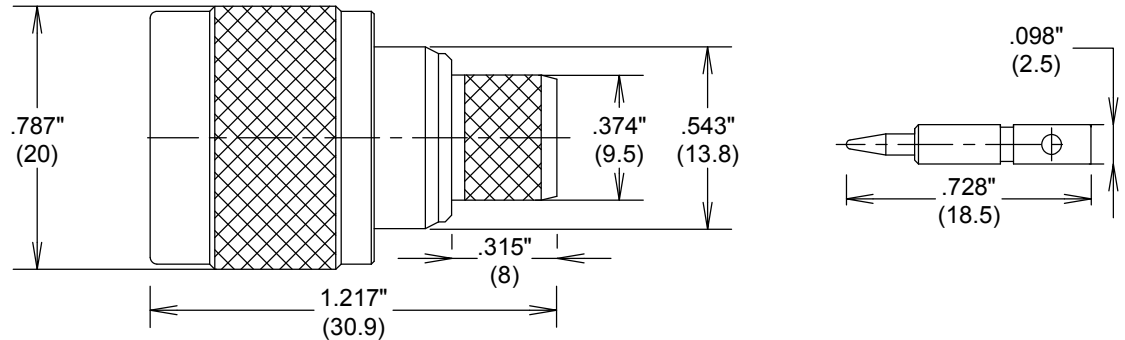

STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

N-M CRIMP RG9, RG214, RG393

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC9104	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(mm) Typical