



2 CHANNELS CAVITY MULTIPLEXER

Channel1: 977 -979 MHz
Channel2 : 1015-1105 MHz




Electrical Specification:

Band width:

Channel1: 977 -979 MHz
Channel2 : 1015-1105 MHz
Insertion Loss: 0.5dB max
Pass band Ripple: 0.2dB max
Power Handle: 130W
Isolation between port: >50 dB @1090 MHz
 >30 dB@1030 MHz
 >20 dB@978 MHz

Return loss: 50dB
VSWR: <1.3
Delay Variation: ≤10ns
Propagation delay: ≤30ns

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -40~+55C
- Operating Humidity: 0~90% relative

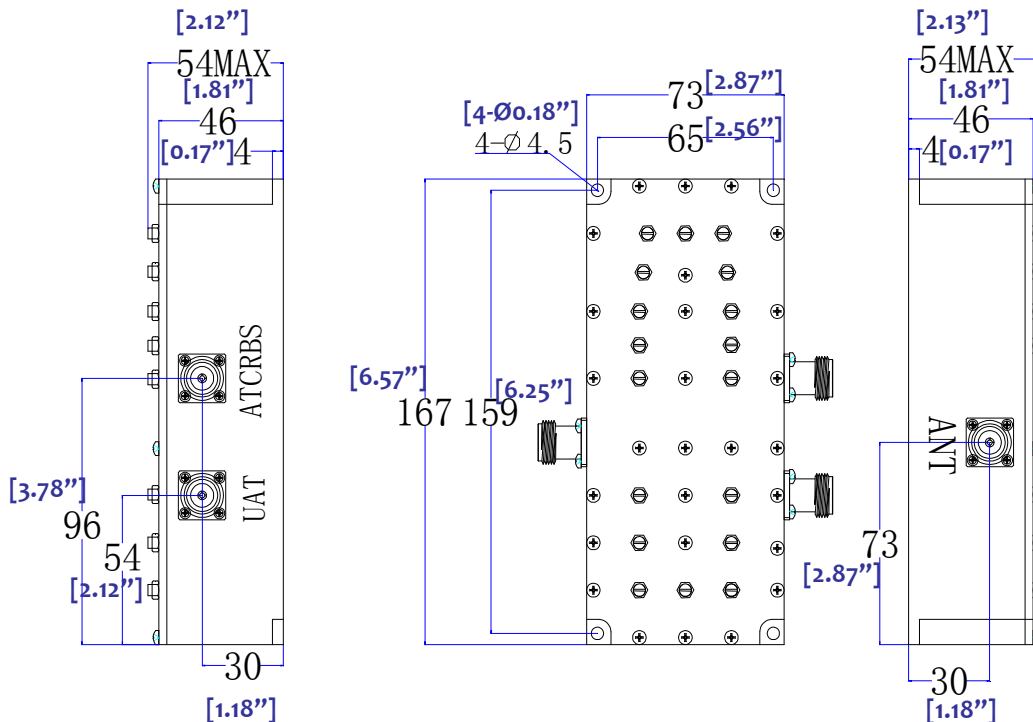

130W HIGH POWER 2 CHANNELS CAVITY MULTIPLEXER