

Features

- Ultra low noise
- Linear tuning characteristics
- Low pushing / Low pulling

Applications


- SATCOM
- Receiver
- Test Equipment
- Radar
- Point-to-Point
- Radio
- MMDS
- WiMax

Electrical Characteristics



Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	2390		2680
Output Power	dBm		7.0	
Output Impedance	Ω		50	
Phase Noise	@10kHz offset	dBc/Hz	-105	
	@100kHz offset	dBc/Hz	-125	
Tuning Voltage (Vt)	Vdc	+1		+10
Tuning Voltage Sensitivity (Kv)	MHz/V		36	
2nd Harmonic Suppression	dBc		-20	
Power Supply (Vcc)	Voltage	Vdc	6	
	Current	mA	28	
Pushing Figure	MHz/V		2	
Pulling Figure	MHz		3	
Input Capacitance	pF		0	
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

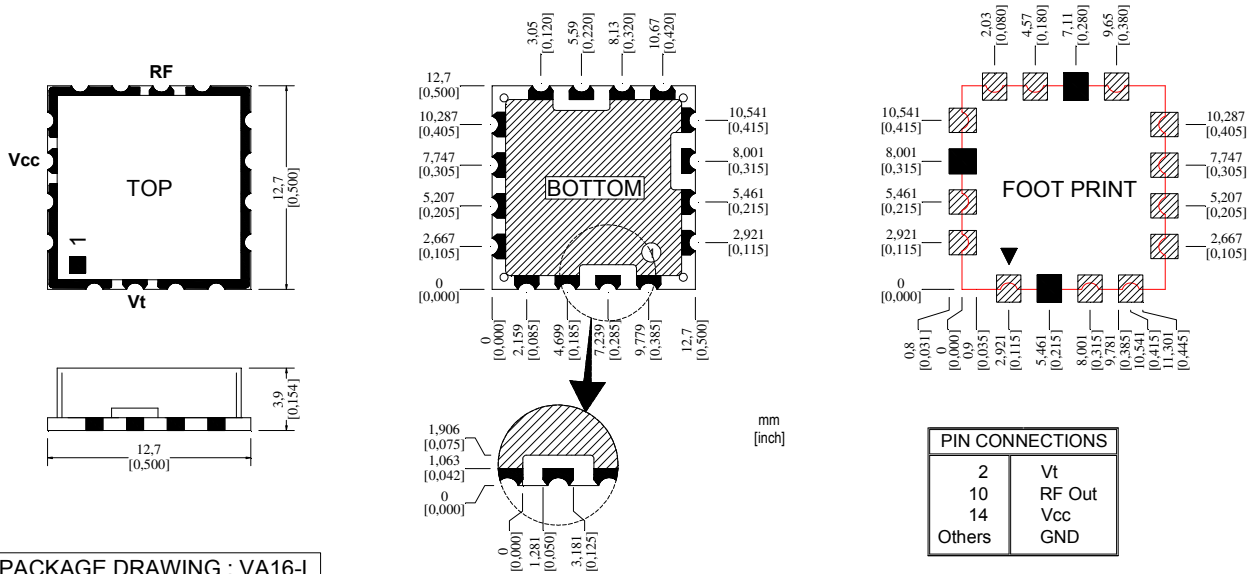

PACKAGE DRAWING : VA16-L