




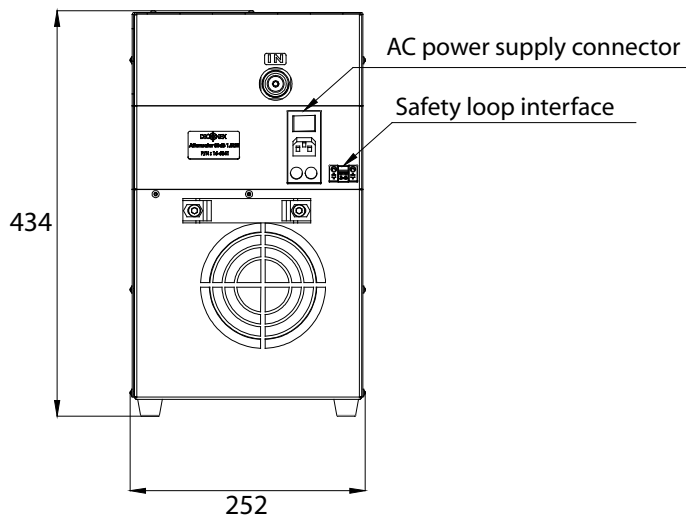

Standards  
NF C 96-315  
MIL-DTL-3933

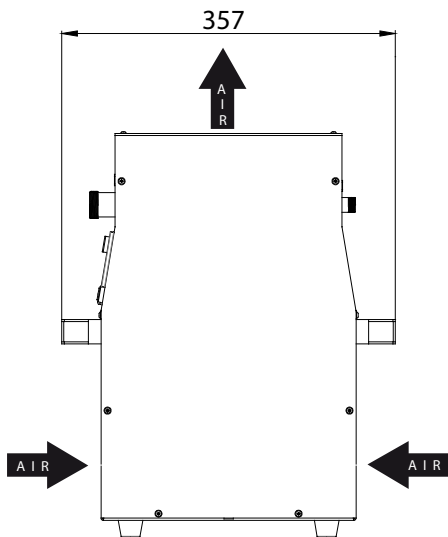

Impedance 50 Ω ± 5%  
 Frequency DC - 1 GHz  
 Max VSWR ≤ 1.10 at 860 MHz, ≤ 1.25 at 1GHz  
 Temperature range -25 to +55°C  
 Average power @ 25°C 1.5 kW  
 Weight 17 kg



Dimensions in mm

Attenuation (dB)	P/N	Connector	AC power supply	Accuracy ±Δα (dB)
20	16-6842	7-16f / Nf	220 V - 50/60 Hz	0.5
30	16-6841	7-16f / Nf	220 V - 50/60 Hz	0.5
40	16-6843	7-16f / Nf	220 V - 50/60 Hz	1

Others attenuations on request