


Features

- 3 wire serial integer PLL
- Small Size 0.55"x0.57"x0.13"
- Low phase noise
- Programming : LMX2326(NSC)

Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

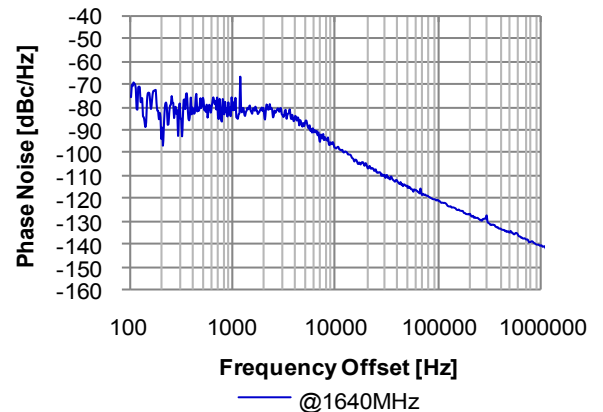


Electrical Characteristics



Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1620		1660
Step Size	kHz		480	
Settling Time	msec		10	30
Output Power	dBm	0.0	+2.0	+4.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-80	-70
	@10kHz offset	dBc/Hz	-98	-93
	@100kHz offset	dBc/Hz	-121	-116
	@1MHz offset	dBc/Hz	-140	-135
2nd Harmonic Suppression	dBc		-23	-15
Sideband Spurious Suppression	dBc			-85
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	22	30
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

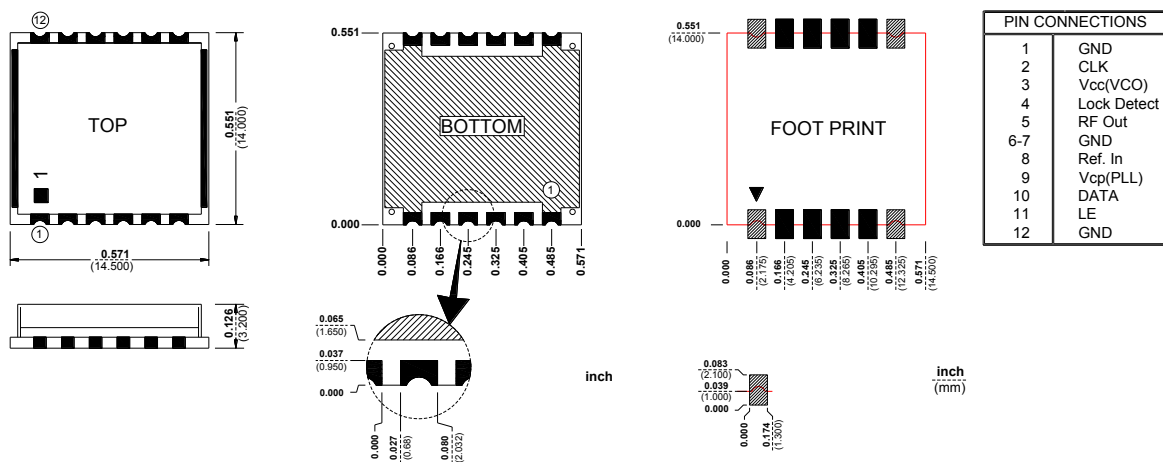

PACKAGE DRAWING : PM12-L

