

# ADAPTER, TYPE N TEE

SM4575

## SPECIFICATIONS



ELECTRICAL  
50 OHMS  
VSWR 2.1:1 MAX  
FREQUENCY: DC-4 GHZ

MECHANICAL

ENVIRONMENTAL  
-65 DEG C TO +165 DEG C  
INTERFACE: MIL-STD-348

MATERIALS  
BODY: ALBALOY PLATED BRASS  
CENTER CONTACT: BeCu & BRASS  
CONTACT PLATING: Au PER MIL-G-45204  
INSULATION: TEFLON  
DURABILITY: 500 CYCLES

ROHS COMPLIANT

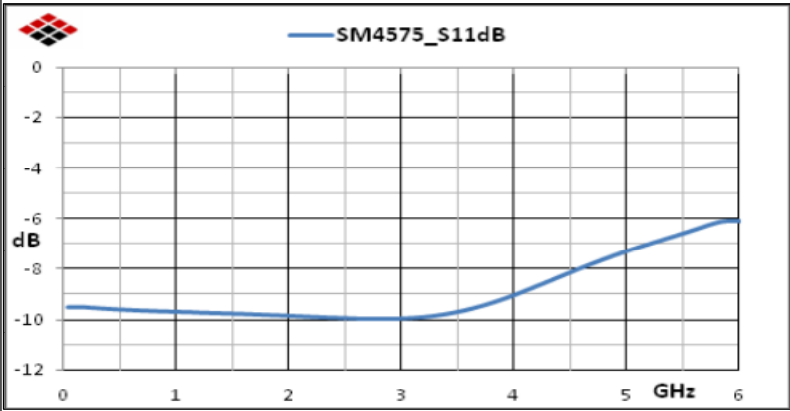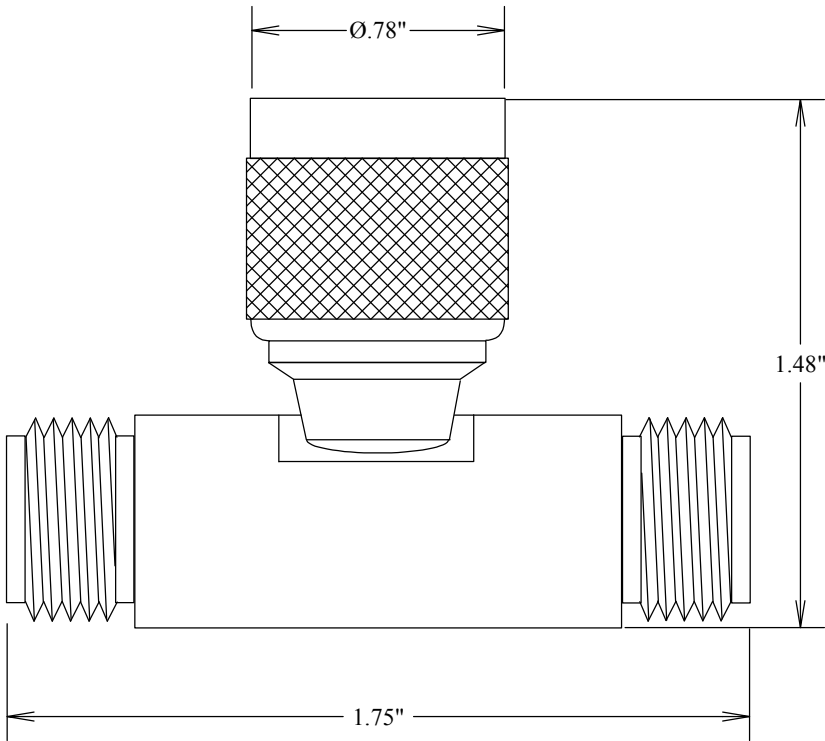

ALL DIMENSIONS IN inches(MM) Typical

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 [WWW.FAIRVIEWMICROWAVE.COM](http://WWW.FAIRVIEWMICROWAVE.COM)

TITLE

**ADAPTER, TYPE N TEE**

SIZE

**A**

CAGE CODE

**3FKR5**

DWG NO

**SM4575**

REV

**A**

SCALE

SHEET