
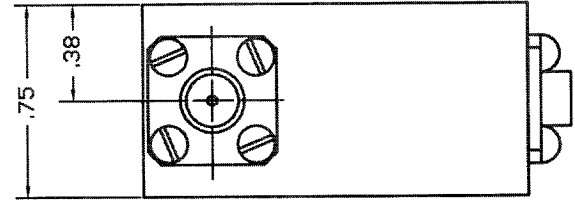


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	
A	REV PER ECN 4498	

SMA FEMALE  
2 PLCS

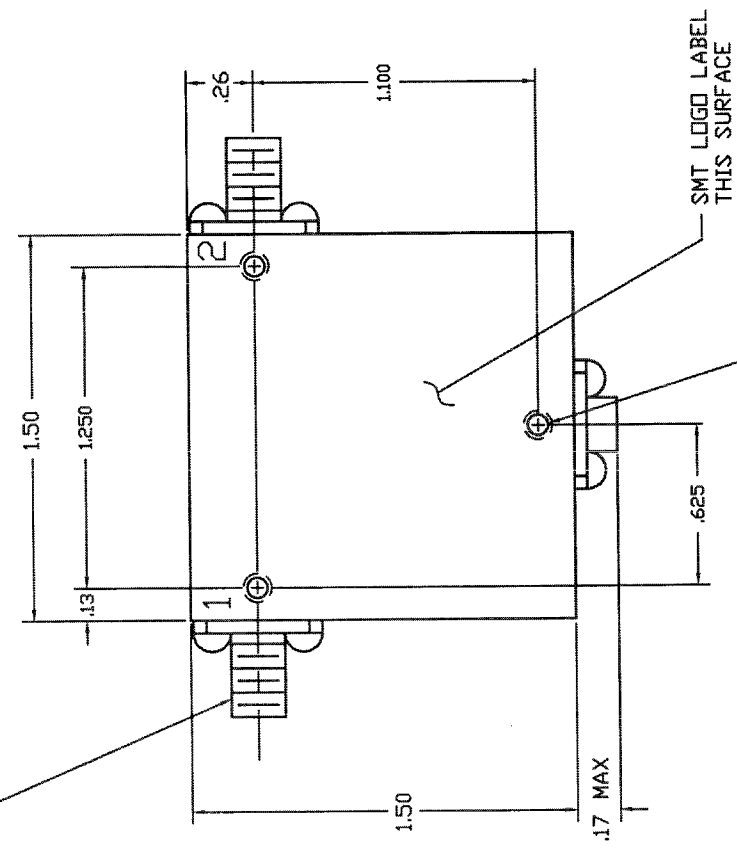

SPECIFICATIONS

1. FREQUENCY RANGE\_\_\_\_\_ 600 TO 700 MHZ
2. VSWR\_\_\_\_\_ 1.25:1 MAX
3. ISOLATION\_\_\_\_\_ 20 dB MIN
4. INSERTION LOSS\_\_\_\_\_ 0.4 dB MAX
5. TEMPERATURE  
 OPERATING\_\_\_\_\_ -20° TO +65°C  
 STORAGE\_\_\_\_\_ -20° TO +65°C

QTY	FSCM RECD NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES XX± OR ± XXX± .010		APPROVALS		DATE
MATERIAL		DRAWN J. DARJES		
FINISH		CHECKED		
		ISSUED		
204-0180-001		SMT10607		
NEXT ASSY		USED IN		
APPLICATION				
		SIERRA MICROWAVE TECHNOLOGY		
		OUTLINE FOR SMI0607		
SIZE	FSCM NO.	DWG. NO.	REV.	
B	1CY63	205-1132-001		
				SCALE
				SHEET