

MCX-PLUG RG174 RG316 RIGHT ANGLE

SC9465

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ
VSWR 1.25:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C to +125C

MECHANICAL:

MATERIAL BODY: BRASS AU PLATING
CENTER CONTACT: BRASS
CONTACT PLATING: Au MIL-G-45204
CAPTIVATED CONTACT
INSULATOR: TEFLON
ROHS COMPLIANT

ASSEMBLY

TRIM CABLE AS SHOWN,
SLIDE CRIMP SLEEVE ON CABLE,
PUSH CABLE INTO CONTACT SLOT,
SLIDE SLEEVE FORWARD & CRIMP,
SOLDER CENTER CONDUCTOR,
APPLY CAP

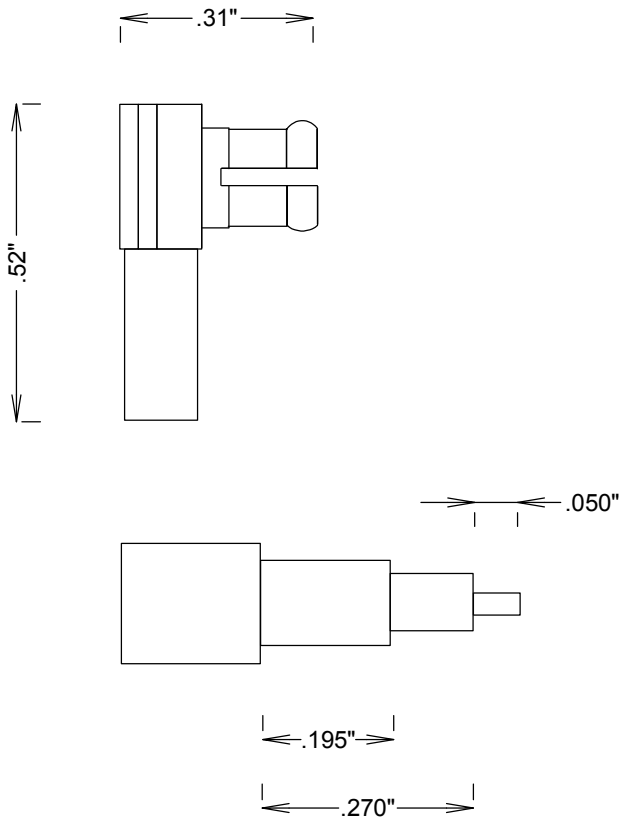

STRIPPING DIMENSIONS

					FAIRVIEW MICROWAVE INC.		
					ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		
					TITLE		
					MCX-PLUG RG174 RG316 RIGHT ANGLE		
					SIZE	CAGE CODE	DWG NO
					A	3FKR5	SC9465
					SCALE		REV
							SHEET