


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

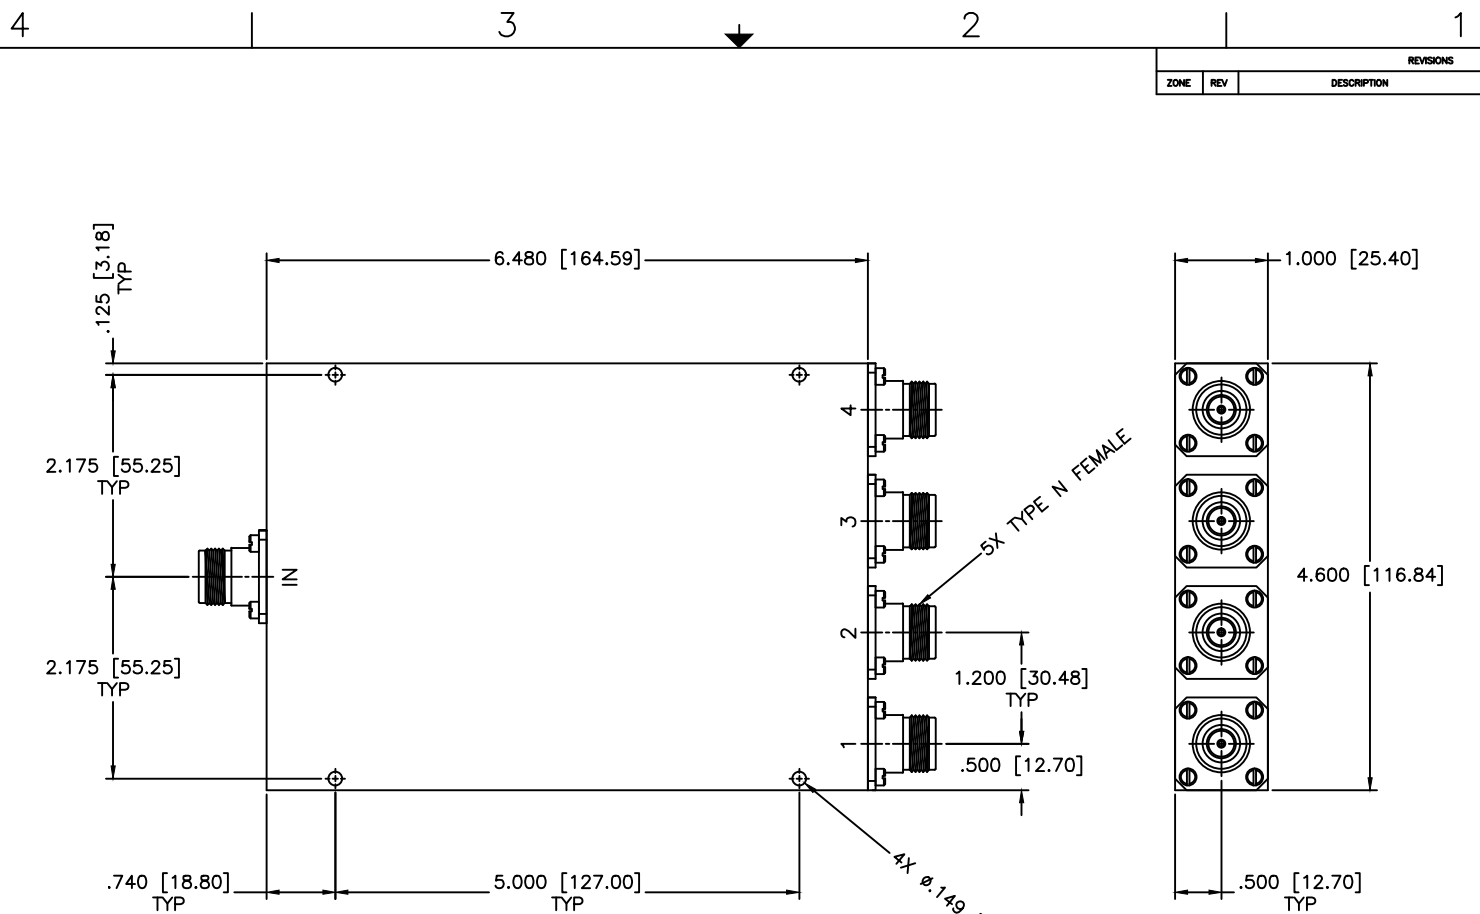

**SPECIFICATIONS**

Frequency Range: 1000–2000 MHz  
 Insertion Loss: 1.0dB Max.  
 Isolation: 17dB Min.  
 VSWR: 1.50:1 Max.  
 Power: 150 W CW  
 Amplitude Balance: ±0.3dB Max.  
 Phase Balance: ±5 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.015 ±0.007 ANGLE: ±1/2°			DRAWING TITLE: <b>4-WAY POWER DIVIDER/COMBINER</b>		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-07-2011		PART NO. <b>PM4-16-150/NF</b>	
APPROVED: T. Nguyen		DATE: 06-07-2011		CAGE CODE: OD2L5	SIZE: C
THIRD ANGLE PROJECTION		REV: N/A		DWG. NO. 85710	
				DO NOT SCALE THE DRAWING	

D  
C  
B  
A

D  
C  
B  
A

4 3 2 1