

N-F HERMETIC BULKHEAD

SC9277

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-12 GHZ
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BRASS, Ni PLATING
CENTER CONTACT: BeCu
CONTACT PLATING: Si QQ-S-365
CAPTURED CONTACT
INSULATOR: TEFLON
INTERFACE: MIL-STD-883A
OP. TEMP RANGE: -55°C to +155°C
ROHS COMPLIANT

HERMETIC

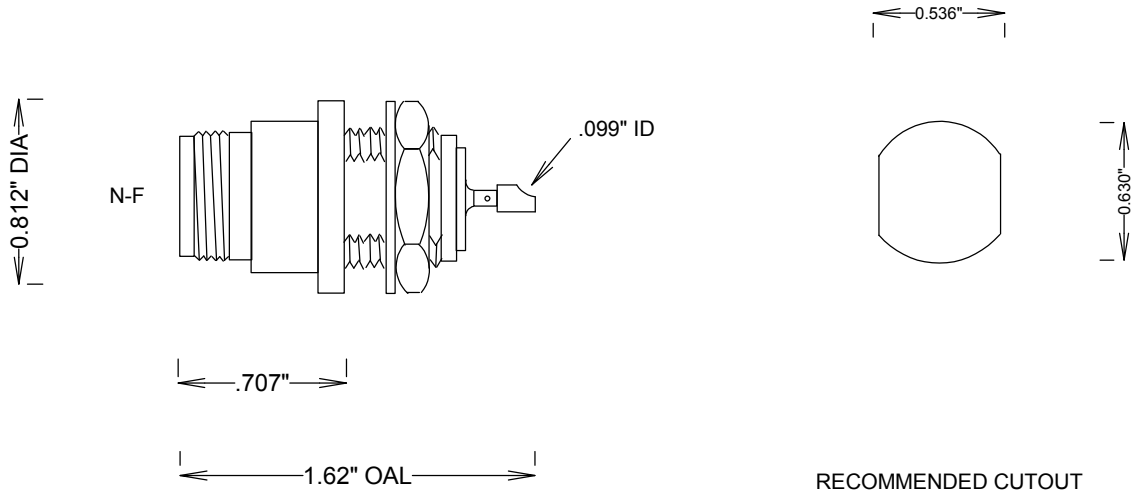

RECOMMENDED CUTOUT

0.1" MAX PANEL

		FAIRVIEW MICROWAVE INC.		
		ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		
		TITLE		
		N-F HERMETIC BULKHEAD		
SIZE		CAGE CODE	DWG NO	REV
A		3FKR5	SC9277	--
SCALE				SHEET