

Product Features

- 50MHz ~ 1GHz
- GaAs E-pHEMT
- 22dB Gain
- 2.0 dB Noise Figure
- +18.0 dBm P1dB
- SOT-89 SMT Package
- Single +5V Supply
- Pb Free / RoHS Standard

Applications

- CATV Amplifier



Package Type : SOT-89

Description

AE308 is used from 50MHz to 1GHz frequencies and GaAs E-pHEMT in a low cost SOT-89 package. The package is SOT-89, which is pin-to-pin compatible with industry standard.

Electrical Specifications @ $V_{dc} = 5V$; $T_{case} = 25^{\circ}C$; $Z_S = Z_L = 75\Omega$

PARAMETER		UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency(f_o)		MHz	50MHz	-	1GHz	-
Gain (S_{21})		dB	-	22	-	50MHz ~1GHz
Input Return Loss(S_{11})		dB	-	-15	-	-
Output Return Loss(S_{22})		dB	-	-15	-	-
Output IP3(OIP3)		dBm	27	29	-	-
1dB Compression Point(P_1 dB)		dBm	17	19	-	50 ~ 500MHz
		dBm	15	17	-	500MHz ~ 1GHz
Output IP2(OIP2)		dBc	37	45	54	50MHz ~1GHz
Noise Figure(NF)		dB	-	1.5	-	50 ~ 800MHZ
		dB	-	2	-	800MHz ~ 1GHz
CSO	50 ~ 870MHz	dBc	-	-58	-	135 channels,+16dBmV/ch,Single
CTB		dBc	-	-64	-	135 channels,+16dBmV/ch,Single
XMD		dBc	-	-67	-	135 channels,+16dBmV/ch,Single
Current		mA	40	55	70	-

Note

1. Test conditions unless otherwise noted. $T=25^{\circ}C$, $V_{dc}=5.0V$, 75Ω system
2. OIP3 measured with 2 tones at an output power of 5dBm/tone separated by 1MHz


Absolute Maximum Ratings

PARAMETER	Minimum Rating	Maximum Rating
Operating Case Temperature ($^{\circ}C$)	-40	85
Storage Temperature ($^{\circ}C$)	-50	125
Drain-Source Voltage (V)	-	7

Single-Ended CATV 75ohm Evaluation Circuit : (50MHz ~1GHz)


Typical RF Performance @ 25 °C

PARAMETER	UNIT	TYPICAL		
Operating Frequency(f_o)	MHz	50	450	1000
Gain (S_{21})	dB	22	22	22
Input Return Loss(S_{11})	dB	-15	-15	-15
Output Return Loss(S_{22})	dB	-15	-15	-15
Output IP3(OIP3)	dBm	29	30	28
1dB Compression Point(P_1 dB)	dBm	19	19	17
Output IP2(OIP2)	dBc	45	42	54
Noise Figure(NF)	dB	1.3	1.5	2
CSO ⁽¹⁾	dBc	-58		
CTB ⁽¹⁾	dBc	-64		
XMD ⁽¹⁾	dBc	-67		
Supply Voltage	V	5		
Current	mA	40~70		

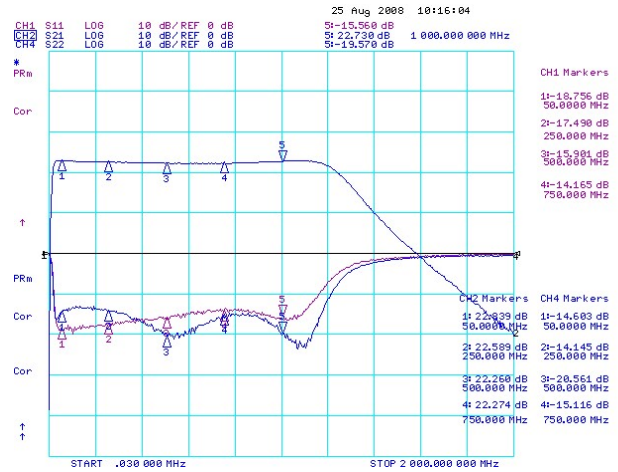


(1) 135channels, 16dBmV/ch, Single

Application Circuit @ 50MHz~1GHz

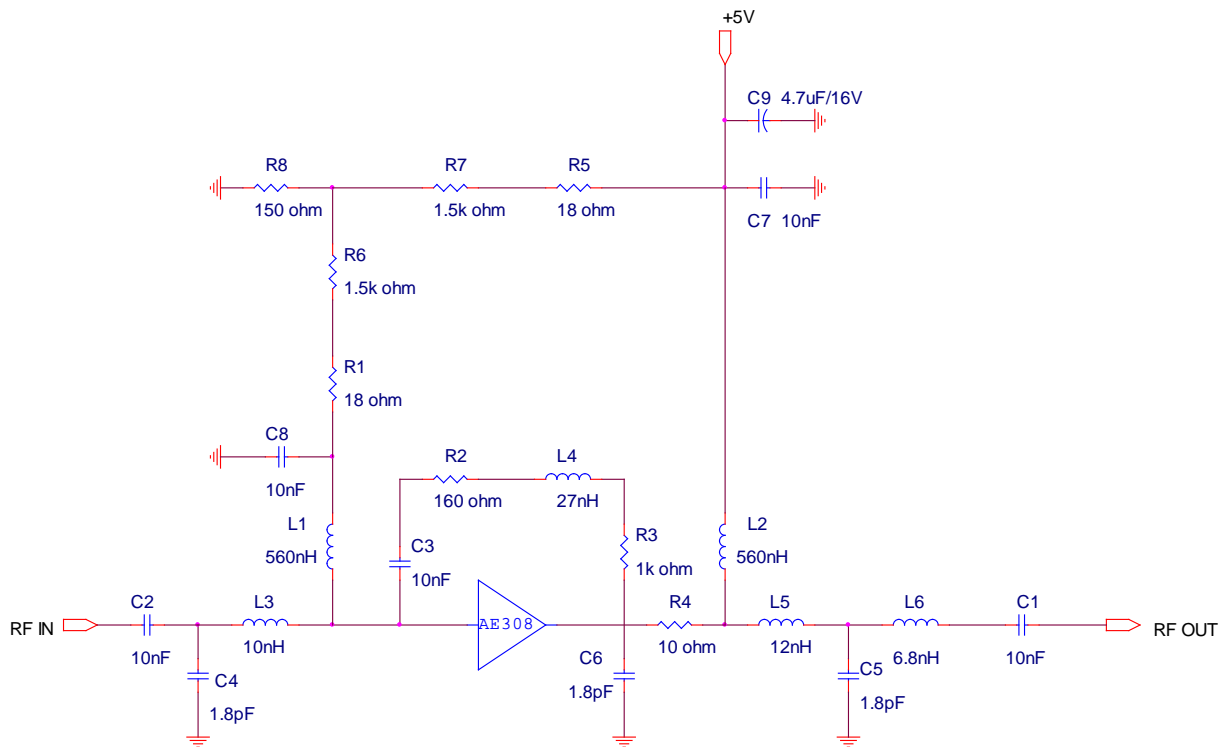


Package Dimensions (Type: SOT-89)

* Unit: mm[inch] | Tolerance ±0.2[.008]

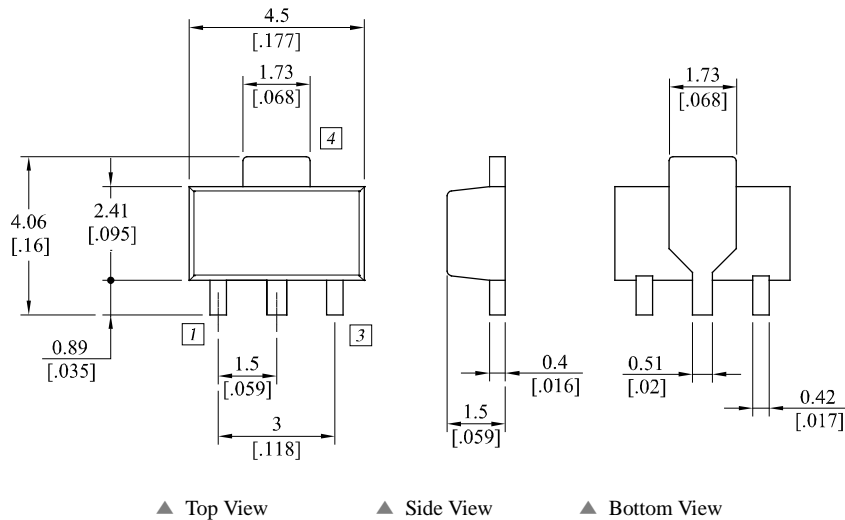


Pin Description			
Pin No	Function	Pin No	Function
1	Input	4	GND
2	GND		-
3	Output / Bias		-

Recommended Pattern

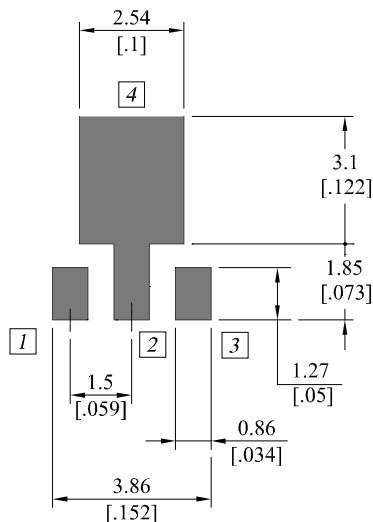

Recommended Mounting Configuration

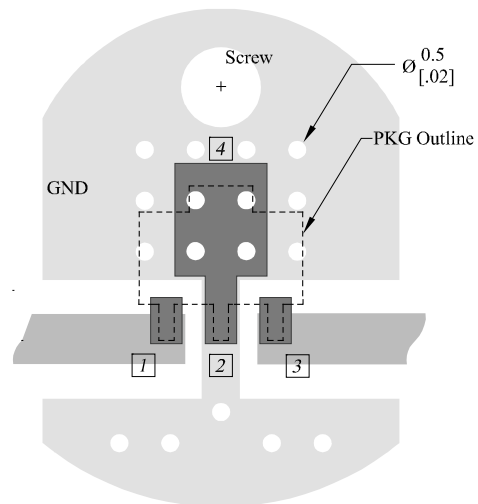

* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
AE308	2012.10.17	1.4	New datasheet format	-
AE308	2012.2.18	1.3	-	-

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.