

KR 2465 30 MHz Video Filter

General Description

KR 2465 is a 30 MHz video lowpass filter with group delay equalization. The filter is designed to be used as an antialiasing filter in HD 2x oversampling applications. Other options including $\sin(x)/x$ compensation are available. Please consult the factory.


Features

- 30 MHz passband frequency
- <0.1 dB & < 1 nsec passband ripple
- >50 dB at 118.5 MHz
- Group delay equalization
- 75 Ω Source and Load

Typical Performance


Amplitude & Group Delay

(0.1 dB/div & 1 nsec/div) 0.1 MHz to 30 MHz

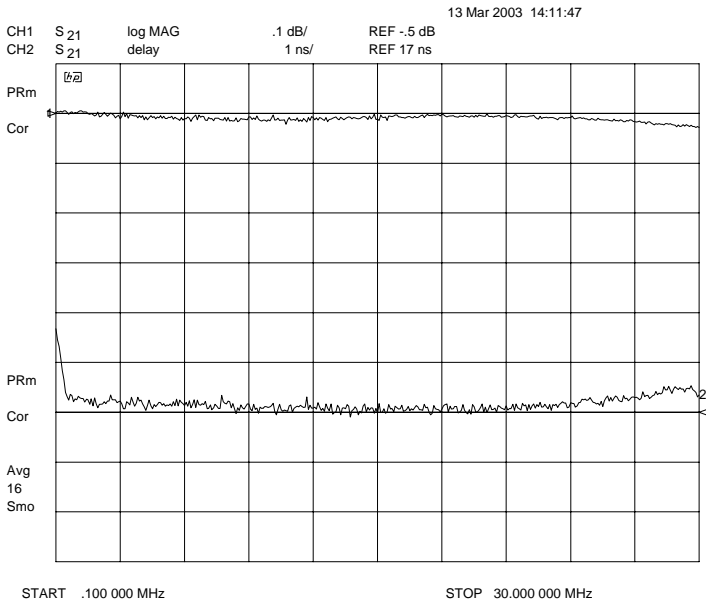

Overall Response

(5 dB/div) 1 MHz to 500 MHz

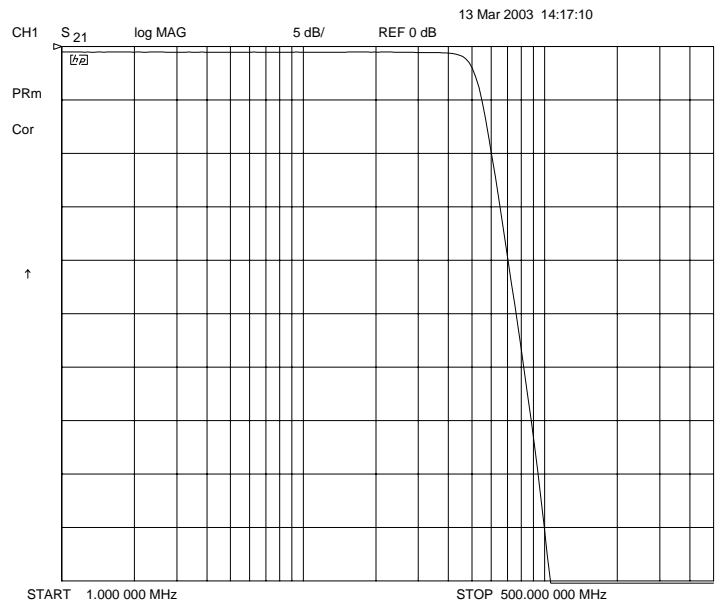

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Series 2465 Video Filter

Specifications

| Parameter | Specification | Typical |
|--------------------------|---------------|-----------|
| Filter type | Lowpass | |
| End of passband | 30 MHz | |
| Passband ripple | < 0.1 dB p-p | 0.05 dB |
| Start of stopband -50 dB | 118.5 MHz | |
| Group delay ripple | < 1 nsec p-p | 0.50 nsec |
| Group delay control to | 30 MHz | |
| Impedance | 75 Ω | |

Physical Dimensions

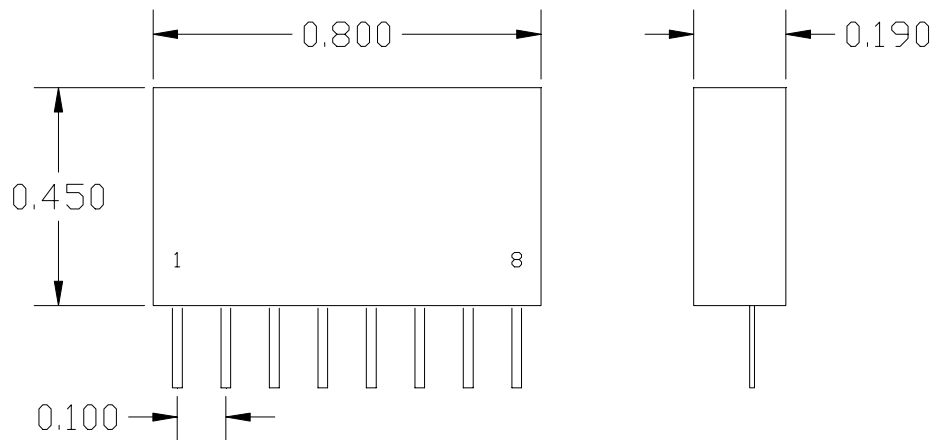

Pin 1 is Input
 Pin 8 is Output
 Pins 2 thru 7 are Ground

Pin dimensions .010" x .020"

Tolerance ± 0.010
 All Dimensions Shown in inches

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982