


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	

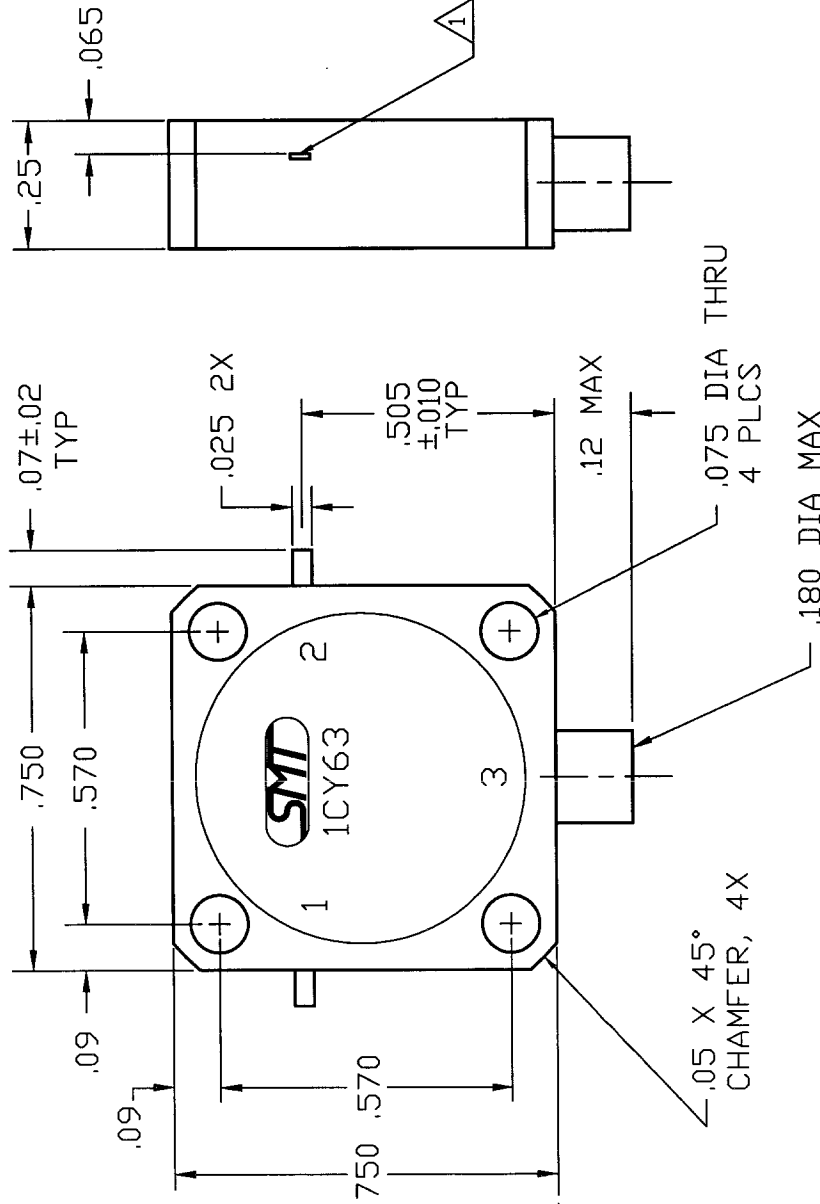

SPECIFICATIONS

1. FREQUENCY RANGE-----2.0 TO 2.5 GHz
2. VSWR-----1.30:1 MAX
3. ISOLATION-----18 dB MIN
4. INSERTION LOSS-----0.5 dB MAX
5. TEMPERATURE  
 OPERATING----- -20° TO +65°C  
 STORAGE----- -54° TO +100°C
6. LOAD RATING----- 4 WATTS MIN.  
 @ 85°C HEATSINK TEMPERATURE

2. CASE: STAINLESS STEEL NICKEL PLATED.

1. TABS ARE .005±.001 THK. Be Cu, GOLD PLATED.

NOTES:

QTY	FSCM RECD. NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
			PARTS LIST	
			SMD SIERRA MICROWAVE TECHNOLOGY	
			OUTLINE FOR SDI2025A	
			SIZE	DWG. NO.
			B	1CY63 205-1944-001
			SCALE	SHEET

FRACTIONS DECIMALS ANGLES	APPROVALS	DATE
± .XX± .01 ± .XXX± .005	DRAWN	
MATERIAL	CHECKED	
FINISH	ISSUED	

203-0116-001	SDI2025A	USED IN	APPLICATION