

2.92mm/F - 2.92mm/F ADAPTER 40GHZ

SM3232

SPECIFICATIONS

ELECTRICAL

50 OHMS

VSWR 1.10:1 MAX @ 27GHZ

VSWR 1.15:1 MAX @ 40 GHZ

FREQUENCY: 0-40 GHZ

MODE FREE TO 46 GHZ

MECHANICAL

500 CYCLES MIN

4.0 INCH-OUNCES MIN CONTACT TORQUE

8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL

-55 TO +100 °C

CORROSION: MIL-STD 202

VIBRATION: MIL-STD 202



MATERIALS

BODY: PASSIVATED STAINLESS STEEL

CENTER CONTACTS: BeCu Au PLATED

ROHS COMPLIANT

MEASUREMENTS BELOW ARE TYPICAL

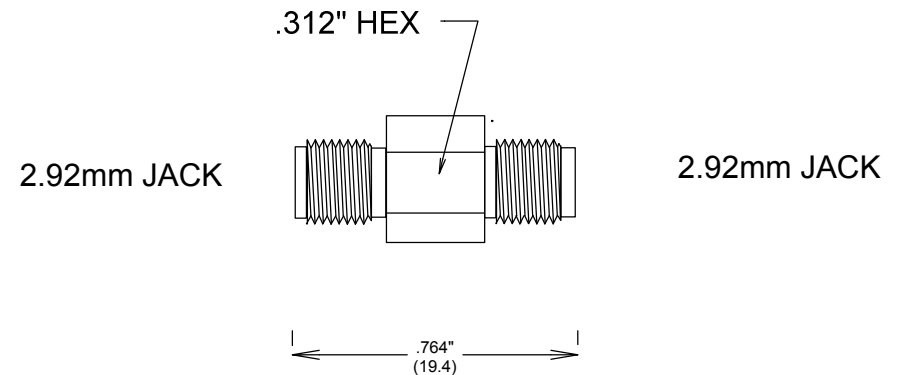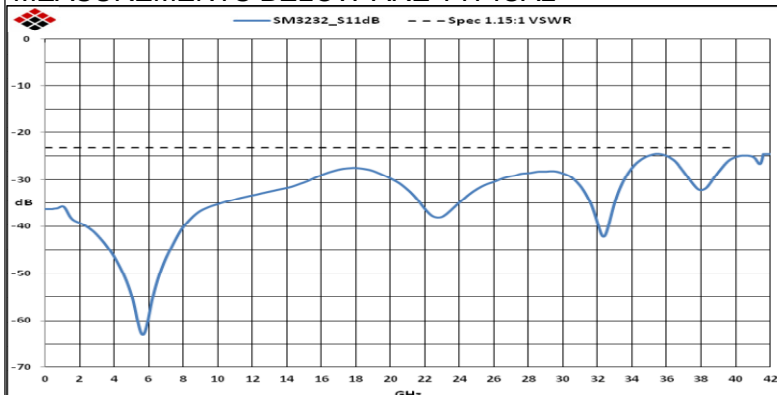

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

2.92mm/F - 2.92mm/F ADAPTER 40GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM3232	A
SCALE	SHEET		