


- 1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-11GHz
 1.2 VOLTAGE RATING: 500V RMS (sea level)
 1.3 NOMINAL IMPEDANCE: 50 OHMS
 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
 1.5 TEMPERATURE RANGE: -65°C TO +165°C
 2.0 MATERIALS
 2.1 DIELECTRIC: TEFLON, ASTM-D-1710

- 2.2 CENTER CONTACT: BERYLLIUM COPPER ASTM-B-196
 2.3 LOCKING RING: PHOSPHOR BRONZE, ASTM-B-159, ALLOY 510
 2.4 ALL OTHER METAL PARTS: BRASS PER ASTM-B-16
 2.5 GASKET: SILICON RUBBER, ZZ-R-765, GR. 50, RED
 3.0 FINISHES: SEE TABLE
 4.0 MECHANICAL
 4.1 INTERFACES: IN ACCORDANCE WITH MIL-STD-348

DWG NO. OL-0910-27-1		REV. B
PART NUMBER	BODY	CONTACT
0910-27-AS	ALBALOY	SILVER
0910-27-NG	NICKEL	GOLD
0910-27	NICKEL	GOLD
OBSOLETE 2-PCS BODY CONSTRUCTION		

PLATING PER SAN-TRON SPEC. 7.3.1-8

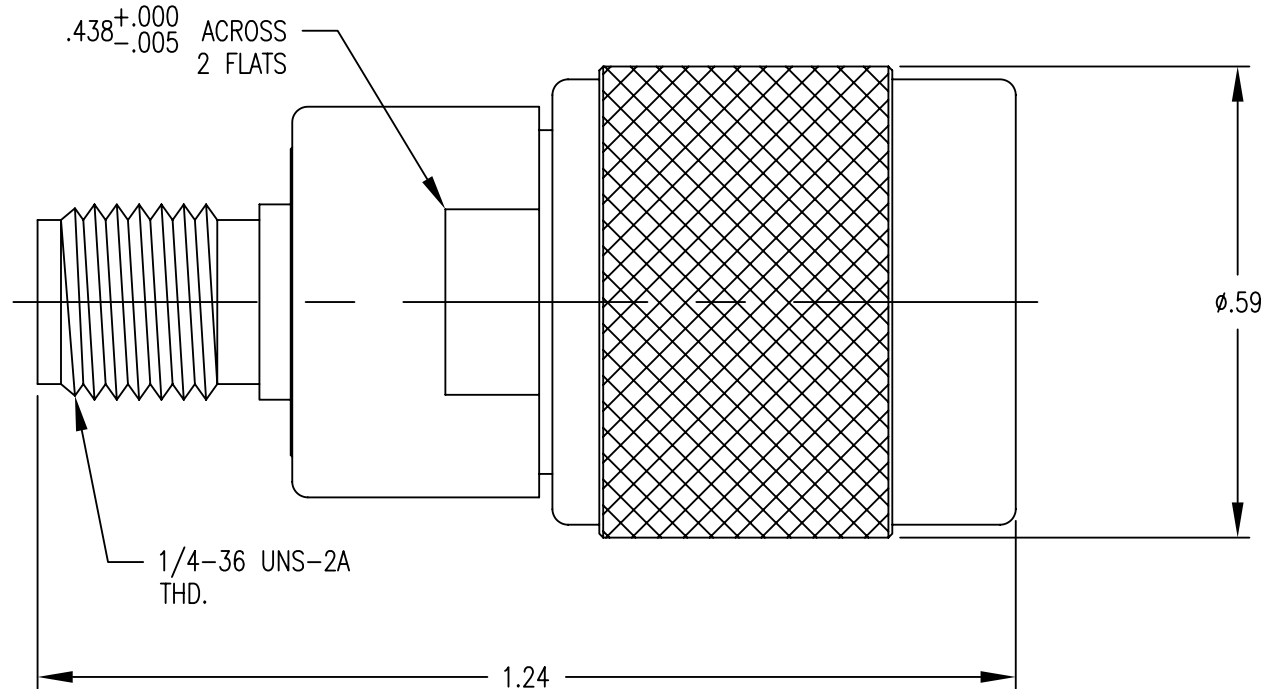

PROPRIETARY
 THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.



SAN • TRON, INC.

4 NEWBURYPORT TPK, IPSWICH, MA 01938

REMOVE ALL BURRS AND SHARP EDGES .005 MAX.
 UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING

TITLE ADAPTER, STRAIGHT, TNC(M) TO SMA(F)

MATERIAL: SEE NOTE 2.0 FINISH: SEE NOTE 3.0

Rev.	Revisions	Date	Dwn.	Appd.
B	ADD PLATING TABLE	8/25/09	FSH	FSH
A	ORIGINAL	6/18/02		

UNSPECIFIED TOL.	DWN	JMB	6/18/02
.XX ± .010	CHKD	SJS	6/18/02
.XXX ± .005	APPR	CHS	6/18/02
FRAC. ± 1/64			

FSCM NO. 50896	DWG NO. OL-0910-27-1	REV. B
SCALE 4:1		

RECOM. STOCK SIZE	FT/M PCS	QTY REQD

CONCENTRICITY .004 TIR
 ALL MACHINED SURFACES