



10 dB DC Bias Attenuator, N Male To N Female Passivated
Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz

TECHNICAL DATA SHEET

PE7062-10

10 dB DC Bias Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz

Configuration

Design	DC Bias, Bidirectional Attenuator
Connector 1	N Male
Connector 2	N Female
Body Material and Plating	Passivated Stainless Steel

Electrical Specifications

Frequency Range, GHz	0.5 to 2
Impedance, Ohms	50
Attenuation Value, dB	10
Maximum Input Power, Watts	2
Maximum VSWR	1.35:1

Frequency 1

Range, GHz	0.5 to 2
VSWR	1.35:1
Attenuation Accuracy, dB	± 2

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +125
------------------------	-------------

Size

Length, in [mm]	1.753 [44.53]
Width, in [mm]	0.8 [20.32]

Connector 1

Type	N Male
Connector Specification	MIL-STD-348
Contact Material and Plating	Beryllium Copper, Gold
Coupling Nut Material and Plating	Brass, Nickel
Body Material and Plating	Passivated Stainless Steel

Connector 2

Type	N Female
Connector Specification	MIL-STD-348
Contact Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB DC Bias Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz PE7062-10](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





10 dB DC Bias Attenuator, N Male To N Female Passivated
Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz

TECHNICAL DATA SHEET

PE7062-10

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant Yes

Plotted and Other Data
Notes:

Values at 25 °C, sea level

10 dB DC Bias Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB DC Bias Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz PE7062-10](http://www.pasternack.com/10db-dc-bias-n-male-n-female-2-watts-attenuator-pe7062-10-p.aspx)

URL: <http://www.pasternack.com/10db-dc-bias-n-male-n-female-2-watts-attenuator-pe7062-10-p.aspx>



The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE7062-10 CAD Drawing

10 dB DC Bias Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts From 500 MHz To 2 GHz

P/N	ATTEN.	FIGURE
PE7062-6	6 dB	1
PE7062-10	10 dB	1
PE7062-20	20 dB	2

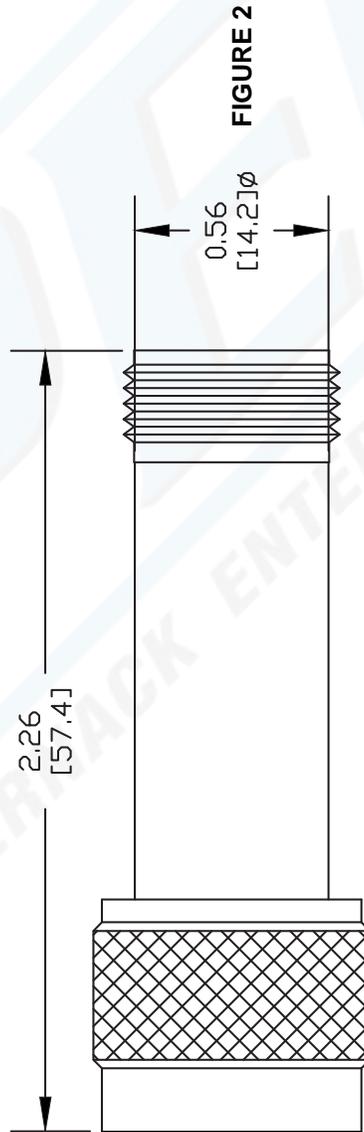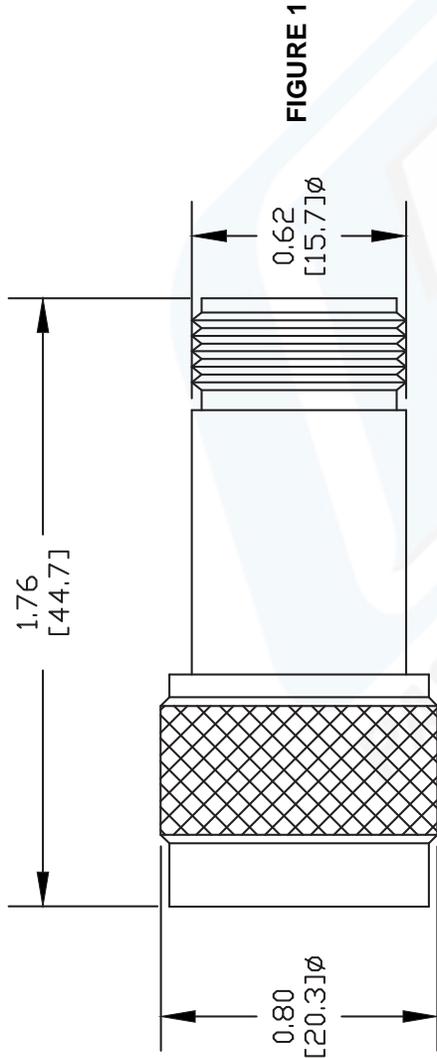

DWG TITLE

PE7062

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 030409

SCALE N/A

SIZE A

XXXX