





18-26GHz Digital 6 Bits 360° Step Phase Shifter

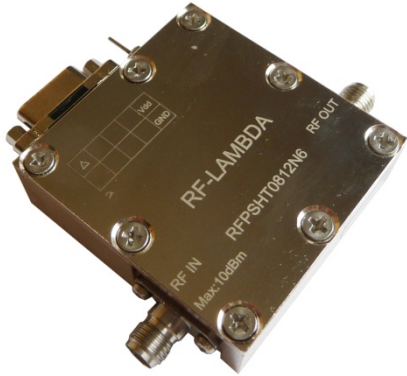

Features

- Wide Band Operation with full 18-26GHz bandwidth.
- High linearity up to 5W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Flat phase shifting response, low phase error.
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Parameter	Min.	Parameter	Max.	Units
Frequency Range	18	-	26	GHz
Insertion Loss	-	-	16.0	dB
Input VSWR	-	2.5	3.5	:1
Output VSWR	-	2.5	3.5	:1
Phase Error*	-	+/- 5.0	+15/-25.0	deg
RMS Phase Error	-	-	10.0	deg
Input Power for 1 dB Compression	-	10	-	dBm
Control Voltage	0	-	5	V
Bias Voltage Current (12V)	-	-	20	mA

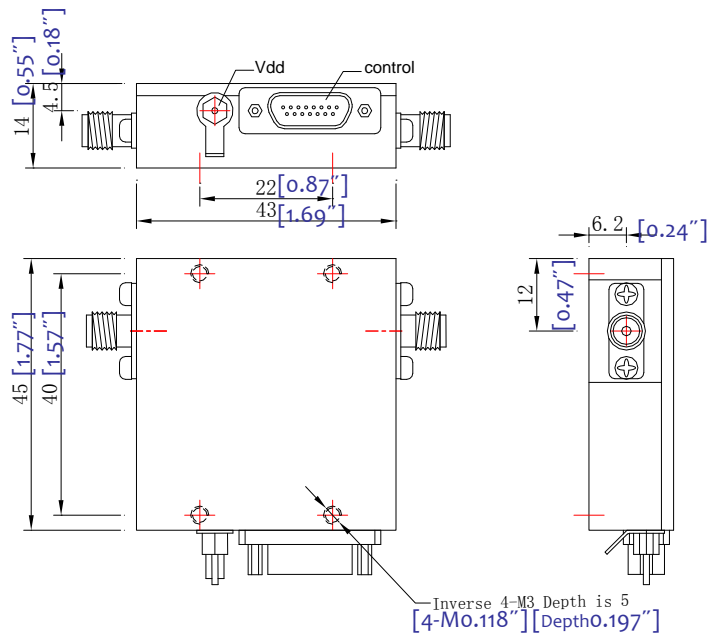

Control Voltage:

State	Voltage
Low(0)	0 to +0.5V
High(1)	+3 to +5V(Note 5)

Absolute Maximum Ratings:

Operating Temperature	-40° C to 85° C
Storage Temperature	-55° C to 100° C
(Vdd) Max!	15V
(Vc):	5.0 V
Input Power (RFI N) Max!	23 dBm






RF-LAMBDA

The power beyond expectations

RFPSHT1826N6

18-26GHz Full Band Digital Step 360° 6 Bits Phase Shifter

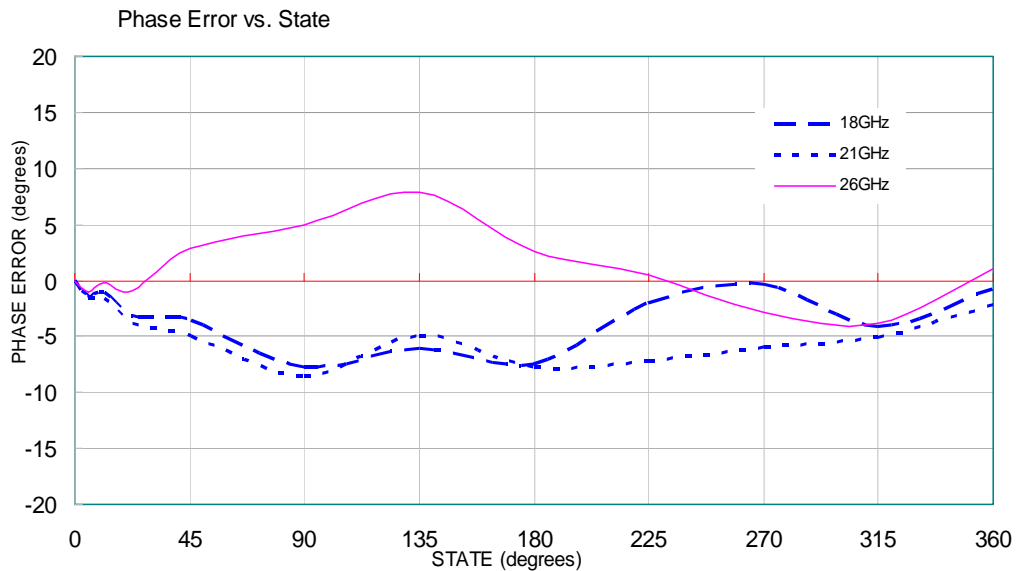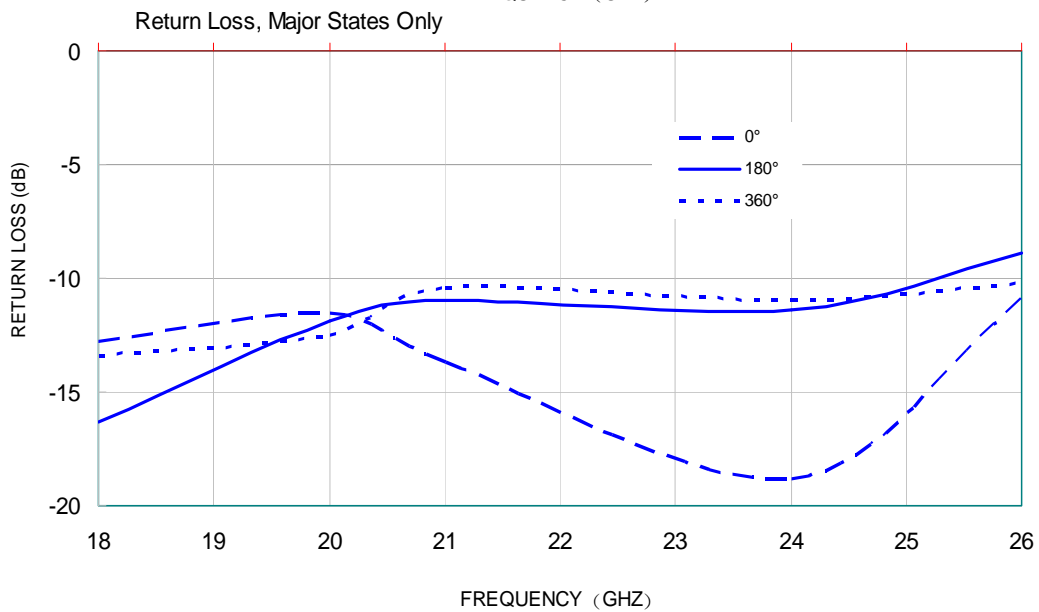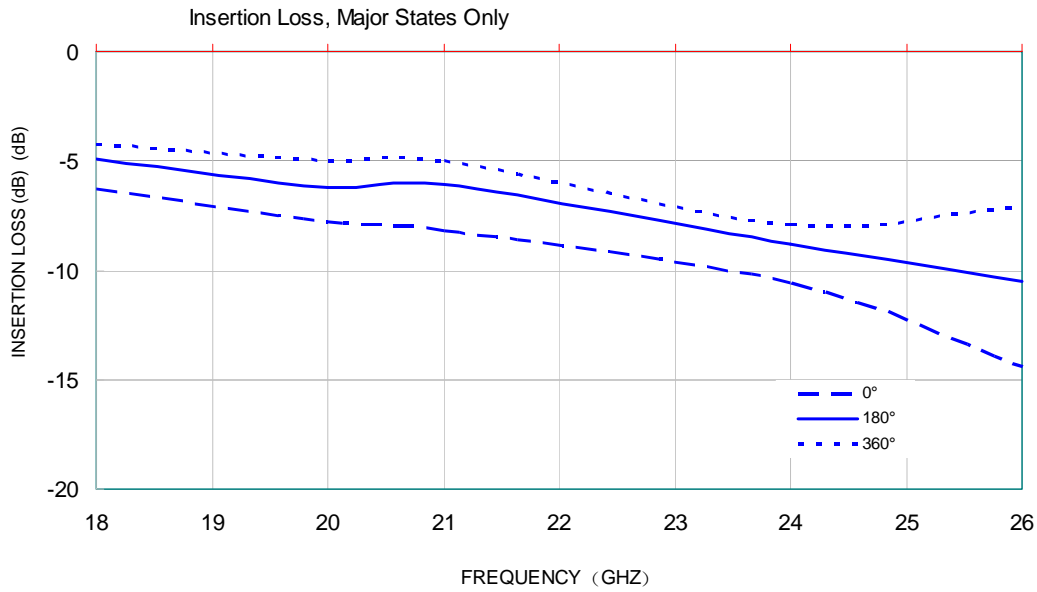




RF-LAMBDA

The power beyond expectations

RFPSHT1826N6

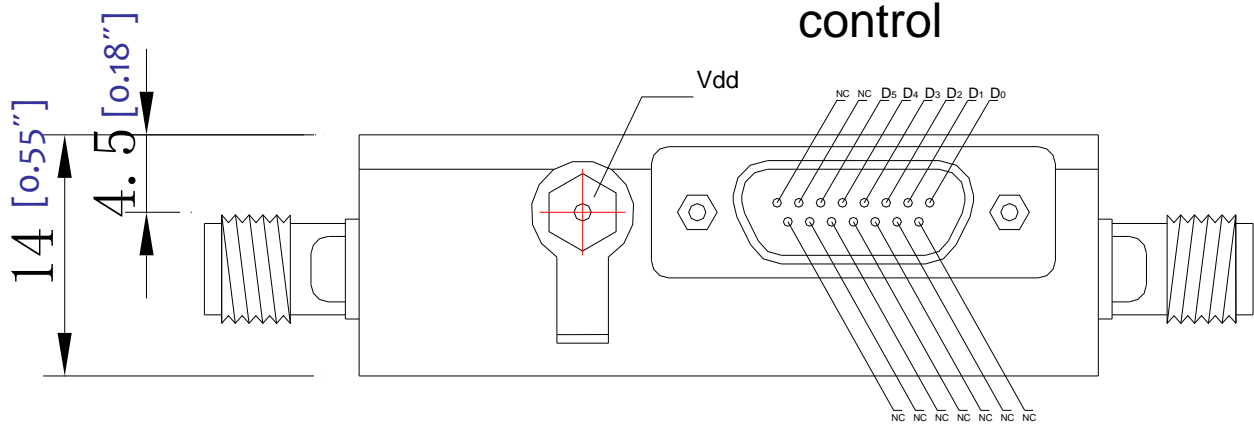

Control Voltage Input						Phase Shift (Degrees) RFIN - RFout
D5	D4	D3	D2	D1	D0	
1	1	1	1	1	1	Reference*
1	1	1	1	1	0	5.625
1	1	1	1	0	1	11.25
1	1	1	0	1	1	22.5
1	1	0	1	1	1	45.0
1	0	1	1	1	1	90.0
0	1	1	1	1	1	180.0
0	0	0	0	0	0	354.375



18-26GHz Full Band Digital Step 360° 6 Bits Phase Shifter