




CAVITY BAND PASS FILTER 1.8925-1.9125GHz

Summary:



- Cavity Filter - Suspended Substrate Stripline Filter
- Flat frequency response and low insertion loss..
- Covers the 1 GHz to 18 GHz Frequency Range
- Wide bandwidth and 3 dB BW Available from 5-50% (f_0)
- Designs that Cover up to 40 GHz Also Available
- MIL-E-5400 standard

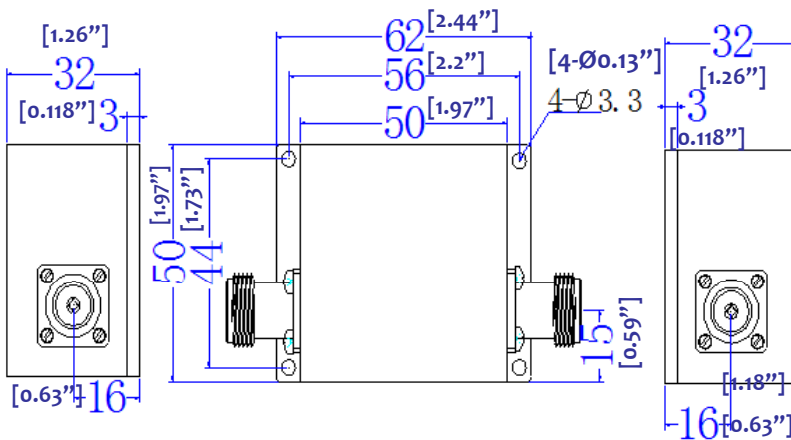


Environmental

Specifications:

Operational Temp. Range: -25°C~+65°C
 Storage Temp. Range: -55°C~+100°C

Pass Band (GHz)	Insertion Loss (dB)	VSWR	Band pass (MHz)	Rejection (dB)	Connector	Power (W)
1.8925-1.9125	1.5	1.3	20	50	N-F	50

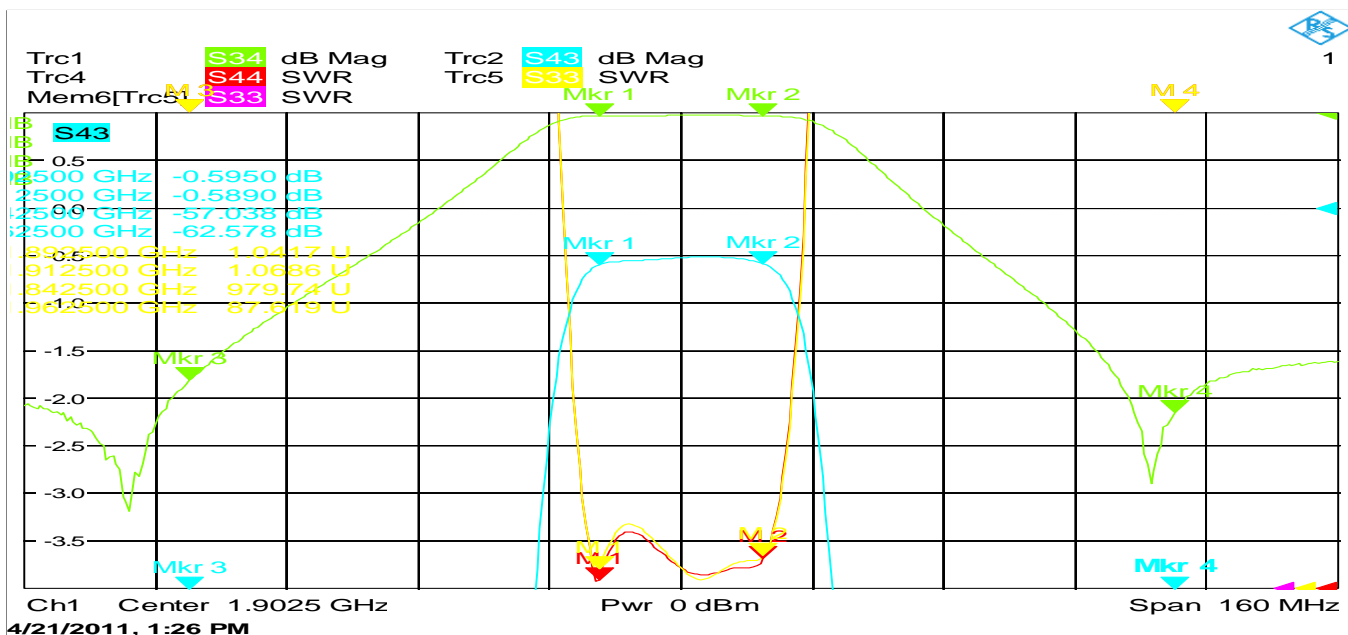

Band Pass Suspended Cavity Filter 1.8925-1.9125GHz