

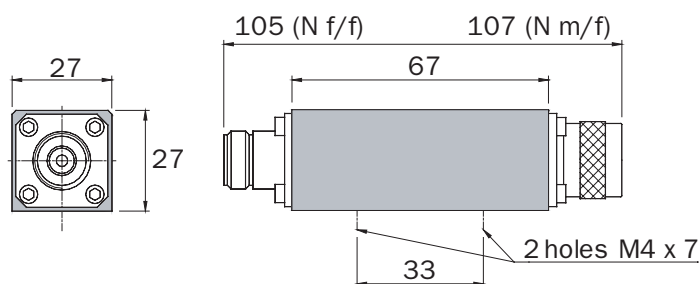


Standards
NF C 96-315
MIL-DTL-3933



Impedance	50 Ω ± 5%
Frequency	DC - 2.5 GHz
Max VSWR	≤ 1.20 at 1 GHz, ≤ 1.30 at 2 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	25 W (without heat sink) 40 W (with heat sink)
Weight	320 g



Dimensions in mm

Attenuation (dB)	P/N (N m/f)	P/N (N f/f)	Accuracy* ±Δα (dB)
1	16-6727	16-6749	0.3
2	16-6728	16-6750	0.3
3	16-4517	16-4980	0.3
6	16-4518	16-4981	0.3
10	16-4519	16-4982	0.5
20	16-4520	16-4868	0.5
30	16-4985	16-4983	1
40	16-4986	16-4984	1

* at 2 GHz

Model available with 7-16 connector
Others attenuations on request

