


- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-4GHz
- 1.2 VOLTAGE RATING: 500V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: PTFE

- 2.2 CONTACT: BeCu
- 2.3 ALL OTHER METAL PARTS: BRASS
- 3.0. FINISHES: SEE TABLE
- 4.0 MECHANICAL
- 4.1 INTERFACE WILL MATE WITH CONNECTORS AND ADAPTERS WHICH HAVE MIL-STD-348 BNC INTERFACES

DWG NO. OL-914-1		REV. B
PART NUMBER	BODY	CONTACT
UG-914/U	NICKEL	SILVER
UG-914/U Ni/GOLD	NICKEL	GOLD
UG-914/U Si	SILVER	SILVER
UG-914/U Si/GOLD	SILVER	GOLD

PLATING PER SAN-TRON SPEC. 7.3.1-8

STAMP PER ORDER

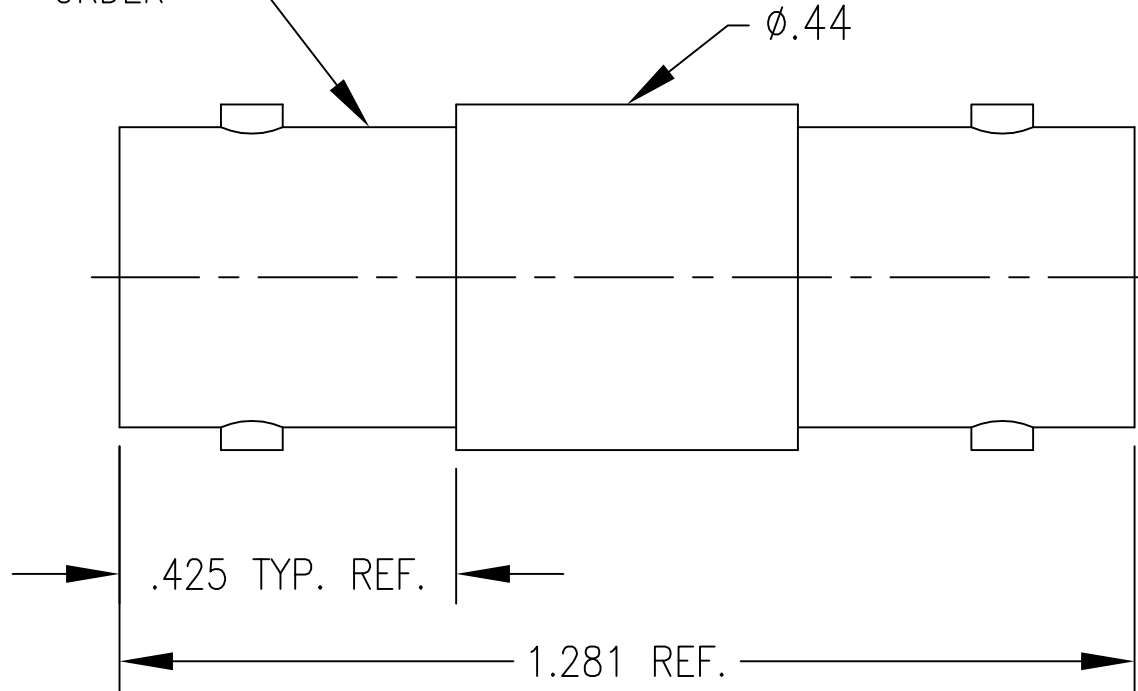

DO NOT SCALE DRAWING

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.



SAN-TRON, INC.


4 NEWBURYPORT TPK. IPSWICH MA USA 01938
 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573
 WWW. santron.com E MAIL: santron@santron.com

UNLESS OTHERWISE SPECIFIED:
 ALL DIMENSIONS ARE IN INCHES.
 ALL DIMENSIONS ARE AFTER PLATING.
 .XXX= ±.005 ALL MACHINED SURFACES $64\sqrt{\text{MAX.}}$
 .XX= ±.01 ANG.±1/2° FRACTIONAL= ±1/64
 ◎.004 MAX. TIR. ⊥ AXIS .001

TITLE
ADAPTER, STRAIGHT, BNC (F) - BNC (F)

MATERIAL:
 SEE NOTES

FINISH:
 SEE TABLE



DWN	JMB	6/8/00
CHKD	SJS	12/6/01
APPR	JO	12/7/01

CAGE CODE: 50896

DWG NO.
 OL-914-1

REV.
 B

SCALE X:X

Rev.	Revisions	Disp.	Date	Dwn.	Appd.
B	UPDATED OL NOTE, PLATING TABLE & TITLE BLOCK		3/30/10	JTH	JTH
A	ORIGINAL	NEW	12/7/01		

Ref.:	REMOVE ALL BURRS AND SHARP EDGES .005 MAX.	INTERPRET PER ASME Y14.5M-1994
SK-		