

1700 to 1900MHz –Band Stop Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

| Model Number | Band Reject Frequency (MHz) | Pass Band Frequency | Band Reject Rejection Min(dB) | VSWR Max | Insertion Loss Max(dB) | Power (W) | Connector Type | Temp.(°C) |
|-------------------------|-----------------------------|----------------------------|-------------------------------|----------|------------------------|-----------|----------------|-----------|
| UIYBSF20960A1700T1900SF | 1700 ~ 1900 | DC~1550MHz 2050~4500MHz | 40 | 2.0 | 1.5 | 50 | SMA-F | -55 ~ +85 |

- ² Listed are specific frequency ranges and other ranges are available.
- ² Please provide the below informations when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

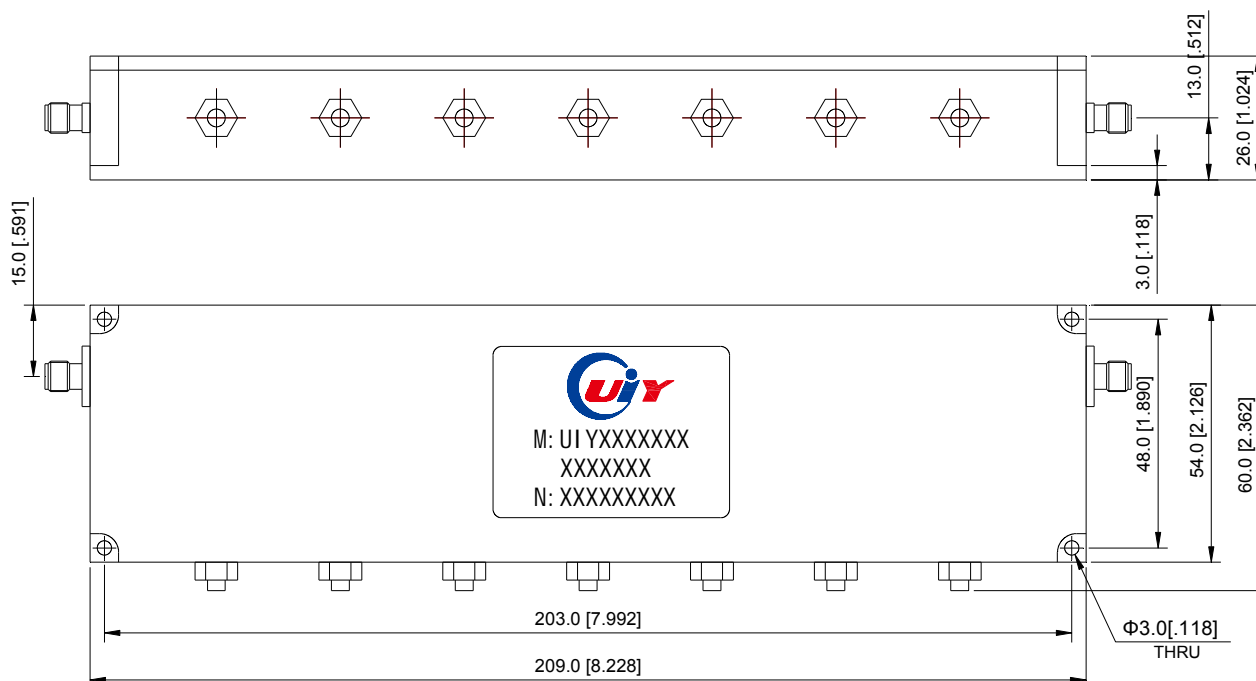

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com