

35 MHz < Fco < 39.99 MHz

High Pass

Slope 0.9 x Fco

Passband Limit 1000 MHz


WHK10-__SS

Attenuation 40 dB

Specifications

| | |
|--------------------------|---|
| Passband: | __ to 1000 MHz |
| Passband Insertion Loss: | 2 dB max. (4.8 dB max. at Fco) |
| Passband Return Loss: | 14 dB min. (VSWR 1.5:1 max.) |
| Stopband: | DC to __ MHz |
| Stopband Attenuation: | 40 dB min. |
| Operating Temperature: | 5 °C to 45 °C |
| Power Handling: | max. 20 W CW into a 2:1 VSWR (Please see our warranty in this regard) |
| Dimensions (L x W x H): | max. 115 x 19 x 13.2 mm (plus connectors and flanges) |
| Approx. Weight: | 0.08 kg |
| Mounting Provision: | 5.5 mm flanges on both ends with 2.1 mm holes |
| Connector 1: | SMA Female |
| Connector 2: | SMA Female |

Typical Performance

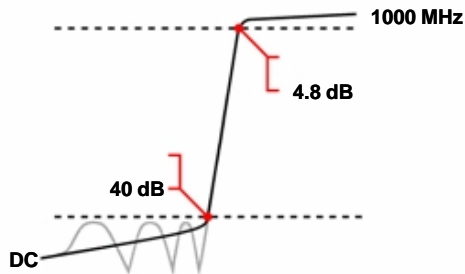


10 Section Chebyshev Design



Connector Options

SMA Female

©2013 Wainwright Instruments. All rights reserved.

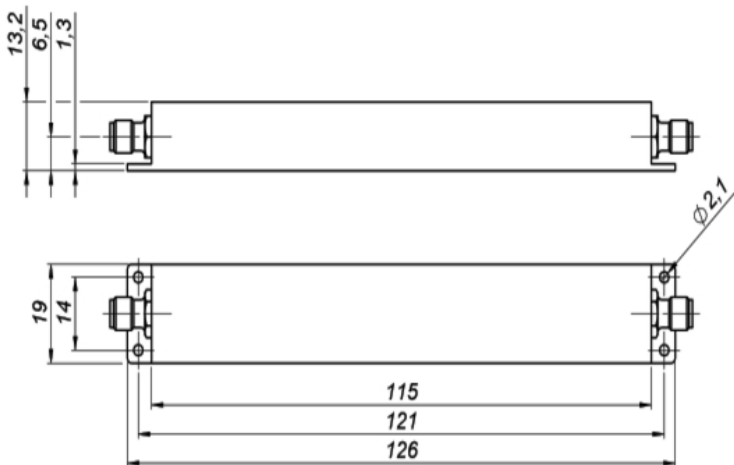

Euro Prices

(USD Prices will be quoted for US-based customers only)

| | |
|--------------|-------|
| 1 - 4 pcs: | € 467 |
| 5 - 9 pcs: | € 420 |
| 10 - 24 pcs: | € 378 |

Delivery Terms

FCA Andechs (free carrier) according to **Incoterms 2010**
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2010** (unversichert).
 Regarding payment terms and warranty see [Terms and Conditions](#).
Delivery time: normally 3 to 4 weeks - depending on quantity ordered and on our work load.

Customer is responsible for observing all applicable export laws in regard to filter application and location of end user



Wainwright Instruments GmbH
 www.wainwright-filters.com

Tel: +49 8152 918230
 Fax: +49 8152 918255
 info@wainwright-filters.com