

5.7 to 7.5GHz – Microstrip Circulator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYMC1010A57T6	5.7 ~ 6.0	0.5	20	1.25	10	10	Microstrip	-55 ~ +85
UIYMC1010A58T67	5.8 ~ 6.7	0.5	18	1.3	10	10	Microstrip	-55 ~ +85
UIYMC1010A6T65	6.0 ~ 6.5	0.5	20	1.25	10	10	Microstrip	-55 ~ +85
UIYMC1010A64T7	6.4 ~ 7.0	0.5	20	1.25	10	10	Microstrip	-55 ~ +85
UIYMC1010A65T75	6.5 ~ 7.5	0.5	20	1.3	10	10	Microstrip	-55 ~ +85

² List are specify frequency range and other ranges available.


² Please enter below information when inquiry and mark * is must.

* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

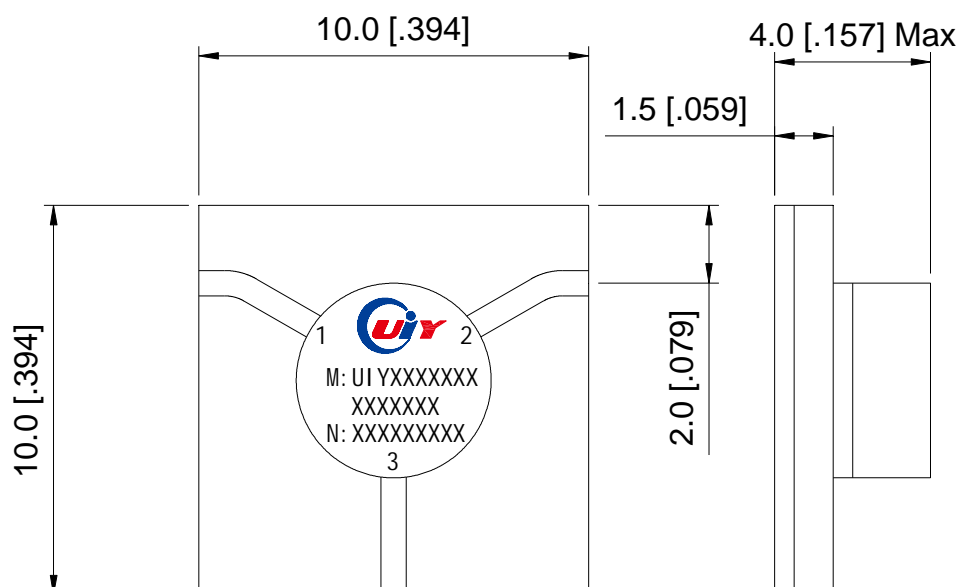

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com