

Coaxial

Voltage Controlled Oscillator

ZX95-3214C+

5V Tuning for PLL IC's 3074 to 3200 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing & pulling
- protected by US patent 6,790,049

Applications

- r & d
- lab
- instrumentation
- wireless communications
- point-to-point radio
- WiMAX



CASE STYLE: GB956

| Connectors | Model | Price | Qty. |
|------------|---------------|-------------|-------|
| SMA | ZX95-3214C-S+ | \$44.95 ea. | (1-9) |

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications


| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, KHz | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | |
|-------------|-------------|------|--------------------|---|------|------|------|--------|-------------------|-----------------------|---------------|---------------------------------|-----------------------------|-----------------|------|-----------------------------|-----------------|--------------------|------|
| | Min. | Max. | | Typ. | 1 | 10 | 100 | 1000 | VOLTAGE RANGE (V) | SENSI- TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | | Typ. | Typ. | | | Typ. | Typ. |
| ZX95-3214C+ | 3074 | 3200 | +2 | -77 | -102 | -123 | -143 | 0.5 | 4.5 | 45-57 | 40 | 20 | -90 | -21 | -15 | 2.5 | 0.3 | 5 | 40 |

Maximum Ratings

| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 7V |
| Absolute Max. Tuning Voltage (Vtune) | 6V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

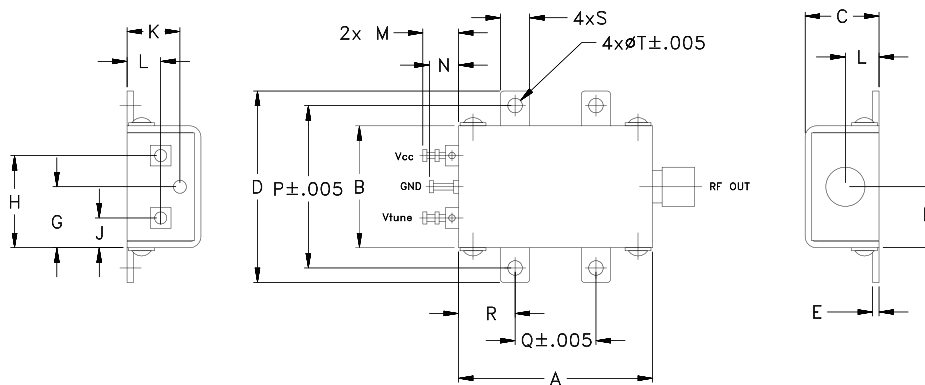

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







REV. OR
M108616
EDR-8148
ZX95-3214C+
RAV
120905
Page 1 of 2

Performance Data & Curves*

ZX95-3214C+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 3137 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|--------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 52.06 | 3029.2 | 3015.0 | 3007.1 | 2.62 | 2.43 | 2.02 | 32.04 | -18.8 | -21.5 | -44.8 | 1.02 | 2.71 | -78.5 | -103.3 | -123.3 | -143.3 | 1.0 | -75.09 |
| 0.25 | 48.34 | 3041.6 | 3028.0 | 3020.5 | 2.62 | 2.45 | 2.04 | 32.00 | -19.2 | -22.1 | -42.4 | 0.68 | 3.24 | -77.9 | -102.9 | -123.4 | -142.6 | 2.0 | -86.88 |
| 0.50 | 46.48 | 3053.4 | 3040.1 | 3032.8 | 2.59 | 2.48 | 2.06 | 31.96 | -19.7 | -20.9 | -46.0 | 0.50 | 3.23 | -78.0 | -102.9 | -123.4 | -143.3 | 3.5 | -91.55 |
| 0.75 | 45.76 | 3064.9 | 3051.7 | 3044.5 | 2.55 | 2.46 | 2.06 | 31.93 | -19.6 | -22.2 | -41.9 | 0.41 | 2.62 | -76.2 | -102.7 | -123.0 | -142.3 | 6.0 | -96.65 |
| 1.00 | 45.58 | 3076.2 | 3063.2 | 3056.0 | 2.50 | 2.46 | 2.06 | 31.89 | -19.9 | -22.6 | -49.4 | 0.35 | 1.23 | -76.9 | -102.6 | -122.9 | -143.5 | 8.5 | -100.95 |
| 1.25 | 45.28 | 3087.4 | 3074.6 | 3067.3 | 2.48 | 2.41 | 2.03 | 31.84 | -20.3 | -21.5 | -44.9 | 0.30 | 1.38 | -78.3 | -102.6 | -122.8 | -142.3 | 10.0 | -101.44 |
| 1.50 | 45.93 | 3098.6 | 3085.9 | 3078.7 | 2.46 | 2.39 | 1.98 | 31.80 | -20.4 | -22.3 | -47.3 | 0.29 | 2.66 | -77.4 | -102.7 | -123.0 | -142.7 | 20.8 | -108.61 |
| 1.75 | 47.37 | 3110.3 | 3097.4 | 3090.1 | 2.44 | 2.36 | 1.96 | 31.76 | -20.4 | -23.2 | -47.7 | 0.26 | 3.21 | -77.4 | -102.4 | -123.0 | -143.8 | 35.5 | -113.28 |
| 2.00 | 49.20 | 3122.4 | 3109.2 | 3101.8 | 2.41 | 2.35 | 1.92 | 31.71 | -20.4 | -21.8 | -45.1 | 0.25 | 2.94 | -75.5 | -102.5 | -123.0 | -142.7 | 60.7 | -117.60 |
| 2.25 | 50.73 | 3134.8 | 3121.5 | 3113.8 | 2.35 | 2.35 | 1.91 | 31.66 | -20.8 | -22.7 | -51.1 | 0.25 | 2.20 | -77.3 | -102.3 | -122.6 | -142.7 | 86.7 | -120.95 |
| 2.50 | 52.44 | 3147.6 | 3134.2 | 3126.3 | 2.31 | 2.33 | 1.90 | 31.62 | -21.1 | -24.5 | -44.8 | 0.27 | 1.13 | -75.1 | -101.2 | -122.4 | -142.6 | 100.0 | -122.49 |
| 2.75 | 52.97 | 3160.5 | 3147.3 | 3139.3 | 2.27 | 2.30 | 1.86 | 31.58 | -21.1 | -23.1 | -51.5 | 0.30 | 1.34 | -76.2 | -101.5 | -122.3 | -142.6 | 148.1 | -125.79 |
| 3.00 | 53.81 | 3173.7 | 3160.6 | 3152.6 | 2.24 | 2.27 | 1.82 | 31.55 | -21.0 | -24.0 | -45.9 | 0.34 | 2.79 | -77.7 | -101.8 | -122.7 | -142.6 | 177.0 | -127.46 |
| 3.25 | 55.50 | 3187.3 | 3174.0 | 3166.0 | 2.21 | 2.25 | 1.77 | 31.51 | -21.8 | -23.7 | -50.3 | 0.40 | 3.35 | -78.8 | -101.9 | -122.5 | -142.6 | 211.6 | -128.85 |
| 3.50 | 57.28 | 3201.4 | 3187.9 | 3179.8 | 2.22 | 2.21 | 1.70 | 31.47 | -22.6 | -22.8 | -43.8 | 0.49 | 3.17 | -76.7 | -101.5 | -122.4 | -142.0 | 302.4 | -131.69 |
| 3.75 | 59.26 | 3216.0 | 3202.2 | 3193.9 | 2.24 | 2.22 | 1.65 | 31.42 | -22.6 | -24.3 | -46.3 | 0.62 | 1.96 | -76.7 | -101.3 | -122.3 | -142.2 | 507.5 | -136.16 |
| 4.00 | 60.66 | 3231.0 | 3217.0 | 3208.5 | 2.23 | 2.22 | 1.61 | 31.36 | -22.5 | -23.9 | -43.1 | 0.82 | 1.29 | -76.1 | -101.0 | -122.0 | -141.8 | 606.7 | -137.90 |
| 4.25 | 61.07 | 3246.3 | 3232.2 | 3223.5 | 2.16 | 2.22 | 1.55 | 31.32 | -23.5 | -23.2 | -44.0 | 1.10 | 2.96 | -73.4 | -100.1 | -121.7 | -141.9 | 851.6 | -140.71 |
| 4.50 | 60.54 | 3261.4 | 3247.5 | 3238.8 | 2.08 | 2.16 | 1.50 | 31.29 | -24.2 | -24.9 | -43.1 | 1.47 | 3.39 | -72.3 | -100.6 | -121.8 | -142.0 | 1000.0 | -142.65 |

*at 25°C unless mentioned otherwise

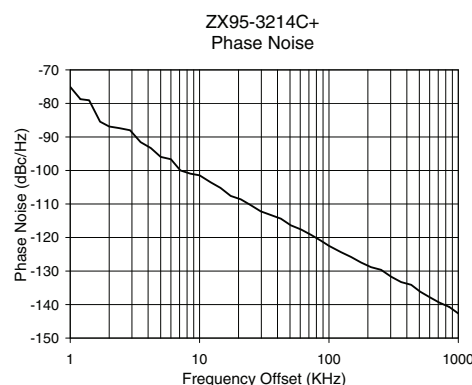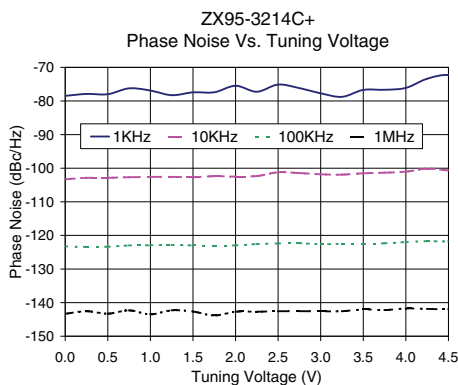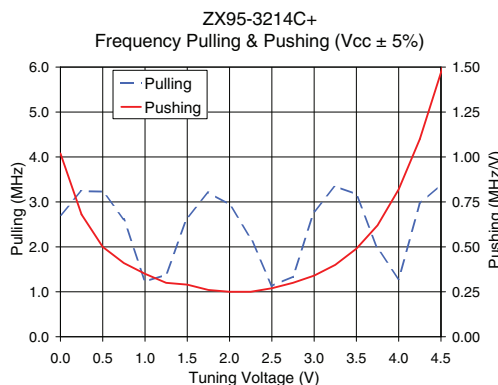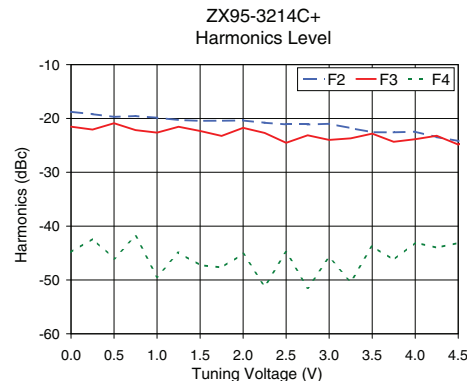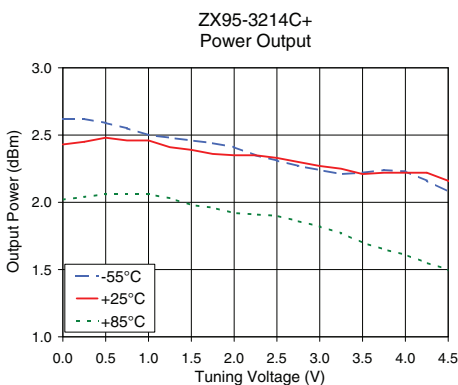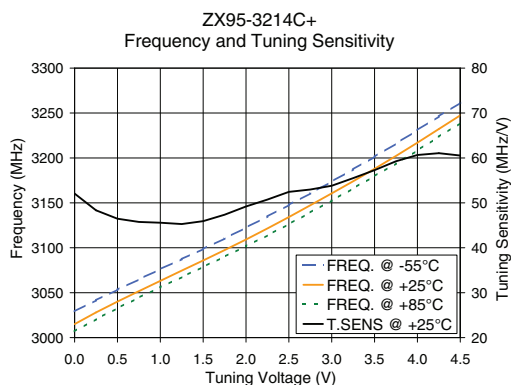

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.