

1000 MHz < Fco < 1999.99 MHz

High Pass

Slope 0.9 x Fco

Passband Limit 15000 MHz


WHKX10-__

Attenuation 40 dB


Specifications

Passband:	__ to 15000 MHz
Passband Insertion Loss:	1.4 dB max. (2 dB max. at Fco)
Passband Return Loss:	12 dB min. (VSWR 1.67:1 max.)
Stopband:	DC to __ MHz
Stopband Attenuation:	40 dB min.
Operating Temperature:	5 °C to 45 °C
Power Handling:	max. 5 W CW into a 2:1 VSWR (Please see our <u>warranty</u> in this regard)
Dimensions (L x W x H):	max. 45 x 12.7 x 12.7 mm (plus connectors)
Approx. Weight:	0.04 kg
Mounting Provision:	3 x M2.5 threaded holes in base
Connector 1:	- Please choose -
Connector 2:	- Please choose -

Typical Performance

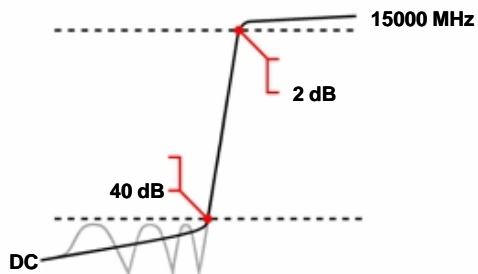

10 Section Chebyshev Design

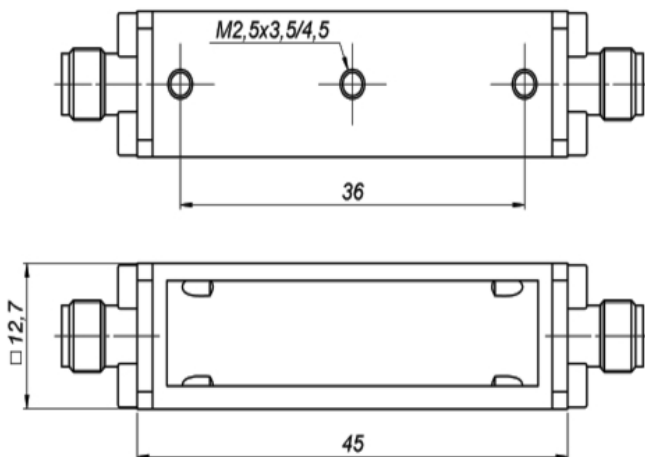

Connector Options

- SMA Female
- SMA Male

©2013 Wainwright Instruments. All rights reserved.

Euro Prices	1 - 4 pcs:	€ 940
(USD Prices will be quoted for US-based customers only)	5 - 9 pcs:	€ 846
	10 - 24 pcs:	€ 761

Delivery Terms FCA Andechs (free carrier) according to **Incoterms 2010**
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2010** (unversichert).
 Regarding payment terms and warranty see Terms and Conditions.
Delivery time: normally 3 to 4 weeks - depending on quantity ordered and on our work load.

Customer is responsible for observing all applicable export laws in regard to filter application and location of end user



Wainwright Instruments GmbH
 www.wainwright-filters.com

Tel: +49 8152 918230
 Fax: +49 8152 918255
 info@wainwright-filters.com