


Key Features:

- Wide frequency range: 2000-4000MHz partial or full band
- 50 ohm SMA coaxial connectors
- Small size, low cost
- Power handling +30 Watts forward, +10 Watts reverse
- Operating temperature -20~+70°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2122-0300-67	2.00-4.00	0.5 Max	≥ 18	≤ 1.35	≥ 30	>10	-20 ~ +65
F2122-0255-27	2.20-2.90	0.5 Max	≥ 22	≤ 1.25	≥ 10	>10	-15 ~ +70

Mechanical Structure:

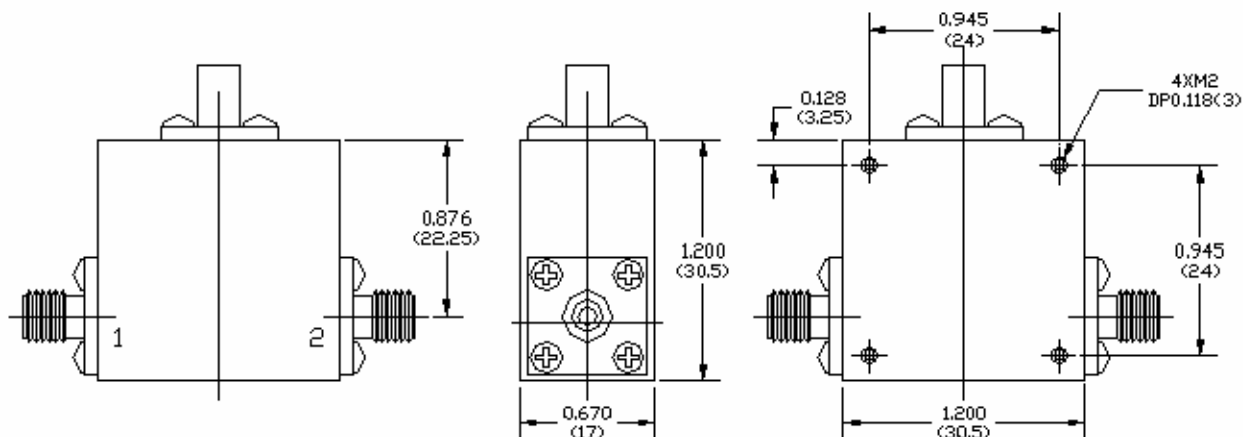

Note: All units in inches (mm).

Ordering Information:

