

# TERMINATION SMA/MALE 3 GHZ 5 WATTS

ST3051

## SPECIFICATIONS

### ELECTRICAL:

FREQUENCY: 0-3 GHZ  
VSWR 1.2 TO 3 GHZ  
POWER (AVG) 5 WATTS @ 25 DEG C  
IMPEDANCE: 50 OHMS

### MECHANICAL:


MATERIAL CONNECTORS: TRIMETAL PLATED BRASS  
MATERIAL RING & CONTACTS: BRASS  
CENTER CONTACT: GOLD PLATED

RECOMMENDED TORQUE: 7-9 IN-LBS


### ENVIRONMENTAL:

TEMP: -55 C to +125° C

ROHS COMPLIANT

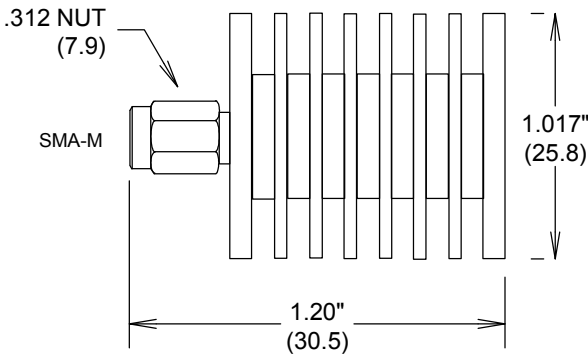

### MEASUREMENTS BELOW ARE TYPICAL

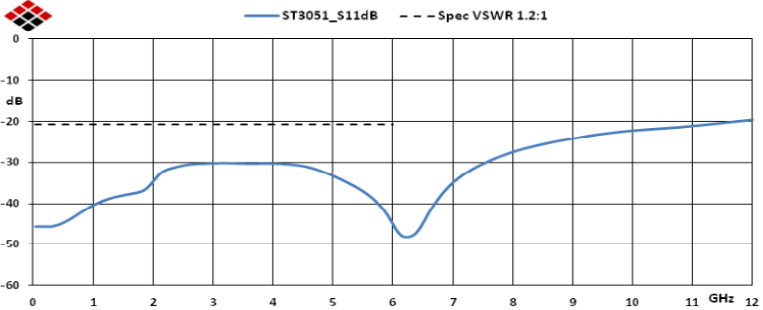

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**TERMINATION SMA/MALE 3 GHZ 5 WATTS**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	ST3051	A
SCALE	SHEET		