




160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181 • FAX 215-723-5688

MODELS 10W1000C
M1, M2, M3, M4
10 WATTS CW
500 kHz - 1000 MHz

The Model 10W1000C is a portable, self-contained, air-cooled, broadband, solid state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in the high power stages to lower distortion and improve stability. The 10W1000C, when used with an RF sweep generator, will provide a minimum of 10 watts of swept power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 10W1000C is protected from RF input overdrive by limiting diodes and an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF Amplifier stages are protected from over temperature by removing the DC voltage to them if an over temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions when an over temperature, power supply, or amplifier fault has occurred. The unit can be returned to operate when the condition has been cleared. The 10W1000C includes digital control for both local and remote control of the amplifier. This 8-bit RISC microprocessor controlled board provides both IEEE-488 (GPIB) and asynchronous, full duplex RS-232 control of all amplifier functions.

10W1000C TYPICAL POWER OUTPUT

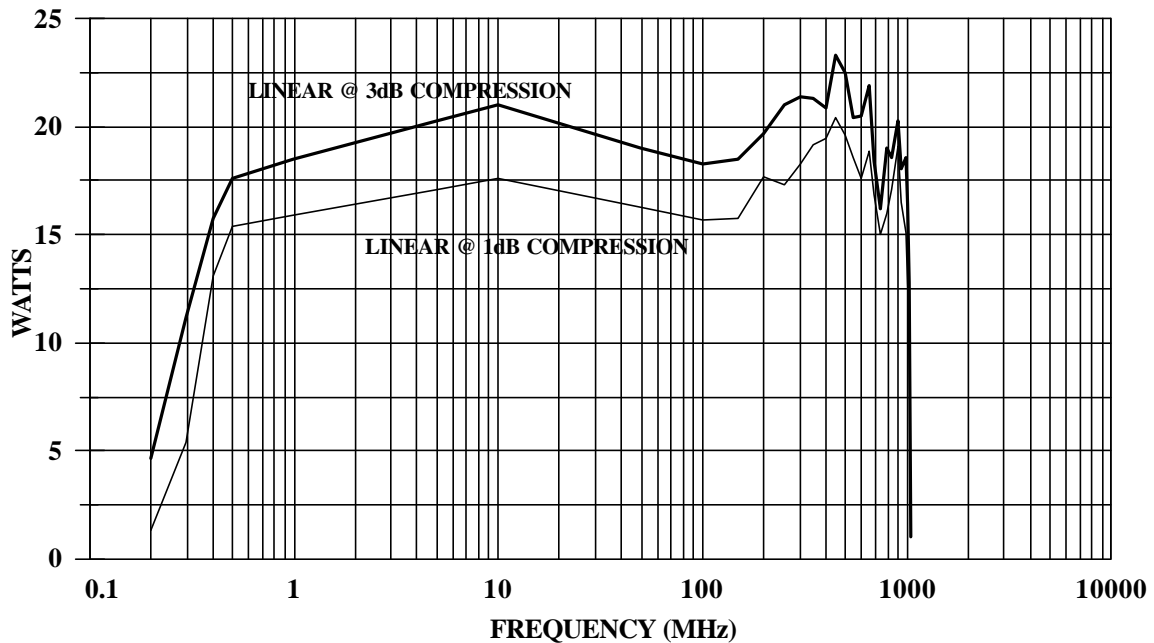

SPECIFICATIONS
Model 10W1000C

RATED POWER OUTPUT	<i>10 watts minimum</i>
INPUT FOR RATED OUTPUT	<i>1.0 milliwatt maximum</i>
POWER OUTPUT @ 3dB COMPRESSION	
<i>Nominal</i>	<i>20 watts</i>
<i>Minimum</i>	<i>10 watts</i>
POWER OUTPUT @ 1dB COMPRESSION	
<i>Nominal</i>	<i>17 watts</i>
<i>Minimum</i>	<i>10 watts</i>
FLATNESS	<i>±1.0 dB typical</i> <i>±1.5 dB maximum</i>
FREQUENCY RESPONSE	<i>500 kHz-1000 MHz instantaneously</i>
GAIN (at maximum setting)	<i>40 dB minimum</i>
GAIN ADJUSTMENT (Continuous Range)	<i>20 dB minimum (4096 steps remote)</i>
INPUT IMPEDANCE	<i>50 ohms, VSWR 2.0:1 maximum</i>
OUTPUT IMPEDANCE	<i>50 ohms, nominal</i>
MISMATCH TOLERANCE *	<i>100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.</i>
MODULATION CAPABILITY	<i>Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal</i>
HARMONIC DISTORTION	<i>Minus 20 dBc maximum at 10 watts</i>
THIRD ORDER INTERCEPT POINT	<i>50 dBm typical</i>
PRIMARY POWER (selected automatically)	<i>90-132, 180-264 VAC</i> <i>50/60 Hz, single phase</i> <i>300 watts maximum</i>
REMOTE INTERFACES	<i>IEEE-488, RS-232</i>
CONNECTORS	
RF	<i>Type N female</i>
REMOTE CONTROL	
IEEE-488	<i>24 pin female</i>
RS-232	<i>9 pin Subminiature D (female)</i>
REMOTE INTERLOCK	<i>15 Pin Subminiature D</i>
COOLING	<i>Forced air (self contained fans)</i>
WEIGHT	<i>See Model Configurations</i>
SIZE (WxHxD)	<i>See Model Configurations</i>

* See Application Note #27

MODEL CONFIGURATIONS

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	WEIGHT
<i>10W1000C</i>	<i>Type N female on front panel</i>	<i>Type N female on front panel</i>	<i>20.5 kg (45.0 lb)</i>	<i>50.3 x 15.5 x 37.6 cm</i> <i>19.8 x 6.1 x 14.8 in</i>
<i>10W1000CM1</i>	<i>Type N female on rear panel</i>	<i>Type N female on rear panel</i>	<i>20.5 kg (45.0 lb)</i>	<i>50.3 x 15.5 x 37.6 cm</i> <i>19.8 x 6.1 x 14.8 in</i>
<i>10W1000CM2</i>	<i>Same as 10W1000C with enclosure removed for rack mounting</i>		<i>16.0 kg (35.0 lb)</i>	<i>48.3 x 12.7 x 37.6 cm</i> <i>19.0 x 5.0 x 14.8 in</i>
<i>10W1000CM3</i>	<i>Same as 10W1000CM1 with enclosure removed for rack mounting</i>		<i>16.0 kg (35.0 lb)</i>	<i>48.3 x 12.7 x 37.6 cm</i> <i>19.0 x 5.0 x 14.8 in</i>
<i>10W1000CM4</i>	<i>Same as 10W1000CM3 with firmware changes – The 10W1000CM4 turns on and is at maximum gain when the AC input is applied in either the local or remote functions</i>		<i>16.0 kg (35.0 lb)</i>	<i>48.3 x 12.7 x 37.6 cm</i> <i>19.0 x 5.0 x 14.8 in</i>