
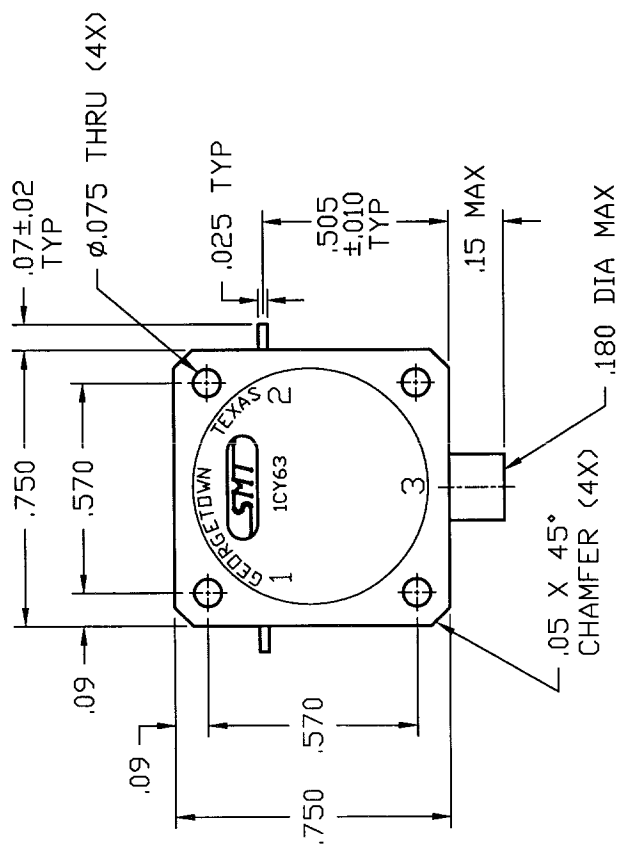


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	
		APPROVED

- SPECIFICATIONS:**
- FREQUENCY RANGE.....1.435 TO 1.535 GHz
 - VSWR.....1.25:1 MAX
 - ISOLATION.....20 dB MIN
 - INSERTION LOSS.....0.4 dB MAX
 - TEMPERATURE:
 OPERATING.....-54° TO +85°C
 STORAGE.....-54° TO +85°C

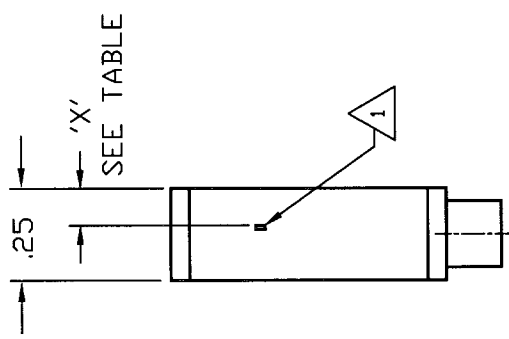

TAB HEIGHT TABLE	
OPTION NO.	HEIGHT (NOM)
A	.065
B	.075
C	.090
D	.100
E	.120

NOTES:

- TABS ARE .005±.001 THK Be Cu, GOLD PLATED
- CASE: STAINLESS STEEL NICKEL PLATED.

QTY	FSCM	PART OR	NOMENCLATURE	MATERIAL
REQD	NO.	IDENTIFYING	OR DESCRIPTION	SPECIFICATION
			PARTS LIST	
FRACTIONS		APPROVALS		DATE
DECIMALS		DRAWN		
ANGLES		CHECKED		
± .XXX ± .01 ±		ISSUED		
± .XXX ± .005				
MATERIAL				
FINISH				
203-0135-001		SDI0115-X		
NEXT ASSY		USED ON		
APPLICATION				
		SIERRA MICROWAVE TECHNOLOGY		
		OUTLINE FOR SDI0115-X		
		SIZE	DWG. NO.	REV.
		B	1CY63	205-2233-001
		SCALE		SHEET