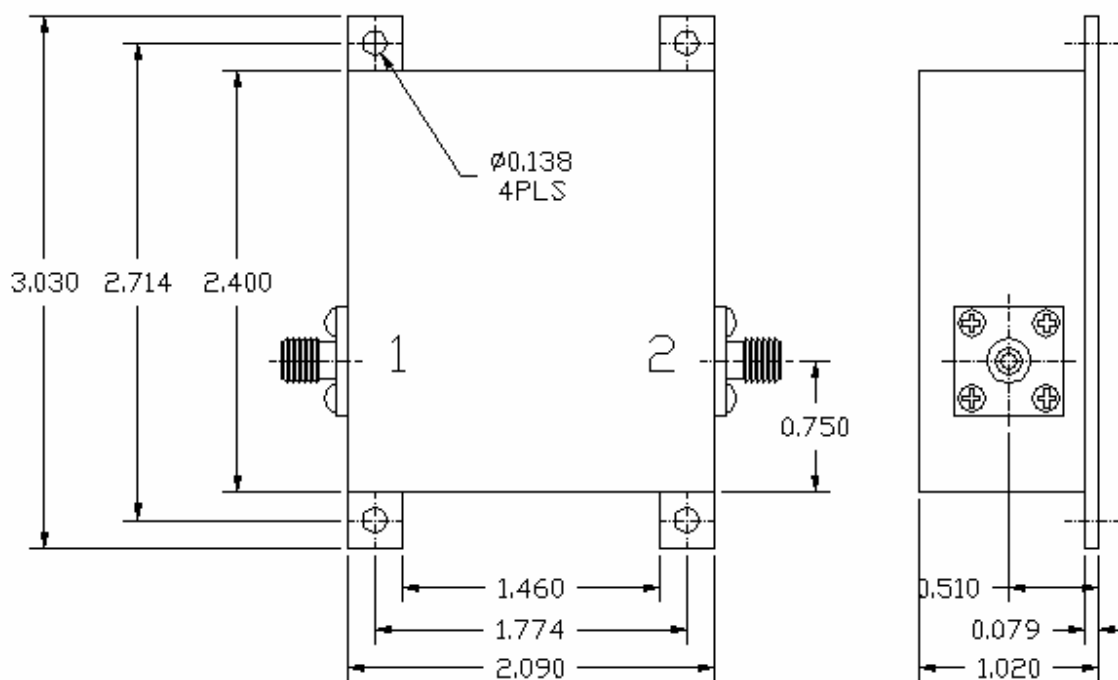


Key Features:

- Broadband operation, frequency range: 225~450MHz full band or partial band
- SMA or N-type connectors,
- Small size, low cost
- Power handling up to +80 Watts

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2020-0312-56	225~400	1.0 Max	≥ 17	≤ 1.40	≥ 80	-20 ~ +55
F2020-0338-67	225~450	1.0 Max	≥ 16	≤ 1.40	≥ 40	-20 ~ +55

Mechanical Structure:

Note: All units are in inches.

Ordering Information:

F2020-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency X.XXX GHz,

Typical Test Results for F2020-0312-56:

