

Surface Mount

Voltage Controlled Oscillator

Ultra Low Noise 1260 to 1310 MHz

ROS-1310C+

Features

- ultra low phase noise
- linear tuning characteristics
- low pushing
- low pulling
- aqueous washable



CASE STYLE: CK1113
PRICE: \$ 26.95 ea. QTY (5-49)

Applications

- wireless communications
- cellular infrastructure

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Electrical Specifications

MODEL NO.	FREQ. (MHz)	POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz	TUNING				NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)	PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
				VOLTAGE RANGE	SENSITIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)					Vcc Current (volts) Max.	Current (mA) Max.
	Min. Max.	Typ.	1 10 100 1000	Min. Max. Typ. Typ.	Typ.	Typ.	Typ.	Typ. Max.	Typ.	Typ.	Typ.		
ROS-1310C+	1260 1310	+3	-95 -120 -140 -159	0.5 20 2.5 - 5	40	120	-90	-25 -13	0.20	0.10	5	35	

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Outline Drawing

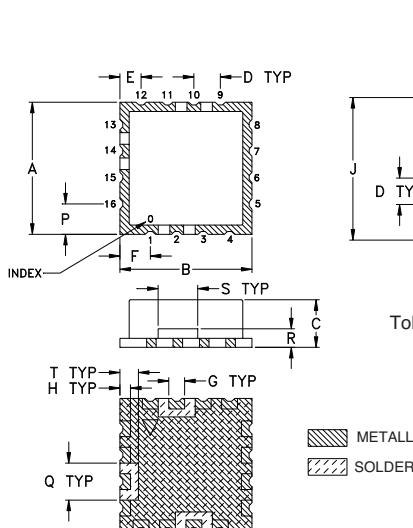


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	6V
Absolute Max. Tuning Voltage (Vtune)	22V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Demo Board MCL P/N: TB-10
Suggested PCB Layout (PL-012)

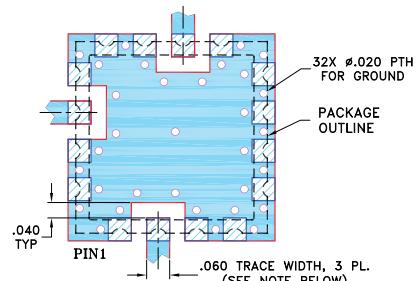

NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.

[Blue Box] DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

[White Box with Blue Hatching] DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.220	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070 grams	

12.70 12.70 5.59 2.54 2.03 2.92 1.52 1.02 13.72 1.52 2.54 3.43 3.43 2.92 3.56 1.78 3.81 1.78 1.2

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

I/F/R MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site







Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Performance Data & Curves*

ROS-1310C+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1285 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	5.35	1251.4	1248.1	1246.6	3.25	3.51	2.81	28.90	-32.7	-37.7	-50.7	0.03	0.21	-96.2	-121.1	-141.2	-160.0	1.0	-95.11
0.50	5.08	1254.0	1250.8	1249.4	3.28	3.53	2.85	28.97	-32.6	-37.4	-49.1	0.04	0.21	-97.1	-121.8	-140.8	-159.6	2.1	-103.93
2.00	4.78	1261.3	1258.3	1257.0	3.34	3.53	2.92	29.12	-32.4	-36.5	-44.4	0.06	0.22	-98.4	-122.5	-140.8	-158.4	3.5	-109.70
3.00	4.83	1266.0	1263.0	1261.8	3.30	3.47	2.90	29.18	-32.9	-35.1	-42.8	0.07	0.21	-97.4	-120.9	-140.6	-157.6	6.1	-115.13
4.00	4.78	1270.8	1267.9	1266.6	3.21	3.39	2.84	29.22	-33.6	-33.9	-42.1	0.09	0.18	-96.0	-121.1	-141.0	-159.0	8.7	-119.20
5.00	4.66	1275.5	1272.7	1271.4	3.12	3.31	2.75	29.23	-34.5	-33.6	-41.5	0.11	0.13	-95.9	-122.6	-141.1	-158.9	10.0	-121.18
6.00	4.52	1280.2	1277.3	1276.1	3.06	3.22	2.67	29.22	-35.3	-33.4	-39.4	0.12	0.09	-95.3	-121.1	-140.1	-158.9	21.1	-127.16
7.00	4.40	1284.6	1281.8	1280.7	2.98	3.12	2.59	29.20	-35.1	-33.0	-38.1	0.10	0.09	-95.0	-121.3	-140.6	-158.4	36.1	-131.96
8.00	4.30	1289.0	1286.2	1285.1	2.88	3.00	2.49	29.18	-34.9	-32.7	-36.1	0.08	0.12	-95.1	-121.3	-140.6	-158.3	61.6	-136.57
9.00	4.19	1293.2	1290.5	1289.4	2.76	2.86	2.37	29.16	-34.8	-32.1	-35.6	0.06	0.16	-94.0	-120.3	-139.8	-158.3	86.4	-138.30
10.00	4.03	1297.3	1294.7	1293.6	2.64	2.72	2.24	29.14	-35.7	-32.3	-35.7	0.05	0.19	-94.0	-119.9	-139.9	-157.4	100.0	-139.91
11.00	3.77	1301.3	1298.8	1297.6	2.53	2.61	2.13	29.10	-36.9	-31.7	-36.3	0.05	0.20	-94.2	-119.4	-139.5	-157.6	145.0	-143.10
12.00	3.49	1305.1	1302.5	1301.4	2.44	2.52	2.03	29.05	-35.3	-31.0	-35.7	0.04	0.20	-94.7	-119.8	-140.3	-157.5	170.2	-143.21
13.00	3.28	1308.6	1306.0	1304.9	2.36	2.46	1.95	28.99	-30.8	-29.8	-35.3	0.02	0.20	-95.2	-120.7	-140.1	-157.9	203.5	-144.93
14.00	3.12	1312.1	1309.3	1308.2	2.18	2.36	1.89	28.98	-26.8	-29.5	-35.3	0.12	0.20	-96.5	-121.2	-140.5	-158.6	285.6	-145.61
15.00	2.78	1315.3	1312.4	1311.2	1.89	2.15	1.76	29.09	-24.5	-29.8	-35.7	0.14	0.20	-98.1	-121.7	-141.6	-158.2	335.4	-146.76
16.00	2.49	1317.9	1315.2	1314.0	1.78	1.99	1.61	29.18	-24.8	-30.0	-35.6	0.07	0.20	-98.2	-121.4	-141.2	-158.2	470.7	-151.55
17.00	2.24	1320.4	1317.7	1316.6	1.74	1.91	1.51	29.21	-25.5	-30.5	-34.9	0.03	0.19	-96.4	-120.4	-140.5	-158.7	562.6	-153.37
19.00	1.72	1324.6	1321.9	1320.8	1.69	1.80	1.36	29.22	-26.4	-30.6	-34.5	0.03	0.17	-95.3	-121.2	-140.4	-158.1	927.2	-158.42
20.00	1.45	1326.3	1323.6	1322.5	1.67	1.77	1.32	29.21	-26.6	-30.4	-34.1	0.04	0.15	-95.9	-120.9	-140.4	-157.4	1000.0	-158.50

*at 25°C unless mentioned otherwise

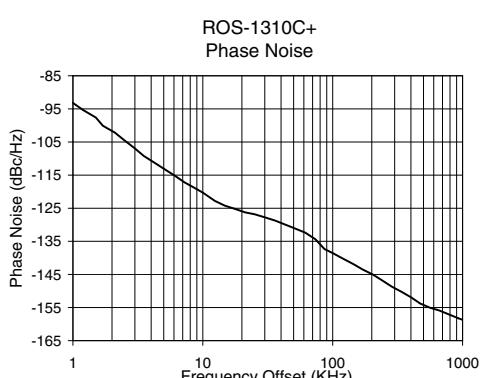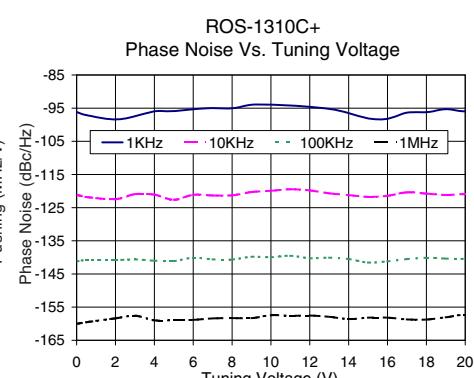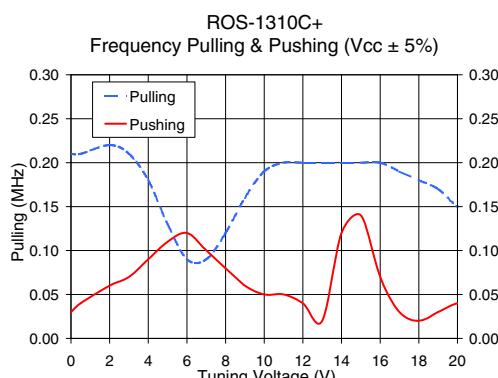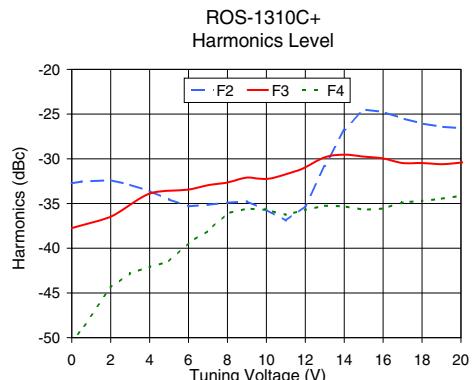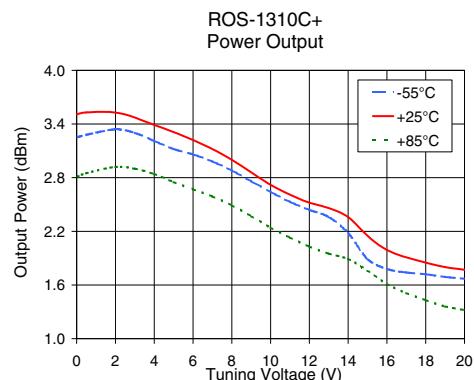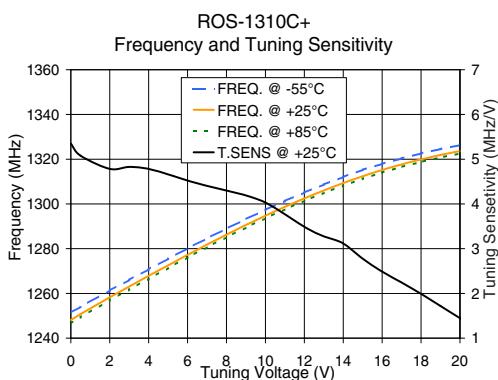

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.