

# Linear Phase Bandpass


## ◆ Features:

- Mini-Max Surface Package
- < 18 Degrees
- Flat Phase Over 100% of Passband
- Low Side Shape Factor 1.02:1 > 20 dB




## ◆ Specifications:

Insertion Loss:	5 dB @ 3375	Vibration:	MIL-STD 202	204A
Flatness:	1.5 dB, 3270 MHz-3480 MHz	Shock:	MIL-STD 202	213A
VSWR:	2.0:1 typical	Humidity:	MIL-STD 202	103B
Phase Linearity:	+/- 9° 3270 MHz to 3480 MHz +/- 4° 3290 MHz to 3470 MHz	Thermal Shock:	MIL-STD 202	107A
Stopband:	20 dB @ 3200 MHz 40 dB @ 10 MHz-3130 MHz 50 dB @ 3800 MHz-6000 MHz	Solderability:	MIL-STD 202 Method 208	Pins 4,5: +VDC Pins 8,9: Ground Pins 4,5: +VDC Pins 8,9: Ground

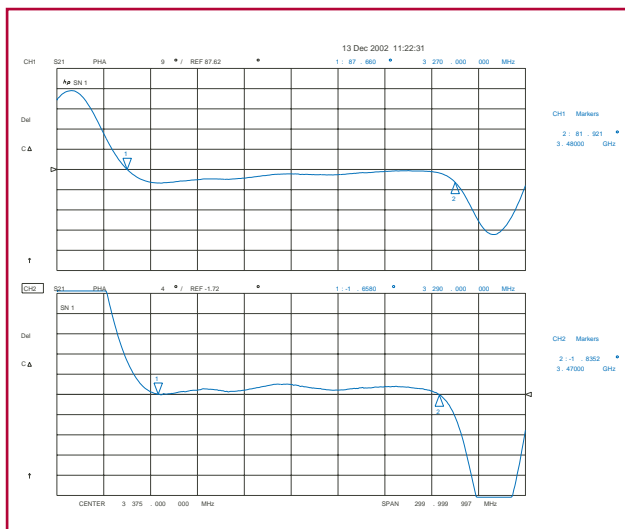

Amplitude

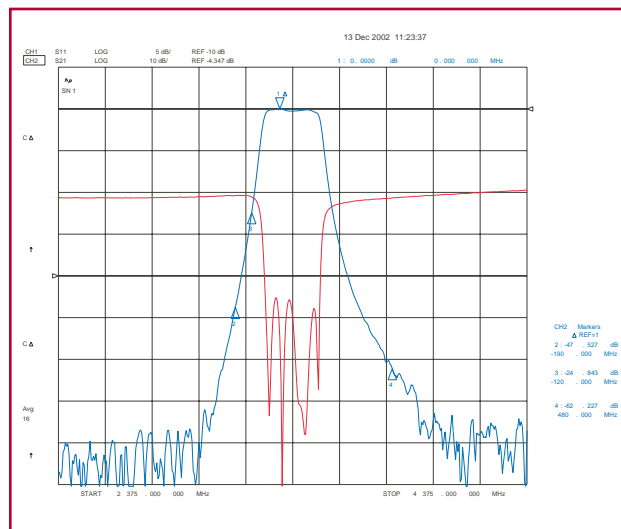

Phase

Filtering Solutions for Your Global Market

### USA

Phone: 410-749-2424  
FAX: 410-749-5725  
Email: sales@klmicrowave.com

### EUROPE

Phone: +44-(0)-1908-547920  
FAX: +44-(0)-1908-695284  
Email: sales@kleurope.com

Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)

