




RF-LAMBDA

The power beyond expectations

X-BAND WR112 60dB HIGH GAIN LOW NOISE POWER AMPLIFIERS

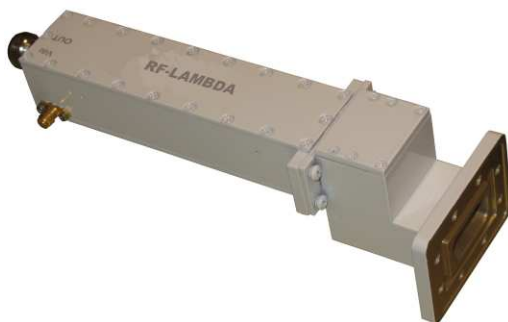

High Gain up to 60dB
Applicable for base station, repeaters of cellular network
LMDS multi-carrier operation
Aerospace and military applications
High Peak to average handle capability
High Linearity and low noise figure
All specifications can be modified upon request

Electrical Specifications			
Parameter	Notes	Type/ Max	Units
Gain		60/20,50(optional)	dB
Gain Flatness	Per 1000MHz Per 500MHz Per 40MHz	± 0.75 ± 0.5 ± 0.25	dB
VSWR	Input Output	1.25 / 1.5 1.5 / 2.0	
Power Output	at 1dB compression	$\geq +10/\geq +20$ (option)	dBm
Group Delay (per 40MHz)	Linear Parabolic Ripple	0.02 0.003 0.2	dBc nS/MHz nS/(MHz×MHz)
Gain Stability (room temperature)	60minutes 24 hours One week	± 0.1 ± 0.2 ± 0.5	dB/hour dB/day dB/week
Interface & Frequency	Input WR112	(7.05-10.0GHz)	Output (SMA/N)
Power Supply	Voltage Current	12-21 80	V mA
Operating Temperature	Outdoor	-40~+60	°C

PN: RLNAWXXGYY

Gain: 60dB / 50dB / 40dB / ... / 20dB

Waveguide Type W229 / W159 / W137



X-BAND WR112 60dB HIGH GAIN LOW NOISE POWER AMPLIFIERS



RF-LAMBDA

The power beyond expectations

DRAWING:

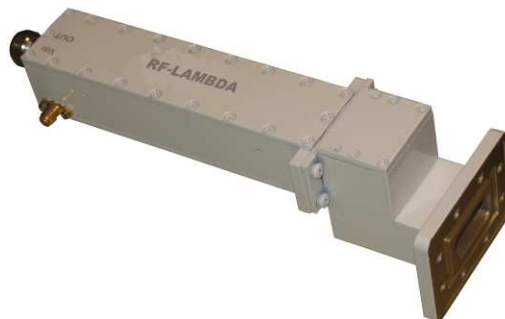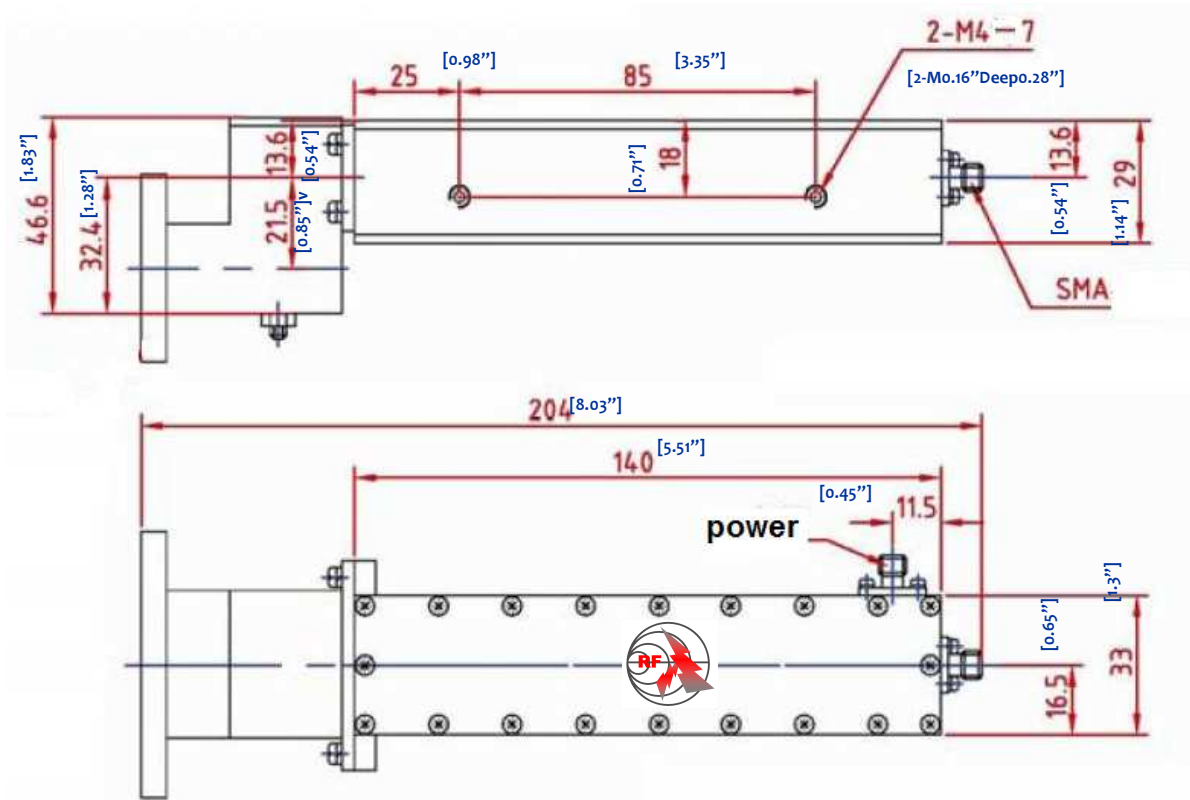

X-BAND WR112 60dB HIGH GAIN LOW NOISE POWER AMPLIFIERS