

Key Features:


- Center frequency operation in 3.5-7.0GHz
- SMA connectorized configuration
- Small size, low cost
- Power handling +20 Watts forward
- Operating temperature -40~+70°C



Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2153-0490-39	3.95-5.85	0.4 Max	≥ 20	≤ 1.25	≥ 10	10 Watts	-40 ~ +70
F2153-0565-12	5.30~6.00	0.4 Max	≥ 23	≤ 1.20	≥ 10	10 Watts	-40 ~ +70

Mechanical Structure:

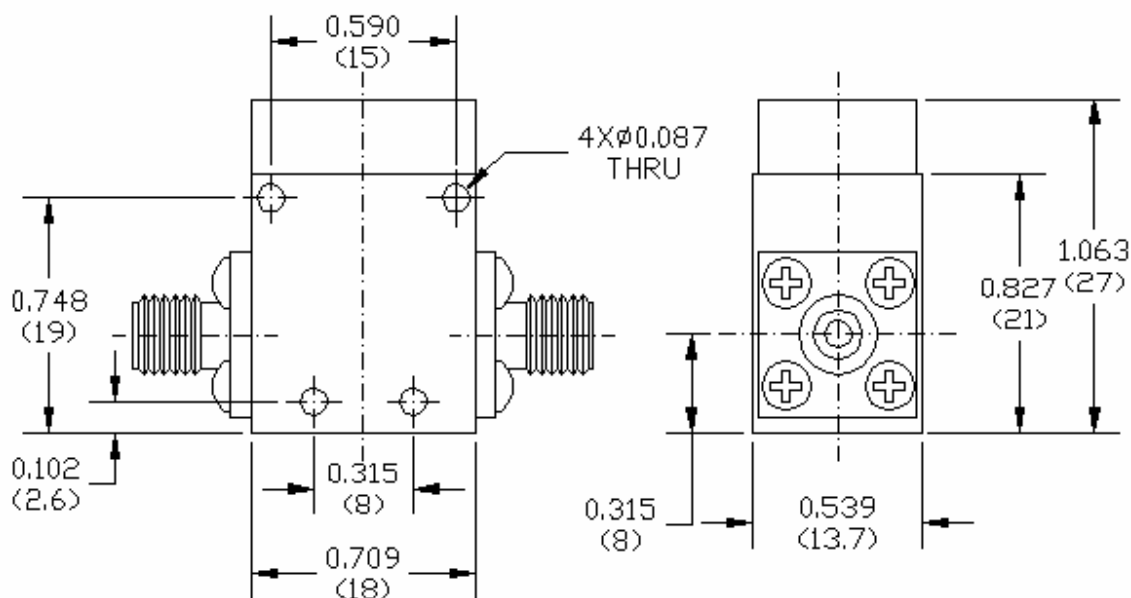

Note: All units in inches (mm)

Ordering Information:

