



- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-300MHz
- 1.2 VOLTAGE RATING: 500V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: NON CONSTANT
- 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
- 1.5 TEMPERATURE RANGE: -55°C TO +85°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: REXOLITE

- 2.2 CONTACT: BeCu
- 2.3 LOCKING RING: PHOS. BRONZE
- 2.4 ALL OTHER METAL PARTS: BRASS
- 3.0. FINISHES:  
BODY: NICKEL  
CONTACT: SILVER
- 4.0 MECHANICAL
- 4.1 INTERFACE IN ACCORDANCE WITH MIL-STD-348

NOTES:

1. ALL DIMENSIONS ARE REFERENCE ONLY .

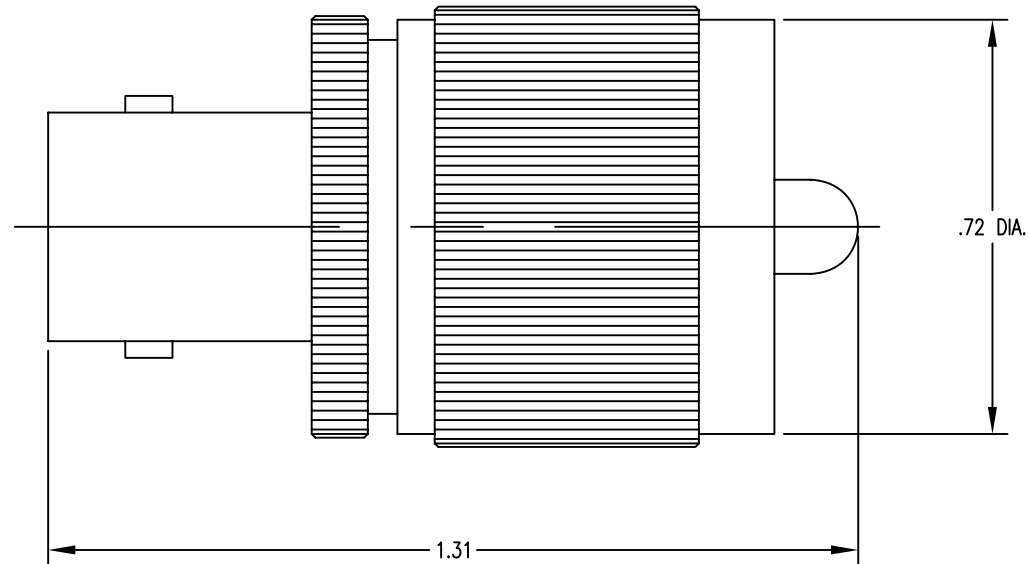

				PROPRIETARY THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.			 SAN • TRON, INC. 4 NEWBURYPORT TPK, IPSWICH, MA 01938				
B	UPDATED OL SPECS	6/5/08	JTH	FSH	REMOVE ALL BURRS AND SHARP EDGES .005 MAX. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING			TITLE ADAPTER-BNC(F)-UHF(F)			
A	ORIGINAL	1/10/97	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				MATERIAL:		FINISH: NICKEL CONTACT: SILVER	
Rev.	Revisions	Date	Dwn.	Appd.	UNSPECIFIED TOL.	DWN	KC	1/10/97	FSCM NO. 50896	DWG NO. OL-273-1	REV. B
					DEC. ± .005	CHKD	SJS	1/14/97			
	RECOM. STOCK SIZE	FT/M PCS	QTY REQD		ANG. ± 1/2°	APPR			SCALE 4:1		
					CONCENTRICITY .004 TIR <sup>63/</sup> ALL MACHINED SUFACES ✓						